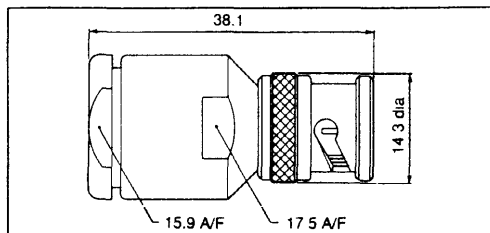


309667

290-920

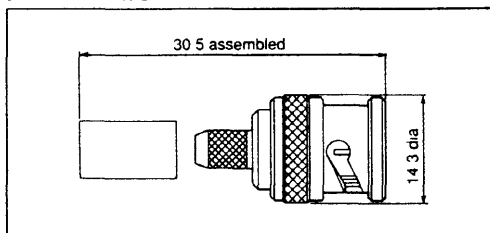
251 136
W W W W

Straight plugs

Solder centre contact,
clamp outer

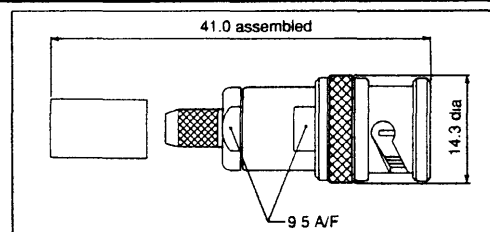
Impedance	Cable group ①	Part Number ②	
50 ohm	001	B35 A03 •001 X99	Captive contact, pressure sleeve cable clamp
50 ohm	004	B35 A03 •004 X99	As above

Assy
notes
page:
46 (a)
46 (a)

Crimp centre contact,
crimp outer

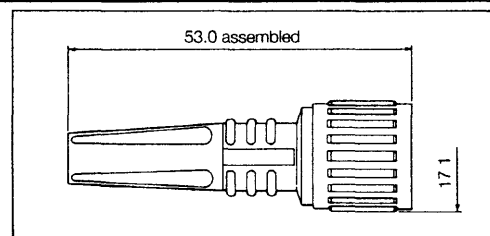
Impedance	Cable group ①	Part Number ②		
50 ohm	010	B35 A41 •010 X99		30040 or 30039
50 ohm	022	B35 A41 •022 X99		30040 or 30039
50 ohm	060	B35 A41 •060 X99		30040 or 30039
75 ohm	007	B37 A41 •007 X99		30039
75 ohm	012	B37 A41 •012 X99		30040 or 30039
75 ohm	022	B37 A41 •022 X99		30040 or 30039
75 ohm	A25	B37 A41 •A25 X99		30040 or 30039
75 ohm	B25	B37 A41 •B25 X99		30040 or 30039
75 ohm	B35	B37 A41 •B35 X99		30039
75 ohm	062	B37 A55 •062 X99		30039
75 ohm	117	B37 A55 •117 X99		30039
75 ohm	366	B37 A41 •366 X99		30040 or 30039

Assy
notes
page:
44 (a)
44 (b)
44 (a)
44 (a)
44 (a)
44 (b)
44 (a)
44 (a)
44 (a)
44 (a)
44 (a)
44 (a)
44 (a)

BT crimp, crimp centre
contact crimp outer

Impedance	Cable group ①	Part Number ②		
75 ohm	030	B37 A91 •030 X99	Crimp and clamp together design	30039
75 ohm	062	B37 A91 •062 X99	As above	30039
75 ohm	117	B37 A91 •117 X99	As above	30039

Assy
notes
page:
48 (a)
48 (a)
48 (a)

Insulated plug,
crimp centre contact,
crimp outer

Impedance	Cable group ①	Part Number ② ④		
50 ohm	B10	B35 A04 •B10 X99 Grey		30040 or 30039
75 ohm	B25	B37 A04 •B25 X99 Black		30040 or 30039

Assy
notes
page:
44 (a)
44 (a)

- ① For cable group to cable type cross reference see fold out section of rear cover
 ② Replace the • in the part number with required plating code, see page 8 for details
 ③ Crimp tool 30039 requires separate dies, for all details on tooling see page 40
 ④ Other colours available. Please contact the Sales Office

† Preferred items

Please contact the Sales Office for any uncatalogued requirements