Preliminary

Previous version: -----

: Dec. 1999

This version

1,048,576-Word × 16-Bit or 2,097,152-Word × 8-Bit One Time PROM

GENERAL DESCRIPTION

The MR27V1602E is a 16 Mbit electrically Programmable Read-Only Memory that can be electrically switched between 1,048,576-word \times 16-bit and 2,097,152-word \times 8-bit configurations. This device operates on a single +3.3V power supply, and all inputs and outputs are TTL compatible. Because of its asynchronous operation, it requires no external clocks, making this device easy-to-use.


The MR27V1602E is suitable as large-capacity fixed memory for microcomputers and data terminals. It is manufactured using a CMOS double silicon gate technology and is offered in 44-pin SOP, 44-pin TSOP(II) or 48-pin TSOP(I) packages.

FEATURES

- · 1,048,576-word × 16-bit/2,097,152-word × 8-bit electrically switchable configuration
- · +3.3 V power supply
- Access time
 Operating current
 Standby current
 MAX
 30 mA MAX
 50 μA MAX
- · Input/Output TTL compatible
- · Three-state output
- · Packages:

44-pin plastic SOP (SOP44-P-600-1.27-K)(Product Name : MR27V1602EMA)44-pin plastic TSOP (TSOP II 44-P-400-0.80-K)(Product Name : MR27V1602ETP)48-pin plastic TSOP (TSOP I 48-P-1220-0.50-K)(Product Name : MR27V1602ETN)


PIN CONFIGURATION (TOP VIEW)

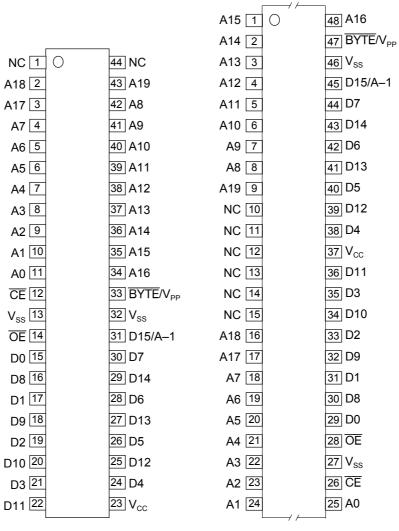

44-pin SOP, TSOP(II) 48-pin TSOP(I)

Pin name	Functions
D15/A-1	Data output/Address input
A0 to A19	Address input
D0 to D14	Data output
CE	Chip enable
ŌĒ	Output enable
BYTE/V _{PP}	Mode switch/Program power supply voltage
V _{cc}	Power supply voltage
V_{SS}	GND
NC	Non connection

BLOCK DIAGRAM

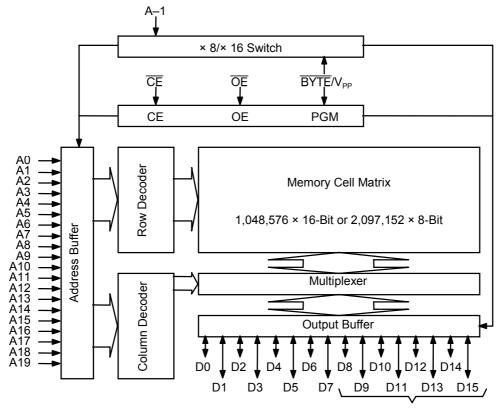

In 8-bit output mode, these pins are three-stated and pin D15 functions as the A-1 address pin.

FUNCTION TABLE

Mode	CE	ŌĒ	BYTE/V _{PP}	V _{CC}	D0 to D7	D8 to D14	D15/A-1	
Read (16-Bit)	L	L	Н			D_OUT		
Read (8-Bit)	L	L	L		D _{OUT}	Hi–Z	L/H	
Output diaabla	١.	Н	Н	3.3 V		Hi–Z		
Output disable	L	П	L	3.3 V		п⊢∠	*	
Ctandhy			Н			Hi–Z		
Standby	Н	*	L			*		
Program	L	Н				D _{IN}	_	
Program inhibit	Н	Н	9.75 V	4.0 V	Hi–Z			
Program verify	Н	L			D _{OUT}			

^{*:} Don't Care (H or L)

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Condition	Value	Unit
Operating temperature under bias	Та		0 to 70	°C
Storage temperature	Tstg	_	-55 to 125	°C
Input voltage	Vı		-0.5 to V _{CC} +0.5	V
Output voltage	Vo	malatice to V	-0.5 to V _{CC} +0.5	V
Power supply voltage	V _{cc}	relative to V _{SS}	–0.5 to 5	V
Program power supply voltage	V_{PP}		-0.5 to 11.5	V
Power dissipation per package	P _D	_	1.0	W

RECOMMENDED OPERATING CONDITIONS

 $(Ta = 0 \text{ to } 70^{\circ}C)$

Parameter	Symbol	Condition	Min.	Тур.	Max.	Unit
V _{cc} power supply voltage	V _{cc}		3.0	_	3.6	V
V _{PP} power supply voltage	V_{PP}	\/ - 2 0 to 2 0 \/	-0.5	_	V _{CC} +0.5	V
Input "H" level	V _{IH}	$V_{CC} = 3.0 \text{ to } 3.6 \text{ V}$	2.2	_	V _{CC} +0.5*	V
Input "L" level	V _{IL}		-0.5**	_	0.6	V

Voltage is relative to $V_{\mbox{\scriptsize SS}}.$

- * : Vcc+1.5V(Max.) when pulse width of overshoot is less than 10ns.
- **: -1.5V(Min.) when pulse width of undershoot is less than 10ns.

ELECTRICAL CHARACTERISTICS

DC Characteristics

 $(V_{CC} = 3.3 \text{ V} \pm 0.3 \text{ V}, \text{Ta} = 0 \text{ to } 70^{\circ}\text{C})$

parameter	Symbol	Condition	Min.	Тур.	Max.	Unit
Input leakage current	I _{LI}	$V_I = 0$ to V_{CC}	1	_	10	μΑ
Output leakage current	I _{LO}	$V_{\rm O}$ = 0 to $V_{\rm CC}$		_	10	μΑ
V _{CC} power supply current	I _{ccsc}	Œ = V _{cc}	_	_	50	μΑ
(Standby)	I _{CCST}	CE = V _{IH}	1	_	1	mA
V _{cc} power supply current (Read)	I _{CCA}	$\overline{CE} = V_{IL}, \overline{OE} = V_{IH}$ tc = 90 ns	_	_	30	mA
V _{PP} power supply current	I _{PP}	$V_{PP} = V_{CC}$	_	_	10	μΑ
Input "H" level	V _{IH}	_	2.2	_	V _{CC} +0.5*	V
Input "L" level	V _{IL}	_	-0.5**	_	0.6	V
Output "H" level	V _{OH}	$I_{OH} = -2 \text{ mA}$	2.4	_	_	V
Output "L" level	V_{OL}	I _{OL} = 4 mA	_	_	0.4	V

Voltage is relative to $V_{\rm SS}$.

- * : Vcc+1.5V(Max.) when pulse width of overshoot is less than 10ns.
- **: -1.5V(Min.) when pulse width of undershoot is less than 10ns.


AC Characteristics

 $(V_{CC} = 3.3 \text{ V} \pm 0.3 \text{ V}, \text{Ta} = 0 \text{ to } 70^{\circ}\text{C})$

Symbol	Condition	Min.	Max.	Unit
$t_{\scriptscriptstyle{\mathrm{C}}}$		90	_	ns
t _{ACC}	$\overline{CE} = \overline{OE} = V_{IL}$		90	ns
t _{CE}	OE = V _{IL}	_	90	ns
t _{OE}	CE = V _{IL}		45	ns
t _{CHZ}	OE = V _{IL}	0	30	ns
t _{OHZ}	CE = V _{IL}	0	25	ns
t _{OH}	$\overline{CE} = \overline{OE} = V_{IL}$	0	_	ns
	t _C t _{ACC} t _{CE} t _{OE} t _{CHZ}	$\begin{array}{c c} & t_{C} & - \\ \hline & t_{ACC} & \overline{CE} = \overline{OE} = V_{IL} \\ \hline & t_{CE} & \overline{OE} = V_{IL} \\ \hline & t_{OE} & \overline{CE} = V_{IL} \\ \hline & t_{CHZ} & \overline{OE} = V_{IL} \\ \hline & t_{OHZ} & \overline{CE} = V_{IL} \\ \hline \end{array}$	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$


Measurement conditions

Input signal level ------ 0 V/3 V
Input timing reference level ------ 0.8 V/2.0 V
Output load------ 100 pF
Output timing reference level ----- 0.8 V/2.0 V




TIMING CHART (READ CYCLE)

16-Bit Read Mode (BYTE = V_{IH})

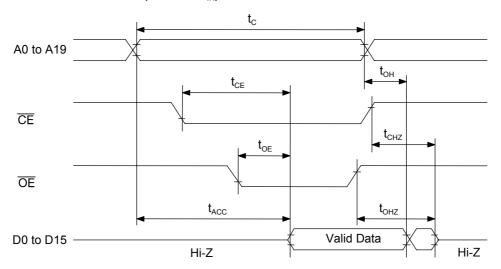

8-Bit Read Mode (BYTE = V_{IL})

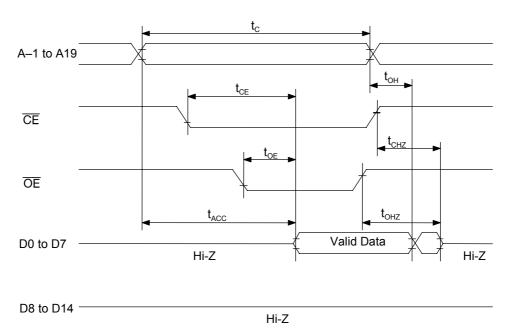

ELECTRICAL CHARACTERISTICS (PROGRAMMING OPERATION)

DC Characteristics

 $(Ta = 25^{\circ}C \pm 5^{\circ}C)$

Parameter	Symbol	Condition	Min.	Тур.	Max.	Unit
Input leakage current	ILI	$V_1 = V_{CC} + 0.5 V$	_	_	10	μΑ
V _{PP} power supply current (Program)	I _{PP2}	CE = V _{IL}	_	_	50	mA
V _{CC} power supply current	I _{cc}	_	_	_	50	mA
Input "H" level	V_{IH}	_	3.0	_	V _{CC} +0.5	V
Input "L" level	V_{IL}	_	-0.5	_	0.8	V
Output "H" level	V_{OH}	I _{OH} = -400 μA	2.4	_	_	V
Output "L" level	V _{OL}	I _{OL} = 2.1 mA	_	_	0.45	V
Program voltage	V_{PP}	_	9.5	9.75	10.0	V
V _{CC} power supply voltage	V_{CC}	_	3.9	4.0	4.1	V

Voltage is relative to V_{SS} .

AC Characteristics

 $(V_{CC} = 4.0 \text{ V} \pm 0.1 \text{ V}, \overline{\text{BYTE}}/V_{PP} = 9.75 \text{ V} \pm 0.25 \text{ V}, \text{ Ta} = 25^{\circ}\text{C} \pm 5^{\circ}\text{C})$

(- 66		, — · · — · · pp		- , -	/
Symbol	Condition	Min.	Тур.	Max.	Unit
t _{AS}	_	100		_	ns
t _{OES}	_	2	1	_	μs
t _{DS}	_	100		_	ns
t _{AH}	_	2	_	_	μs
t _{DH}	_	100	1	_	ns
t _{OHZ}	_	0		100	ns
t _{vs}	_	2	_	_	μs
t _{PW}	_	9	10	11	μs
t _{OE}	_	_	1	100	ns
t _{AOH}	_	0	_	_	ns
	$\begin{array}{c} \text{Symbol} \\ t_{\text{AS}} \\ t_{\text{OES}} \\ t_{\text{DS}} \\ t_{\text{AH}} \\ t_{\text{DH}} \\ t_{\text{OHZ}} \\ t_{\text{VS}} \\ t_{\text{PW}} \\ t_{\text{OE}} \\ \end{array}$	$\begin{array}{c cccc} Symbol & Condition \\ \hline t_{AS} & \\ \hline t_{OES} & \\ \hline t_{DS} & \\ \hline t_{AH} & \\ \hline t_{OHZ} & \\ \hline t_{VS} & \\ \hline t_{PW} & \\ \hline t_{OE} & \\ \hline \end{array}$	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$


Pin Check Function

Pin Check Function is to check contact between each device-pin and each socket-lead with EPROM programmer. Setting up address as following condition call the preprogrammed codes on device outputs.


$(V_{CC} = 3.3 \text{ V} \pm 0.3 \text{ V}, \overline{CE} = V_{IL}, \overline{OE} = V_{IL}, \overline{BYTE}/V_{PP} = V_{IH}, Ta = 25^{\circ}C \pm 0.3 \text{ V}$												C ± 5°C)								
A0	A1	A2	А3	A4	A5	A6	A7	A8	A9	A10	A11	A12	A13	A14	A15	A16	A17	A18	A19	DATA
0	1	0	1	0	1	0	1	0	VH*	0	1	0	1	0	1	0	0	1	1	FF00
1	0	1	0	1	0	1	0	1	VH*	1	0	1	0	1	0	1	1	0	0	00FF
	Other conditions											FFFF								

*: VH = 8 V ± 0.25 V


Consecutive Programming Waveforms

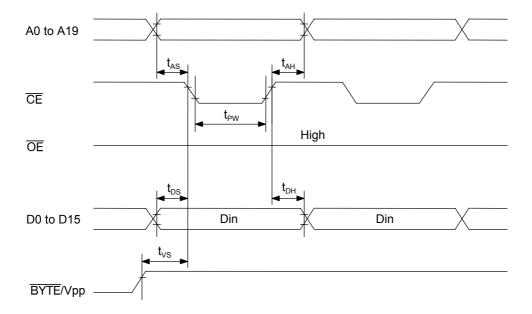

Consecutive Program Verify Waveforms

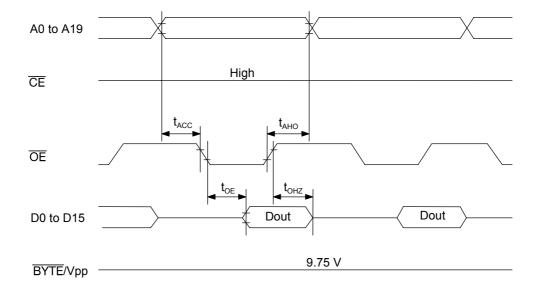

Program and Program Verify Cycle Waveforms

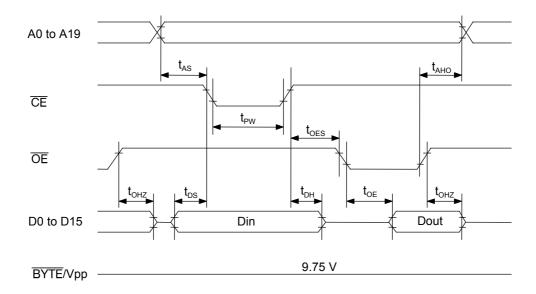


Pin Capacitance

 $(V_{CC} = 3.3 \text{ V}, \text{ Ta} = 25^{\circ}\text{C}, \text{ f} = 1 \text{ MHz})$

Parameter	Symbol	Condition	Min.	Тур.	Max.	Unit
Input	C _{IN1}	V, = 0 V	_	_	8	
BYTE/V _{PP}	C _{IN2}	V ₁ = 0 V	_	_	120	pF
Output	C _{OUT}	V ₀ = 0 V	_	_	10	

Programming/Verify Flow Chart

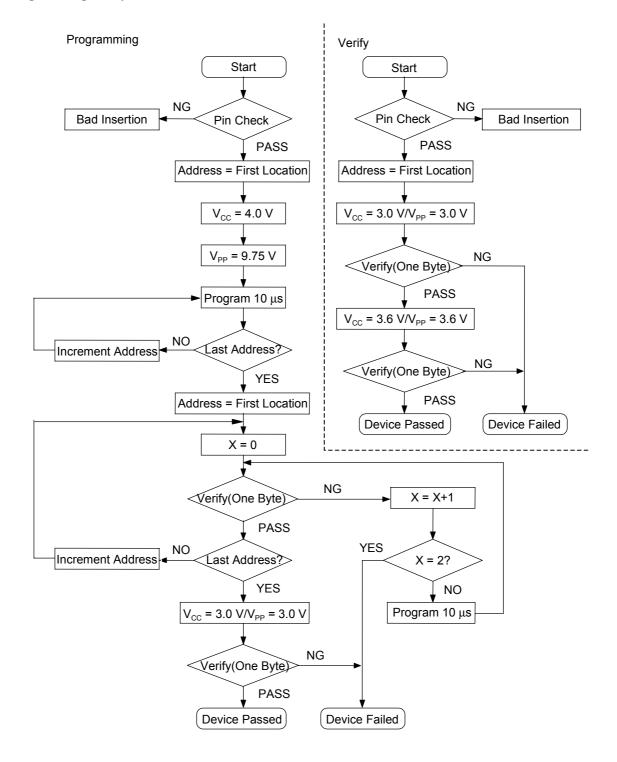

NOTICE

- 1. The information contained herein can change without notice owing to product and/or technical improvements. Before using the product, please make sure that the information being referred to is up-to-date.
- 2. The outline of action and examples for application circuits described herein have been chosen as an explanation for the standard action and performance of the product. When planning to use the product, please ensure that the external conditions are reflected in the actual circuit, assembly, and program designs.
- 3. When designing your product, please use our product below the specified maximum ratings and within the specified operating ranges including, but not limited to, operating voltage, power dissipation, and operating temperature.
- 4. Oki assumes no responsibility or liability whatsoever for any failure or unusual or unexpected operation resulting from misuse, neglect, improper installation, repair, alteration or accident, improper handling, or unusual physical or electrical stress including, but not limited to, exposure to parameters beyond the specified maximum ratings or operation outside the specified operating range.
- 5. Neither indemnity against nor license of a third party's industrial and intellectual property right, etc. is granted by us in connection with the use of the product and/or the information and drawings contained herein. No responsibility is assumed by us for any infringement of a third party's right which may result from the use thereof.
- 6. The products listed in this document are intended for use in general electronics equipment for commercial applications (e.g., office automation, communication equipment, measurement equipment, consumer electronics, etc.). These products are not authorized for use in any system or application that requires special or enhanced quality and reliability characteristics nor in any system or application where the failure of such system or application may result in the loss or damage of property, or death or injury to humans. Such applications include, but are not limited to, traffic and automotive equipment, safety devices, aerospace equipment, nuclear power control, medical equipment, and life-support systems.
- 7. Certain products in this document may need government approval before they can be exported to particular countries. The purchaser assumes the responsibility of determining the legality of export of these products and will take appropriate and necessary steps at their own expense for these.
- 8. No part of the contents contained herein may be reprinted or reproduced without our prior permission.

Copyright 1999 Oki Electric Industry Co., Ltd.