2SJ248

Silicon P-Channel MOS FET

HITACHI


Application

High speed power switching

Features

- Low on-resistance
- High speed switching
- Low drive current
- 4 V gate drive device can be driven from 5 V source
- Suitable for switching regulator, DC-DC converter

Outline

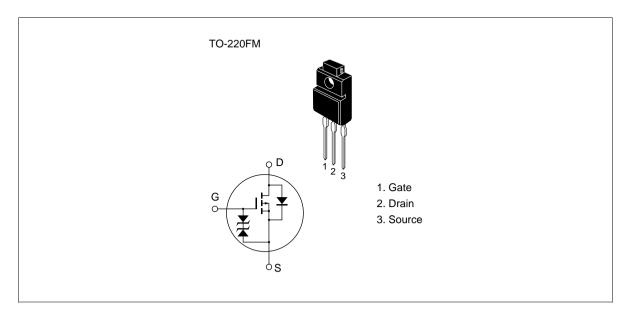



2SJ248

Absolute Maximum Ratings (Ta = 25° C)

Item	Symbol	Ratings	Unit
Drain to source voltage	V _{DSS}	-100	V
Gate to source voltage	V _{GSS}	±20	V
Drain current	I _D	-8	А
Drain peak current	I D(pulse) * 1	-32	А
Body to drain diode reverse drain current	I _{DR}	-8	А
Channel dissipation	Pch*2	25	W
Channel temperature	Tch	150	٥C
Storage temperature	Tstg	-55 to +150	٥°

Notes: 1. PW \leq 10 μ s, duty cycle \leq 1%

2. Value at $T_c = 25^{\circ}C$

HITACHI


Electrical Characteristics (Ta = 25°C)


Item	Symbol	Min	Тур	Max	Unit	Test conditions
Drain to source breakdown voltage	$V_{(\text{BR})\text{DSS}}$	-100	—		V	$I_{\rm D} = -10$ mA, $V_{\rm GS} = 0$
Gate to source breakdown voltage	$V_{(BR)GSS}$	±20	_		V	$I_{G} = \pm 100 \ \mu A, \ V_{DS} = 0$
Gate to source leak current	I _{GSS}	_	_	±10	μA	$V_{GS} = \pm 16 \text{ V}, V_{DS} = 0$
Zero gate voltage drain current	I _{DSS}	—		-250	μΑ	$V_{\rm DS} = -80$ V, $V_{\rm GS} = 0$
Gate to source cutoff voltage	$V_{\text{GS(off)}}$	-1.0		-2.0	V	$I_{\rm D} = -1$ mA, $V_{\rm DS} = -10$ V
Static drain to source on state	$R_{DS(on)}$	_	0.25	0.3	Ω	$I_{\rm D} = -4$ A, $V_{\rm GS} = -10$ V ^{*1}
resistance		_	0.3	0.45	Ω	$I_{\rm D} = -4$ A, $V_{\rm GS} = -4$ V ^{*1}
Forward transfer admittance	y _{fs}	3.0	5.5	—	S	$I_{\rm D} = -4$ A, $V_{\rm DS} = -10$ V ^{*1}
Input capacitance	Ciss	_	880		pF	$V_{\rm DS} = -10 \ V, \ V_{\rm GS} = 0,$
Output capacitance	Coss	_	325		pF	f = 1 MHz
Reverse transfer capacitance	Crss	—	80		pF	
Turn-on delay time	t _{d(on)}	—	12		ns	$I_{\rm D} = -4$ A, $V_{\rm GS} = -10$ V,
Rise time	t,	_	47		ns	$R_{L} = 2 \Omega$
Turn-off delay time	t _{d(off)}	—	150		ns	_
Fall time	t _f	_	75	_	ns	
Body to drain diode forward voltage	V_{DF}	—	-1.0		V	$I_{\rm F} = -8$ A, $V_{\rm GS} = 0$
Body to drain diode reverse recovery time	t _{rr}	—	170	_	ns	$I_{F} = -8 \text{ A}, V_{GS} = 0,$ $di_{F}/dt = 50 \text{ A}/\mu s$
Note: 1 Pulse test						α _F , αι = 0077μ3

Note: 1. Pulse test


See characteristic curves of 2SJ247

2SJ248

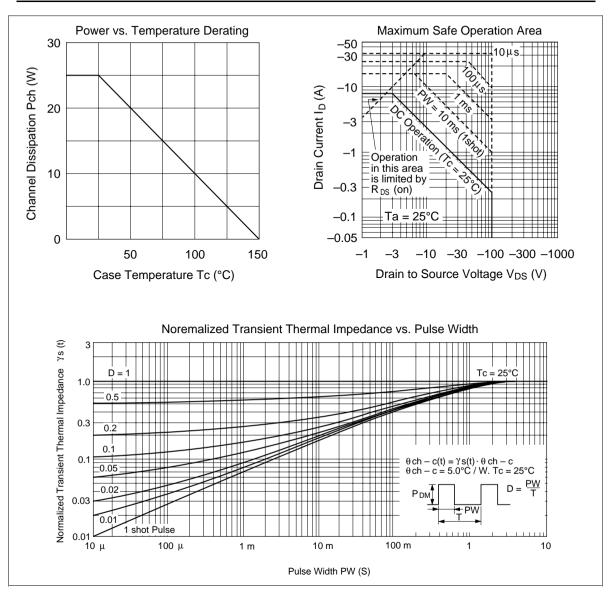

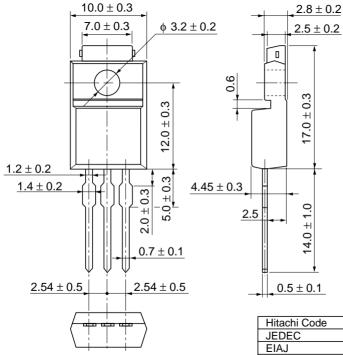

Unit: mm



Hitachi Code	TO-220FM
JEDEC	
EIAJ	Conforms
Weight (reference value)	1.8 g

Cautions

- Hitachi neither warrants nor grants licenses of any rights of Hitachi's or any third party's patent, copyright, trademark, or other intellectual property rights for information contained in this document. Hitachi bears no responsibility for problems that may arise with third party's rights, including intellectual property rights, in connection with use of the information contained in this document.
- 2. Products and product specifications may be subject to change without notice. Confirm that you have received the latest product standards or specifications before final design, purchase or use.
- 3. Hitachi makes every attempt to ensure that its products are of high quality and reliability. However, contact Hitachi's sales office before using the product in an application that demands especially high quality and reliability or where its failure or malfunction may directly threaten human life or cause risk of bodily injury, such as aerospace, aeronautics, nuclear power, combustion control, transportation, traffic, safety equipment or medical equipment for life support.
- 4. Design your application so that the product is used within the ranges guaranteed by Hitachi particularly for maximum rating, operating supply voltage range, heat radiation characteristics, installation conditions and other characteristics. Hitachi bears no responsibility for failure or damage when used beyond the guaranteed ranges. Even within the guaranteed ranges, consider normally foreseeable failure rates or failure modes in semiconductor devices and employ systemic measures such as fail-safes, so that the equipment incorporating Hitachi product does not cause bodily injury, fire or other consequential damage due to operation of the Hitachi product.
- 5. This product is not designed to be radiation resistant.
- 6. No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without written approval from Hitachi.
- 7. Contact Hitachi's sales office for any questions regarding this document or Hitachi semiconductor products.



Semiconductor & Integrated Circuits. Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan Tel: Tokyo (03) 3270-2111 Fax: (03) 3270-5109 NorthAmerica URL http:semiconductor.hitachi.com/ http://www.hitachi-eu.com/hel/ecg Europe http://www.has.hitachi.com.sg/grp3/sicd/index.htm http://www.hitachi.com.tw/E/Product/SICD_Frame.htm Asia (Singapore) Asia (Taiwan) Asia (HongKong) http://www.hitachi.com.hk/eng/bo/grp3/index.htm http://www.hitachi.co.jp/Sicd/indx.htm Japan For further information write to: Hitachi Semiconductor Hitachi Europe GmbH Hitachi Asia Pte. Ltd. (America) Inc. Electronic components Group 16 Collyer Quay #20-00 179 East Tasman Drive, Dornacher Stra§e 3 Hitachi Tower San Jose,CA 95134 D-85622 Feldkirchen, Munich Singapore 049318 Tel: <1> (408) 433-1990 Fax: <1>(408) 433-0223 Germany Tel: 535-2100 Tel: <49> (89) 9 9180-0 Fax: 535-1533 Fax: <49> (89) 9 29 30 00

 Fax: <49> (89) 9 29 30 00
 Hita

 Hitachi Europe Ltd.
 Hita

 Electronic Components Group.
 Taip

 Whitebrook Park
 3F,

 Lower Cookham Road
 Tun

 Maidenhead
 Tel:

 Berkshire SL6 8YA, United Kingdom
 Fax

 Tel: <44> (1628) 585000

 Fax: <44> (1628) 778322

Hitachi Asia Ltd. Taipei Branch Office 3F, Hung Kuo Building. No.167, Tun-Hwa North Road, Taipei (105) Tel: <886> (2) 2718-3666 Fax: <886> (2) 2718-8180

HITACHI

Hitachi Asia (Hong Kong) Ltd. Group III (Electronic Components) 7/F., North Tower, World Finance Centre, Harbour City, Canton Road, Tsim Sha Tsui, Kowloon, Hong Kong Tel: <852> (2) 735 9218 Fax: <852> (2) 730 0281 Telex: 40815 HITEC HX

Copyright ' Hitachi, Ltd., 1999. All rights reserved. Printed in Japan.