

MEDIUM POWER NPN SILICON TRANSISTOR


- SGS-THOMSON PREFERRED SALES TYPE
- NPN TRANSISTOR
- FAST SWITCHING SPEED
- LOW COLLECTOR Emitter SATURATION

APPLICATIONS


- SWITCHING REGULATORS
- MOTOR CONTROL

DESCRIPTION

The BUV26 is a Multiepitaxial Planar NPN Transistor in TO-220 package. It is intended for use in high frequency and efficiency converters, switching regulators and motor control.

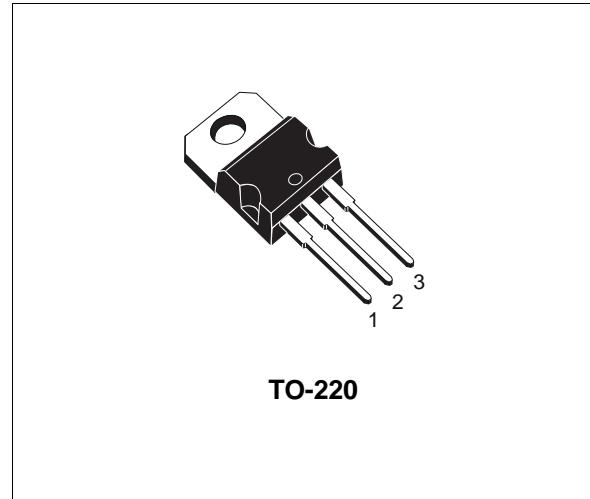

INTERNAL SCHEMATIC DIAGRAM

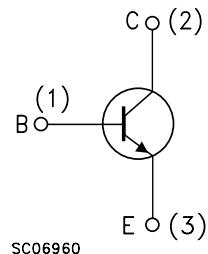

SC06960

ABSOLUTE MAXIMUM RATINGS

| Symbol | Parameter | Value | Unit |
|-----------|--|-------------|------|
| V_{CBO} | Collector-base Voltage ($I_E = 0$) | 180 | V |
| V_{CEO} | Collector-Emitter Voltage ($I_B = 0$) | 90 | V |
| V_{EBO} | Emitter-Base Voltage ($I_C = 0$) | 7 | V |
| I_C | Emitter Current | 14 | A |
| I_{CM} | Collector Peak Current ($t_p < 10\text{ms}$) | 25 | A |
| I_B | Base Current | 4 | A |
| I_{BM} | Base Peak Current ($t_p < 10\text{ms}$) | 6 | A |
| P_{tot} | Total Dissipation at $T_c < 25^\circ\text{C}$ | 85 | W |
| P_{tot} | Total Dissipation at $T_c < 60^\circ\text{C}$ | 65 | W |
| T_{stg} | Storage Temperature | -65 to +175 | °C |
| T_j | Max. Operating Junction Temperature | 175 | °C |

BUV26

THERMAL DATA

| | | | | |
|-----------------------|----------------------------------|-----|------|------|
| R _{thj-case} | Thermal Resistance Junction-case | Max | 1.76 | °C/W |
|-----------------------|----------------------------------|-----|------|------|


ELECTRICAL CHARACTERISTICS ($T_{case} = 25^{\circ}\text{C}$ unless otherwise specified)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|---|--|---|------|---------------------|------------------|----------------|
| I _{CER} | Collector Cut-off Current ($R_{BE} = 50\Omega$) | $V_{CE} = 180\text{V}$ $T_c = 125^{\circ}\text{C}$ | | | 3 | mA |
| I _{CEx} | Collector Cut-off Current | $V_{CE} = 180\text{V}$ $V_{BE} = -1.5\text{V}$ $T_c = 125^{\circ}\text{C}$ | | | 1 | mA |
| I _{EBO} | Emitter Cut-off Current ($I_C = 0$) | $V_{EB} = 5\text{V}$ | | | 1 | mA |
| V _{CCEO(sus)*} | Collector-Emitter Sustaining Voltage | $I_C = 0.2\text{ A}$ $L = 25\text{mH}$ | 90 | | | V |
| V _{EBO} | Emitter-Base Voltage ($I_C = 0$) | $I_E = 50\text{mA}$ | 7 | | 30 | V |
| V _{CE(sat)*} | Collector-Emitter Saturation Voltage | $I_C = 6\text{A}$ $I_B = 0.6\text{A}$ $I_C = 12\text{A}$ $I_B = 1.2\text{A}$ | | | 0.6 1.5 | V |
| V _{BE(sat)*} | Base-Emitter Saturation Voltage | $I_C = 12\text{A}$ $I_B = 1.2\text{A}$ | | | 2 | V |
| t _{on} t _s t _f | RESISTIVE LOAD Turn-on Time Storage Time Fall Time | $V_{CC} = 50\text{V}$ $I_C = 12\text{A}$ $V_{BE} = -6\text{V}$ $I_{B1} = 1.2\text{A}$ $R_{BB} = 2.5\Omega$ | | 0.4 0.45 0.12 | 0.6 1 0.25 | ms μs μs |
| t _s t _f | INDUCTIVE LOAD Storage time Fall Time | $V_{CC} = 50\text{V}$ $I_C = 12\text{A}$ $V_{BE} = -5\text{V}$ $I_{B1} = 1.2\text{A}$ $L_B = -0.5\mu\text{H}$ | | 0.5 0.04 | | μs μs |
| t _s t _f | Storage Time Fall Time | $V_{CC} = 50\text{V}$ $I_C = 12\text{A}$ $V_{BE} = -5\text{V}$ $I_{B1} = 1.2\text{A}$ $L_B = -0.5\mu\text{H}$ $T_j = 125^{\circ}\text{C}$ | | | 2 0.15 | μs μs |

* Pulsed: Pulse duration = 300μs, duty cycle = 1.5 %

TO-220 MECHANICAL DATA

| DIM. | mm | | | inch | | |
|------|-------|------|-------|-------|-------|-------|
| | MIN. | TYP. | MAX. | MIN. | TYP. | MAX. |
| A | 4.40 | | 4.60 | 0.173 | | 0.181 |
| C | 1.23 | | 1.32 | 0.048 | | 0.051 |
| D | 2.40 | | 2.72 | 0.094 | | 0.107 |
| D1 | | 1.27 | | | 0.050 | |
| E | 0.49 | | 0.70 | 0.019 | | 0.027 |
| F | 0.61 | | 0.88 | 0.024 | | 0.034 |
| F1 | 1.14 | | 1.70 | 0.044 | | 0.067 |
| F2 | 1.14 | | 1.70 | 0.044 | | 0.067 |
| G | 4.95 | | 5.15 | 0.194 | | 0.203 |
| G1 | 2.4 | | 2.7 | 0.094 | | 0.106 |
| H2 | 10.0 | | 10.40 | 0.393 | | 0.409 |
| L2 | | 16.4 | | | 0.645 | |
| L4 | 13.0 | | 14.0 | 0.511 | | 0.551 |
| L5 | 2.65 | | 2.95 | 0.104 | | 0.116 |
| L6 | 15.25 | | 15.75 | 0.600 | | 0.620 |
| L7 | 6.2 | | 6.6 | 0.244 | | 0.260 |
| L9 | 3.5 | | 3.93 | 0.137 | | 0.154 |
| DIA. | 3.75 | | 3.85 | 0.147 | | 0.151 |

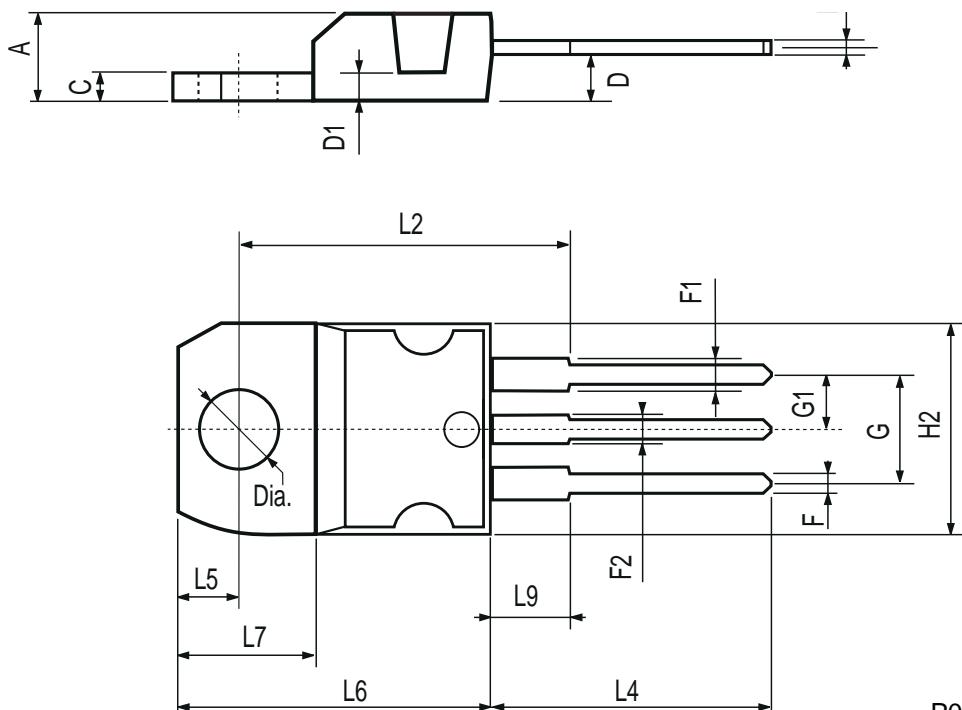

P011C

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1997 SGS-THOMSON Microelectronics - Printed in Italy - All Rights Reserved

SGS-THOMSON Microelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands -
Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A