
# **DISCRETE SEMICONDUCTORS**

# DATA SHEET



PBSS5540X 40 V, 5 A PNP low V<sub>CEsat</sub> (BISS) transistor

Product specification Supersedes data of 2004 Jan 15 2004 Nov 04





# 40 V, 5 A PNP low V<sub>CEsat</sub> (BISS) transistor

PBSS5540X

### **FEATURES**

- Low collector-emitter saturation voltage V<sub>CEsat</sub>
- $\bullet$  High collector current capability:  $I_{C}$  and  $I_{CM}$
- High efficiency leading to less heat generation.

### **APPLICATIONS**

- Supply line switching circuits
- · Battery management applications
- DC/DC converter applications
- Strobe flash units
- Medium power driver (e.g. relays, buzzers and motors).

## **DESCRIPTION**

PNP low  $V_{CEsat}$  transistor in a medium power SOT89 (SC-62) package.

NPN complement: PBSS4540X.

### **MARKING**

TYPE NUMBER	MARKING CODE <sup>(1)</sup>
PBSS5540X	*1G

### Note


- 1. \* = p: Made in Hong Kong.
  - \* = t: Made in Malaysia.
  - \* = W: Made in China.

### **QUICK REFERENCE DATA**

SYMBOL	PARAMETER	MAX.	UNIT
V <sub>CEO</sub>	collector-emitter voltage	-40	V
I <sub>C</sub>	collector current (DC)	-4	Α
I <sub>CRP</sub>	repetitive peak collector current	<b>-</b> 5	А
R <sub>CEsat</sub>	equivalent on-resistance	75	mΩ

### **PINNING**

PIN	DESCRIPTION	
1	emitter	
2	collector	
3	base	



### **ORDERING INFORMATION**

TYPE NUMBER		PACKAGE		
TTPE NOWIBER	NAME DESCRIPTION			
PBSS5540X	SC-62	plastic surface mounted package; collector pad for good heat transfer; 3 leads	SOT89	

# 40 V, 5 A PNP low $V_{CEsat}$ (BISS) transistor

PBSS5540X

### **LIMITING VALUES**

In accordance with the Absolute Maximum Rating System (IEC 60134).


SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V <sub>CBO</sub>	collector-base voltage	open emitter	_	-40	V
V <sub>CEO</sub>	collector-emitter voltage	open base	_	-40	V
V <sub>EBO</sub>	emitter-base voltage	open collector	_	-6	V
I <sub>CM</sub>	peak collector current	$t_p \le 1 \text{ ms}$	_	-10	Α
I <sub>CRP</sub>	repetitive peak collector current	$t_p \le 10 \text{ ms}; \ \delta \le 0.2$	_	-5	А
I <sub>C</sub>	collector current (DC)		_	-4	Α
I <sub>BM</sub>	peak base current	$t_p \le 1 \text{ ms}$	_	-2	А
I <sub>B</sub>	base current (DC)		_	-1	А
P <sub>tot</sub>	total power dissipation	T <sub>amb</sub> ≤ 25 °C			
		$t_p \le 10 \text{ ms}; \delta \le 0.2; \text{ note } 1$	_	2.5	W
		note 1	_	0.55	W
		note 2	_	1	W
		note 3	_	1.4	W
		note 4	_	1.6	W
T <sub>stg</sub>	storage temperature		-65	+150	°C
T <sub>j</sub>	junction temperature		_	150	°C
T <sub>amb</sub>	ambient temperature		-65	+150	°C

### **Notes**

- 1. Device mounted on a printed-circuit board, single-sided copper, tin-plated and standard footprint.
- 2. Device mounted on a printed-circuit board, single-sided copper, tin-plated and mounting pad for collector 1 cm<sup>2</sup>.
- 3. Device mounted on a printed-circuit board, single-sided copper, tin-plated and mounting pad for collector 6 cm<sup>2</sup>.
- 4. Device mounted on a 7 cm<sup>2</sup> ceramic printed-circuit board, 1 cm<sup>2</sup> single-sided copper and tin-plated.

# 40 V, 5 A PNP low $V_{CEsat}$ (BISS) transistor

PBSS5540X

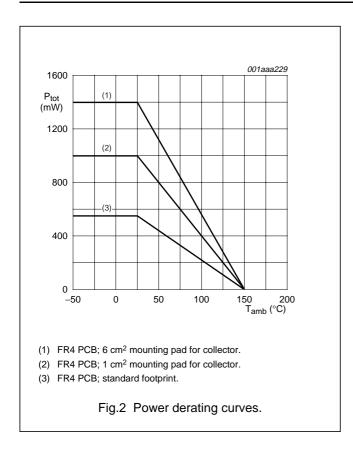

# 40 V, 5 A PNP low V<sub>CEsat</sub> (BISS) transistor


PBSS5540X

### THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
R <sub>th(j-a)</sub>	thermal resistance from junction to	in free air		
	ambient	notes 1 and 2	50	K/W
		note 2	225	K/W
		note 3	125	K/W
		note 4	90	K/W
		note 5	80	K/W
R <sub>th(j-s)</sub>	thermal resistance from junction to		16	K/W
	soldering point			

### **Notes**

- Pulse test:  $t_p \le 10$  ms;  $\delta \le 0.2$ .
- Device mounted on a printed-circuit board, single-sided copper, tin-plated and standard footprint.
- Device mounted on a printed-circuit board, single-sided copper, tin-plated and mounting pad for collector 1 cm<sup>2</sup>. 3.
- Device mounted on a printed-circuit board, single-sided copper, tin-plated and mounting pad for collector 6 cm<sup>2</sup>.
- Device mounted on a 7 cm<sup>2</sup> ceramic printed-circuit board, 1 cm<sup>2</sup> single-sided copper and tin-plated.

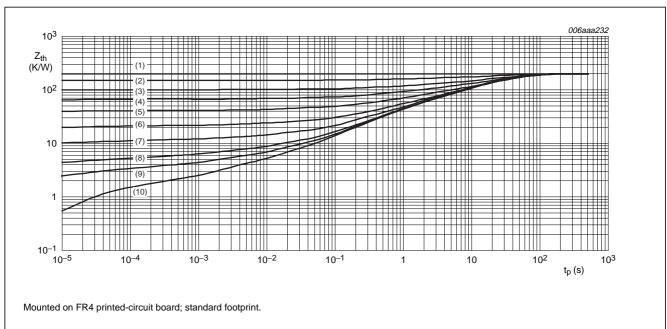

- (1)  $\delta = 1$ .
- (3)  $\delta = 0.5$ .
- (5)  $\delta = 0.2$ .
- (7)  $\delta = 0.05$ .
- (9)  $\delta = 0.01$ .


- (2)  $\delta = 0.75$ .
- (4)  $\delta = 0.33$ .
- (8)  $\delta = 0.02$ .
- (10)  $\delta = 0$ .


Fig.3 Transient thermal impedance as a function of pulse time; typical values.

2004 Nov 04 5

# 40 V, 5 A PNP low $V_{CEsat}$ (BISS) transistor

PBSS5540X

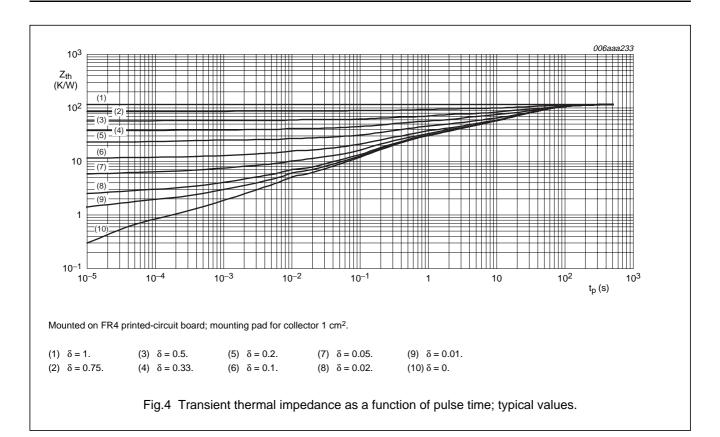

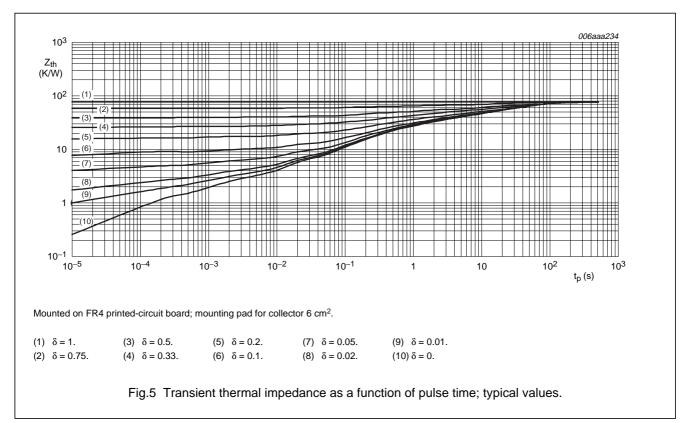

# 40 V, 5 A PNP low $V_{CEsat}$ (BISS) transistor

PBSS5540X

## **CHARACTERISTICS**

 $T_{amb}$  = 25  $^{\circ}C$  unless otherwise specified.


SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
I <sub>CBO</sub>	collector-base cut-off current	$V_{CB} = -30 \text{ V}; I_E = 0 \text{ A}$	-	_	-100	nA
		$V_{CB} = -30 \text{ V; } I_E = 0 \text{ A;}$ $T_j = 150 \text{ °C}$	_	_	-50	μА
I <sub>EBO</sub>	emitter-base cut-off current	$V_{EB} = -5 \text{ V}; I_C = 0 \text{ A}$	_	_	-100	nA
h <sub>FE</sub>	DC current gain	$V_{CE} = -2 \text{ V}; I_{C} = -0.5 \text{ A}$	250	_	_	
		$V_{CE} = -2 \text{ V}; I_{C} = -1 \text{ A};$ note 1	200	_	_	
		$V_{CE} = -2 \text{ V}; I_{C} = -2 \text{ A};$ note 1	150	_	_	
		$V_{CE} = -2 \text{ V}; I_{C} = -5 \text{ A};$ note 1	50	_	_	
V <sub>CEsat</sub>	collector-emitter saturation	$I_C = -0.5 \text{ A}; I_B = -5 \text{ mA}$	_	_	120	mV
	voltage	$I_C = -1 \text{ A}; I_B = -10 \text{ mA}$	_	_	170	mV
		$I_C = -2 \text{ A}; I_B = -200 \text{ mA}$	_	_	160	mV
		$I_C = -4 \text{ A}$ ; $I_B = -200 \text{ mA}$ ; note 1	_	_	340	mV
		$I_C = -5 \text{ A}$ ; $I_B = -500 \text{ mA}$ ; note 1	_	_	375	mV
R <sub>CEsat</sub>	equivalent on-resistance	$I_C = -5 \text{ A}; I_B = -500 \text{ mA};$ note 1	_	45	75	mΩ
V <sub>BEsat</sub>	base-emitter saturation voltage	$I_C = -4 \text{ A}$ ; $I_B = -200 \text{ mA}$ ; note 1	_	_	-1.1	V
		$I_C = -5 \text{ A}$ ; $I_B = -500 \text{ mA}$ ; note 1	_	_	-1.2	V
V <sub>BEon</sub>	base-emitter turn-on voltage	$V_{CE} = -2 \text{ V}; I_{C} = -2 \text{ A}$	_	_	-1.0	V
f <sub>T</sub>	transition frequency	$V_{CE} = -10 \text{ V; } I_{C} = -0.1 \text{ A;}$ f = 100 MHz	60	_	_	MHz
C <sub>c</sub>	collector capacitance	$V_{CB} = -10 \text{ V}; I_E = i_e = 0 \text{ A};$ f = 1 MHz	_	_	105	pF

## Note

1. Pulse test:  $t_p \le 300~\mu s;~\delta \le 0.02.$ 

# 40 V, 5 A PNP low V<sub>CEsat</sub> (BISS) transistor

# PBSS5540X



- (5)  $I_{B5} = -55 \text{ mA}.$
- (3)  $I_{B3} = -33 \text{ mA}.$

Fig.6 Collector current as a function of collector-emitter voltage; typical values.


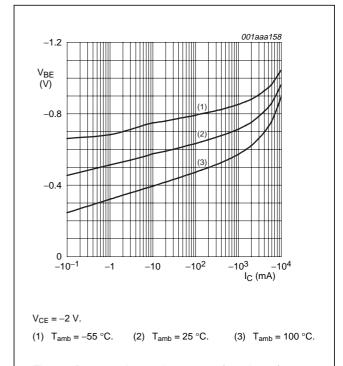



Fig.7 Base-emitter voltage as a function of collector current; typical values.



 $V_{CE} = -2 \text{ V}.$ 

- (1)  $T_{amb} = 100 \, ^{\circ}C$ .
- (2)  $T_{amb} = 25 \, ^{\circ}C$ .
- (3)  $T_{amb} = -55 \, ^{\circ}C$ .

Fig.8 DC current gain as a function of collector current; typical values.

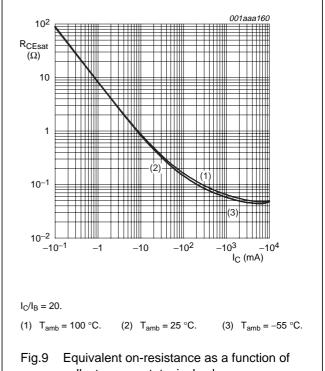

collector current; typical values.

2004 Nov 04 8

# 40 V, 5 A PNP low $V_{CEsat}$ (BISS) transistor

# PBSS5540X

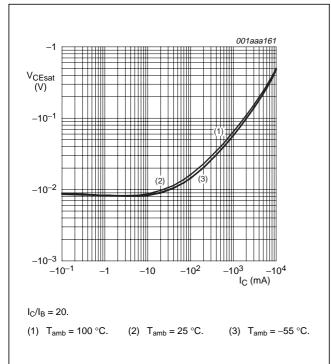


Fig.10 Collector-emitter saturation voltage as a function of collector current; typical values.

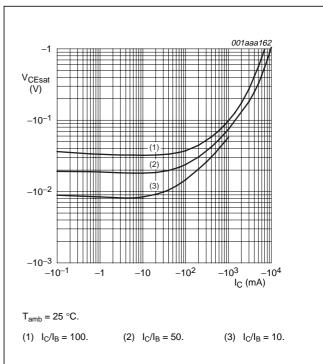


Fig.11 Collector-emitter saturation voltage as a function of collector current; typical values.


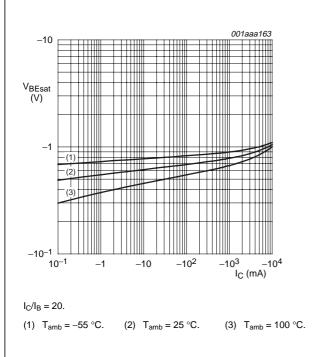



Fig.12 Base-emitter saturation voltage as a function of collector current; typical values.

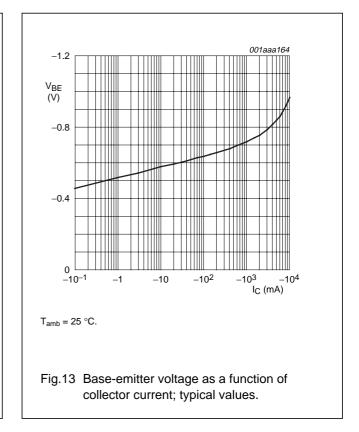



# 40 V, 5 A PNP low $V_{CEsat}$ (BISS) transistor

# PBSS5540X

# Reference mounting conditions

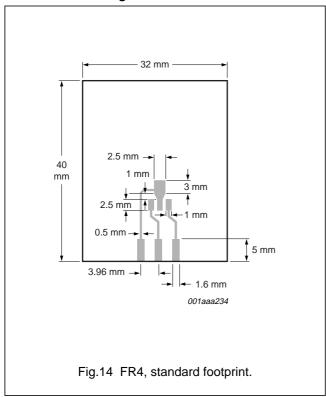

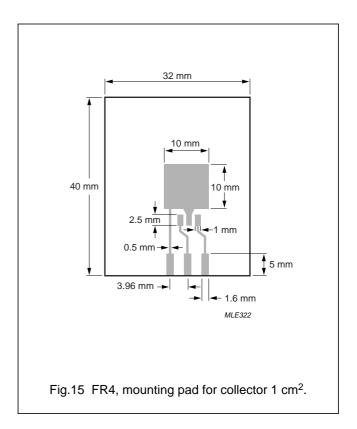

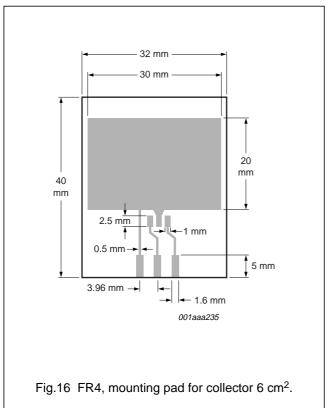


40 V, 5 A PNP low  $V_{CEsat}$  (BISS) transistor

PBSS5540X

# **PACKAGE OUTLINE**

# Plastic surface mounted package; collector pad for good heat transfer; 3 leads

SOT89

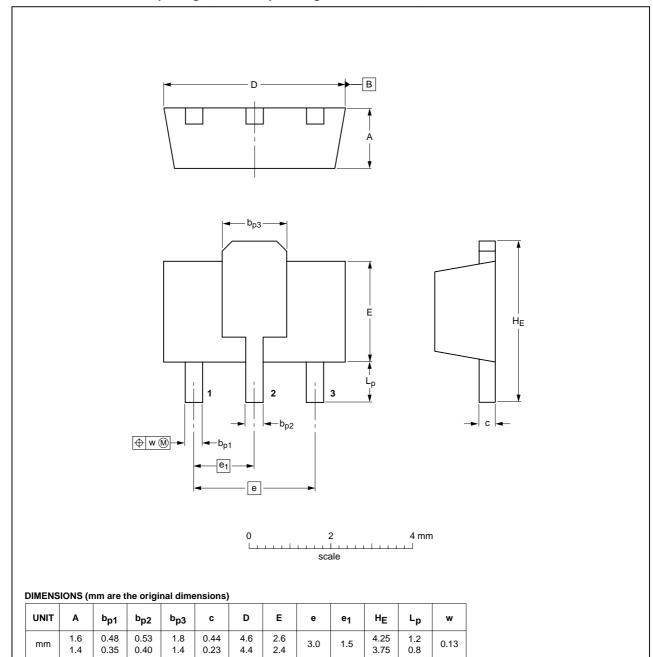

OUTLINE	REFERENCES			EUROPEAN	ISSUE DATE	
VERSION	IEC	JEDEC	JEITA		PROJECTION ISSUE DA	
SOT89		TO-243	SC-62			<del>99-09-13</del> 04-08-03

# 40 V, 5 A PNP low V<sub>CEsat</sub> (BISS) transistor

PBSS5540X

#### **DATA SHEET STATUS**

LEVEL	DATA SHEET STATUS <sup>(1)</sup>	PRODUCT STATUS(2)(3)	DEFINITION
I	Objective data	Development	This data sheet contains data from the objective specification for product development. Philips Semiconductors reserves the right to change the specification in any manner without notice.
II	Preliminary data	Qualification	This data sheet contains data from the preliminary specification. Supplementary data will be published at a later date. Philips Semiconductors reserves the right to change the specification without notice, in order to improve the design and supply the best possible product.
III	Product data	Production	This data sheet contains data from the product specification. Philips Semiconductors reserves the right to make changes at any time in order to improve the design, manufacturing and supply. Relevant changes will be communicated via a Customer Product/Process Change Notification (CPCN).

#### **Notes**

- 1. Please consult the most recently issued data sheet before initiating or completing a design.
- 2. The product status of the device(s) described in this data sheet may have changed since this data sheet was published. The latest information is available on the Internet at URL http://www.semiconductors.philips.com.
- 3. For data sheets describing multiple type numbers, the highest-level product status determines the data sheet status.

#### **DEFINITIONS**

**Short-form specification** — The data in a short-form specification is extracted from a full data sheet with the same type number and title. For detailed information see the relevant data sheet or data handbook.

Limiting values definition — Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 60134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

Application information — Applications that are described herein for any of these products are for illustrative purposes only. Philips Semiconductors make no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

#### **DISCLAIMERS**

Life support applications — These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips Semiconductors customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips Semiconductors for any damages resulting from such application.

Right to make changes — Philips Semiconductors reserves the right to make changes in the products - including circuits, standard cells, and/or software - described or contained herein in order to improve design and/or performance. When the product is in full production (status 'Production'), relevant changes will be communicated via a Customer Product/Process Change Notification (CPCN). Philips Semiconductors assumes no responsibility or liability for the use of any of these products, conveys no licence or title under any patent, copyright, or mask work right to these products, and makes no representations or warranties that these products are free from patent, copyright, or mask work right infringement, unless otherwise specified.

# Philips Semiconductors – a worldwide company

#### **Contact information**

For additional information please visit http://www.semiconductors.philips.com. Fax: +31 40 27 24825 For sales offices addresses send e-mail to: sales.addresses@www.semiconductors.philips.com.

© Koninklijke Philips Electronics N.V. 2004

SCA76

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Printed in The Netherlands

R75/03/pp13

Date of release: 2004 Nov 04

Document order number: 9397 750 13893

Let's make things better.

Philips Semiconductors



