International **ICPR** Rectifier BOSFET® Photovoltaic Relay

PD 1.025D

Series PVD33

Microelectronic Power IC Relay Single-Pole, 220mA, 0-300V DC

General Description

The Photovoltaic DC Relay (PVD) is a single-pole, normally open solid state replacement for electro-mechanical relays used for general purpose switching of analog signals. It utilizes as an output switch a unique bidirectional (AC or DC) MOSFET power IC termed a BOSFET. The BOSFET is controlled by a photovoltaic generator of novel construction, which is energized by radiation from a dielectrically isolated light emitting diode (LED).

The PVD overcomes the limitations of both conventional and reed electromechanical relays by offering the solid state advantages of long life, high operating speed, low pick-up power, bounce-free operation, low thermal voltages and miniaturization. These advantages allow product improvement and design innovations in many applications such as process control, multiplexing, telecommunications, automatic test equipment and data acquisition.

The PVD can switch analog signals from thermocouple level to 300 volts peak DC. Signal frequencies into the RF range are easily controlled and switching rates up to 6kHz are achievable. The extremely small thermally generated offset voltages allow increased measurement accuracies.


Unique silicon technology developed by International Rectifier forms the heart of the PVD. The monolithic BOSFET contains a bidirectional N-channel power MOSFET output structure. In addition, this power IC chip has input circuitry for fast turn-off and gate protection functions. This section of the BOSFET chip utilizes both bipolar and MOS technology to form NPN transistors, P-channel MOSFETs, resistors, diodes and capacitors.

The photovoltaic generator similarly utilizes a unique International Rectifier alloyed multijunction structure. The excellent current conversion efficiency of this technique results in the very fast response of the PVD microelectronic power IC relay.

This advanced semiconductor technology has created a radically new control device. Designers can now develop switching systems to new standards of electrical performance and mechanical compactness.

PVD33 Features

- BOSFET Power IC
 - 10¹⁰ Operations ■
- 100µsec Operating Time ■
- 3 milliwatts Pick-Up Power
 - 1000V/µsec dv/dt
 - Bounce-Free ■
 - 8-pin DIP Package
 - -40°C to 85°C ■
 - UL recognized



Part Identification

Part Number	Operating Voltage (DC)	Sensitivity	Off-State Resistance
PVD2352	200V		10 ⁸ Ohms
		5 mA	
PVD3354	300V		10 ¹⁰ Ohms

(BOSFET is a trademark of International Rectifier)


Series PVD33 — BOSFET® Photovoltaic Relay

Electrical Specifications (-40°C \leq T_A \leq +85°C unless otherwise specified)

INPUT CHARACTERISTICS	PVD2352	PVD3354	Units
Minimum Control Current (see figures 1 and 2)			DC
For 160mA Continuous Load Current	2.0		mA@25°C
For 200mA Continuous Load Current	5.0		mA@40°C
For 90mA Continuous Load Current	5.0		mA@85°C
Maximum Control Current for Off-State Resistance at 25°C	10		μA(DC)
Control Current Range (Caution: current limit input LED. See figure 6)	2.0 te	o 25	mA(DC)
Maximum Reverse Voltage	7.	0	V(DC)

OUTPUT CHARACTERISTICS	PVD2352	PVD3354	Units
Operating Voltage Range	200	300	V _(peak)
Maxiumum Load Current 40°C (see figures 1and 2)	220		mA(DC)
Response Time @25°C (see figures 7 and 8)			
Max. T _(on) @ 12mA Control, 50 mA Load, 100 VDC 100		μs	
Max. T(off) @ 12mA Control, 50 mA Load, 100 VDC	50		μs
Max. On-state Resistance 25°C (Pulsed) (fig. 4) 50 mA Load, 5mA Control	6		Ω
Min. Off-state Resistance 25°C (see figure 5)	10 ⁸ @ 160VDC	10 ¹⁰ @ 240VDC	Ω
Max. Thermal Offset Voltage @ 5.0mA Control	0.2		µvolts
fin. Off-State dv/dt 1000		V/µs	
Output Capacitance (see figure 9)	20		pF @ 50VDC

GENERAL CHARACTERISTICS (PVD2352 and F		Units	
Dielectric Strength: Input-Output		2500	V _{RMS}
Insulation Resistance: Input-Output @ 90V _{DC}		10 ¹² @ 25°C - 50% RH	Ω
Maximum Capacitance: Input-Output		1.0	pF
Max. Pin Soldering Temperature (1.6mm below seating plane, 10 seconds max.)		+260	
Ambient Temperature Range:	Operating	-40 to +85	°C
	Storage	-40 to +100	








Figure 2. Typical Control Current Requirements




Figure 3. Typical On Characteristics






Figure 4. Typical On-Resistance

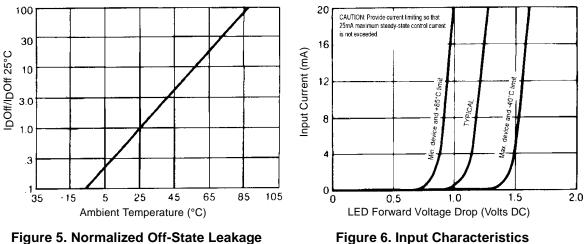

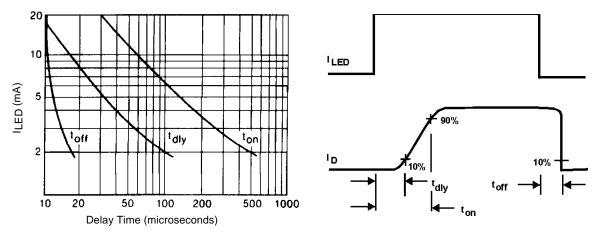

(Current Controlled)














Figure 9. Typical Output Capacitance

Wiring Diagram



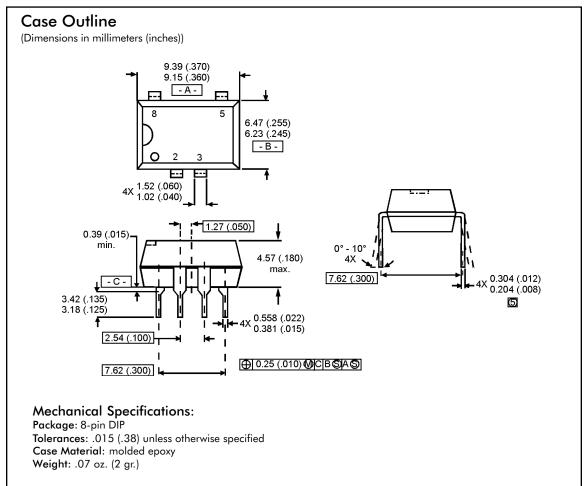

International **ICR** Rectifier

WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, Tel: (310) 322 3331 EUROPEAN HEADQUARTERS: Hurst Green, Oxted, Surrey RH8 9BB, UK Tel: ++ 44 1883 713215 IR CANADA: 7321 Victoria Park Ave., Suite 201, Markham, Ontario L3R 2Z8, Tel: (905) 475 1897 IR GERMANY: Saalburgstrasse 157, 61350 Bad Homburg Tel: ++ 49 6172 96590 IR ITALY: Via Liguria 49, 10071 Borgaro, Torino Tel: ++ 39 11 451 0111 IR FAR EAST: K&H Bldg., 2F, 3-30-4 Nishi-Ikeburo 3-Chome, Toshima-Ku, Tokyo, Japan 171 Tel: ++ 81 3 3983 0641 IR SOUTHEAST ASIA: 315 Outram Road, #10-02 Tan Boon Liat Building, Singapore 0316 Tel: ++ 65 221 8371 http://www/irf.com/ Data and specifications subject to change without notice. 9/96