

VDZ11B

Voltage regulation

- 1) Ultra small mold type (VMD2).
- 2) High reliability.
- 3) By chip-mounter, automatic mounting is possible.

Silicon Epitaxial Planer

Technical drawing of the VMD2 component showing front and side views with dimensions:

- Front View Dimensions:**
 - Top width: 0.6 ± 0.05
 - Bottom width: 0.27 ± 0.03
 - Height of the main body: 1.0 ± 0.05
 - Total height: 1.4 ± 0.05
- Side View Dimensions:**
 - Top width: 0.13 ± 0.03
 - Bottom width: 0.5 ± 0.05

ROHM : VMD2
 () dot (year week factory) EX. VDZ3.6B

VMD2

Technical drawing of a mechanical part, likely a shaft or tube, showing dimensions and tolerances. The drawing includes a side view and a cross-sectional view.

Dimensions and Tolerances:

- Overall length: 8.0 ± 0.3
- Overall diameter: $\phi 1.5 \pm 0.1$
- Section 1 length: 4 ± 0.1
- Section 2 length: 2 ± 0.05
- Section 3 length: 4 ± 0.1
- Section 4 length: 2 ± 0.05
- Section 5 length: 0.76 ± 0.1
- Section 6 length: 0.65 ± 0.05
- Section 7 length: 0.3
- Section 8 length: 0.18 ± 0.05
- Section 9 length: 0.1
- Section 10 length: 0.4
- Section 11 length: 1.75 ± 0.1
- Section 12 length: 3.5 ± 0.05
- Section 13 length: 21 ± 0.1
- Section 14 length: 1.1 ± 0.05
- Section 15 length: 0.5
- Section 16 length: 0.5
- Section 17 length: 0.5
- Section 18 length: 0.5
- Section 19 length: 0.5
- Section 20 length: 0.5
- Section 21 length: 0.5
- Section 22 length: 0.5
- Section 23 length: 0.5
- Section 24 length: 0.5
- Section 25 length: 0.5
- Section 26 length: 0.5
- Section 27 length: 0.5
- Section 28 length: 0.5
- Section 29 length: 0.5
- Section 30 length: 0.5
- Section 31 length: 0.5
- Section 32 length: 0.5
- Section 33 length: 0.5
- Section 34 length: 0.5
- Section 35 length: 0.5
- Section 36 length: 0.5
- Section 37 length: 0.5
- Section 38 length: 0.5
- Section 39 length: 0.5
- Section 40 length: 0.5
- Section 41 length: 0.5
- Section 42 length: 0.5
- Section 43 length: 0.5
- Section 44 length: 0.5
- Section 45 length: 0.5
- Section 46 length: 0.5
- Section 47 length: 0.5
- Section 48 length: 0.5
- Section 49 length: 0.5
- Section 50 length: 0.5
- Section 51 length: 0.5
- Section 52 length: 0.5
- Section 53 length: 0.5
- Section 54 length: 0.5
- Section 55 length: 0.5
- Section 56 length: 0.5
- Section 57 length: 0.5
- Section 58 length: 0.5
- Section 59 length: 0.5
- Section 60 length: 0.5
- Section 61 length: 0.5
- Section 62 length: 0.5
- Section 63 length: 0.5
- Section 64 length: 0.5
- Section 65 length: 0.5
- Section 66 length: 0.5
- Section 67 length: 0.5
- Section 68 length: 0.5
- Section 69 length: 0.5
- Section 70 length: 0.5
- Section 71 length: 0.5
- Section 72 length: 0.5
- Section 73 length: 0.5
- Section 74 length: 0.5
- Section 75 length: 0.5
- Section 76 length: 0.5
- Section 77 length: 0.5
- Section 78 length: 0.5
- Section 79 length: 0.5
- Section 80 length: 0.5
- Section 81 length: 0.5
- Section 82 length: 0.5
- Section 83 length: 0.5
- Section 84 length: 0.5
- Section 85 length: 0.5
- Section 86 length: 0.5
- Section 87 length: 0.5
- Section 88 length: 0.5
- Section 89 length: 0.5
- Section 90 length: 0.5
- Section 91 length: 0.5
- Section 92 length: 0.5
- Section 93 length: 0.5
- Section 94 length: 0.5
- Section 95 length: 0.5
- Section 96 length: 0.5
- Section 97 length: 0.5
- Section 98 length: 0.5
- Section 99 length: 0.5
- Section 100 length: 0.5

Parameter	Symbol	Limits	Unit
Power dissipation	P	100	mW
Junction temperature	T _j	150	°C
Storage temperature	T _{stg}	-55 to +150	°C
Operating temperature	T _{opr}	-55 to +150	°C

Diodes






●Electrical characteristics (Ta=25°C)








TYP.	Symbol								
	Zener voltage : Vz(V)			Operating resistance : Zz(Ω)		Rising operating resistance : Zz(Ω)		Reverse current : IR(μA)	
	MIN.	MAX.	Iz(mA)	MAX.	Iz(mA)	MAX.	Iz(mA)	MAX.	VR(V)
VDZ 3.6B	3.600	3.845	5.0	100	5.0	1000.0	1.0	10.0	1.0
VDZ 3.9B	3.890	4.160	5.0	100	5.0	1000.0	1.0	5.0	1.0
VDZ 4.3B	4.170	4.430	5.0	100	5.0	1000.0	1.0	5.0	1.0
VDZ 4.7B	4.550	4.750	5.0	100	5.0	800.0	0.5	2.0	1.0
VDZ 5.1B	4.980	5.200	5.0	80	5.0	500.0	0.5	2.0	1.5
VDZ 5.6B	5.490	5.730	5.0	60	5.0	200.0	0.5	1.0	2.5
VDZ 6.2B	6.060	6.330	5.0	60	5.0	100.0	0.5	1.0	3.0
VDZ 6.8B	6.650	6.930	5.0	40	5.0	60.0	0.5	0.5	3.5
VDZ 7.5B	7.280	7.600	5.0	30	5.0	60.0	0.5	0.5	4.0
VDZ 8.2B	8.020	8.360	5.0	30	5.0	60.0	0.5	0.5	5.0
VDZ 9.1B	8.850	9.230	5.0	30	5.0	60.0	0.5	0.5	6.0
VDZ 10B	9.770	10.210	5.0	30	5.0	60.0	0.5	0.1	7.0
VDZ 11B	10.760	11.220	5.0	30	5.0	60.0	0.5	0.1	8.0
VDZ 12B	11.740	12.240	5.0	30	5.0	80.0	0.5	0.1	9.0
VDZ 13B	12.910	13.490	5.0	37	5.0	80.0	0.5	0.1	10.0
VDZ 15B	14.340	14.980	5.0	42	5.0	80.0	0.5	0.1	11.0
VDZ 16B	15.850	16.510	5.0	50	5.0	80.0	0.5	0.1	12.0
VDZ 18B	17.560	18.350	2.0	65	2.0	80.0	0.5	0.1	13.0
VDZ 20B	19.520	20.390	2.0	85	2.0	100.0	0.5	0.1	15.0
VDZ 22B	21.540	22.470	2.0	100	2.0	100.0	0.5	0.1	17.0
VDZ 24B	23.720	24.780	2.0	120	2.0	120.0	0.5	0.1	19.0
VDZ 27B	26.190	27.530	2.0	150	2.0	150.0	0.5	0.1	21.0
VDZ 30B	29.190	30.690	2.0	200	2.0	200.0	0.5	0.1	23.0
VDZ 33B	32.150	33.790	2.0	250	2.0	250.0	0.5	0.1	25.0
VDZ 36B	35.070	36.870	2.0	300	2.0	300.0	0.5	0.1	27.0

●Type No.

TYPE	TYPE NO.	TYPE	TYPE NO.
VDZ 3.6B	62	VDZ 12B	25
VDZ 3.9B	72	VDZ 13B	35
VDZ 4.3B	82	VDZ 15B	45
VDZ 4.7B	92	VDZ 16B	55
VDZ 5.1B	A2	VDZ 18B	65
VDZ 5.6B	C2	VDZ 20B	75
VDZ 6.2B	E2	VDZ 22B	85
VDZ 6.8B	F2	VDZ 24B	95
VDZ 7.5B	H2	VDZ 27B	A5
VDZ 8.2B	J2	VDZ 30B	C5
VDZ 9.1B	L2	VDZ 33B	E5
VDZ 10B	05	VDZ 36B	F5
VDZ 11B	15		

Diodes

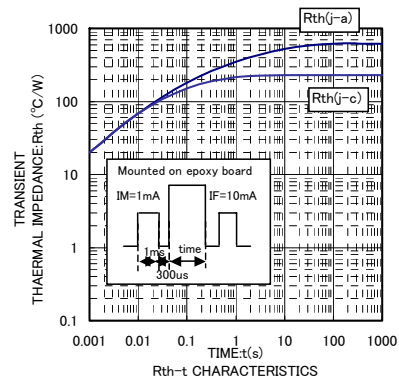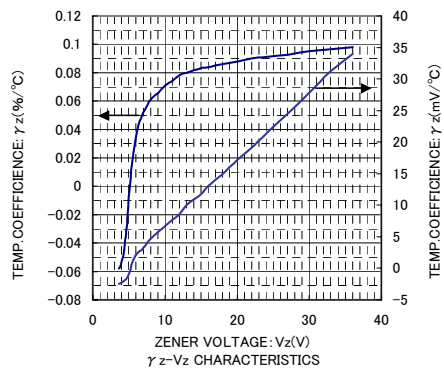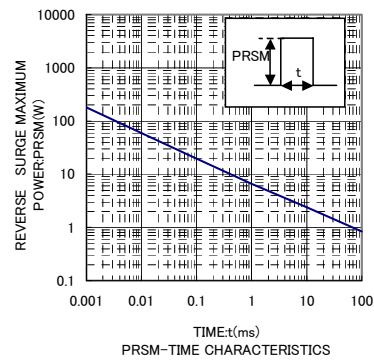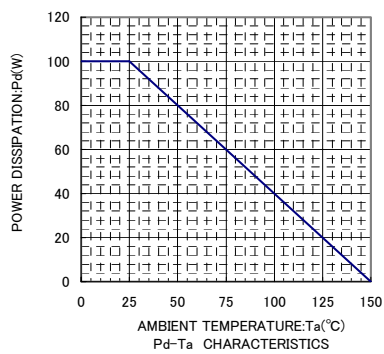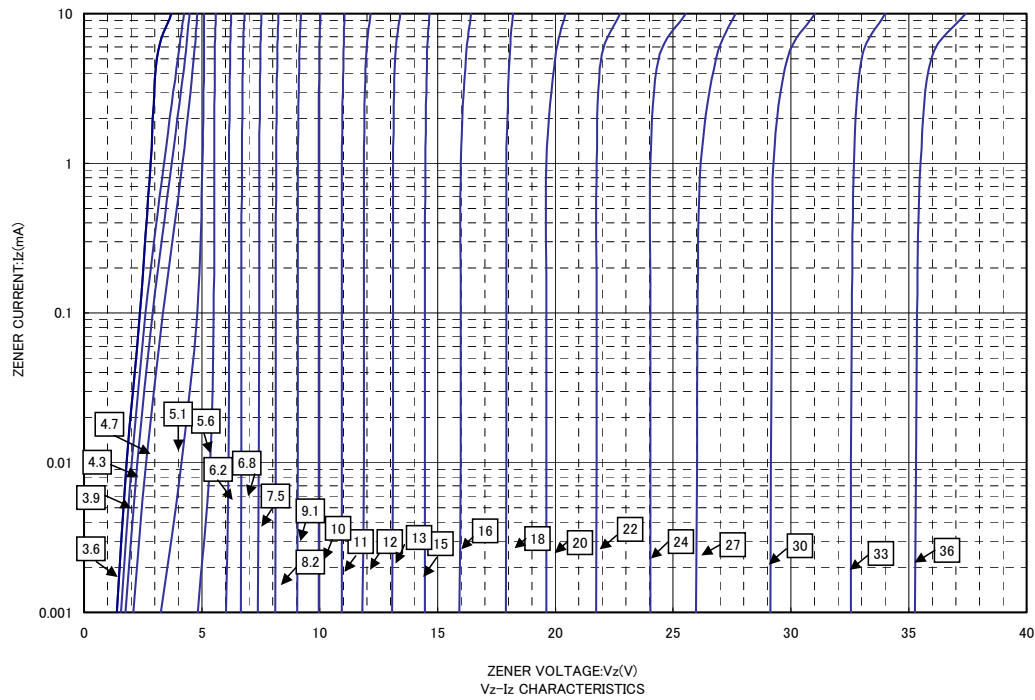

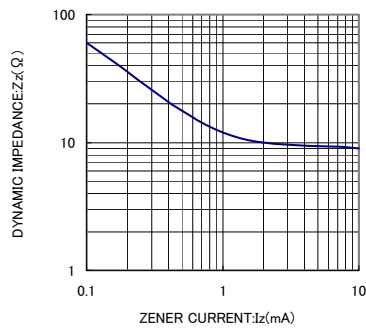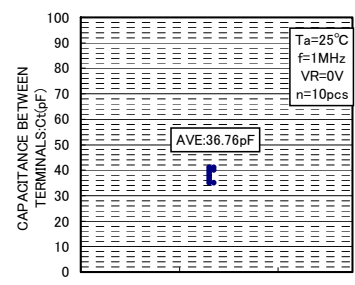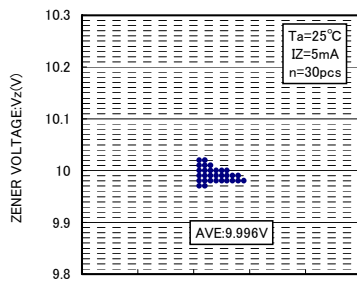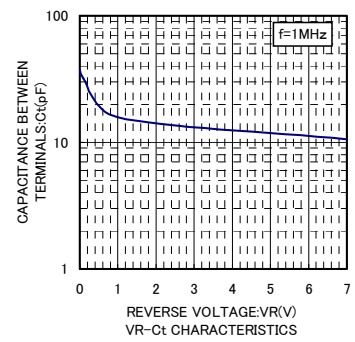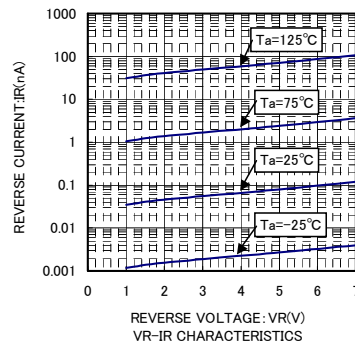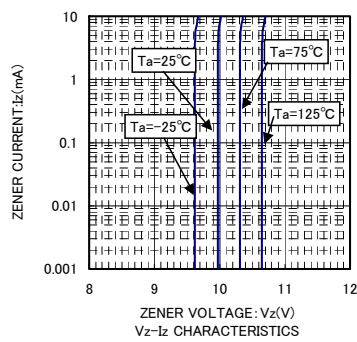

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.