


Strip Block for Snap-in Mounting with 4 IEC Appliance Outlets F and space for extra component



Snap-In Version



Description

- Panel Mount:
Snap-in version from front side
- 3 Functions:
Module of 4 outlets, with additional carrier frame for accessory modules, Pin temperature 70 °C, Protection class I
- Solder terminals or quick connect terminals

Approvals

- CSA License Number: 56242

Characteristics

- Insulation cover on the rear-side
- Qualified for use in equipment according IEC/EN 60950

Other versions on request

- For protection class II

References

[General Product Information](#)

Weblinks

[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [Mating Connectors](#), [e-Store](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)


Technical Data

Ratings IEC	10A / 250VAC; 50Hz
Ratings UL/CSA	15A / 250VAC; 60Hz
Dielectric Strength	> 2 kVAC between L-N > 2 kVAC between L/N-PE (1 min/50 Hz)
Allowable Operation Temp.	-25 °C to 70 °C
Degree of Protection	from front side IP 30 acc. to IEC 60529
Protection Class	Suitable for appliances with protection class 1 acc. to IEC 61140
Terminal	Solder terminals or quick connect terminals
Panel Thickness s	Snap-in 1/ 1.2/ 1.5/ 2/ 2.5/ 3 mm tolerance +0.0/-0.1
Material: Housing	Thermoplastic, black, UL 94V-0

Appliance Outlet	F acc. to IEC/EN 60320-2-2, UL 498 CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 10A, Protection Class 1
------------------	---

Dimensions

Cut-out for 2 mm
Snap-in Inlet

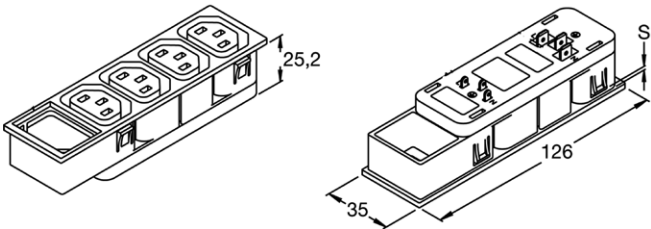

Panel cut-out
122.1 x 32.5 mm
Max. corner radius 1 mm

Variants

[Distributor-Stock-Check](#) | [SCHURTER-Stock-Check](#) | [e-Store](#)

Panel Thickness s [mm]	Terminal	Length [mm]	Order Number
1	Quick connect terminals 6.3 x 0.8 mm	126	4754.3200
1.2	Quick connect terminals 6.3 x 0.8 mm	126	4754.8200
1.5	Quick connect terminals 6.3 x 0.8 mm	126	4754.4200
2	Quick connect terminals 6.3 x 0.8 mm	126	4754.5200
2.5	Quick connect terminals 6.3 x 0.8 mm	126	4754.6200
3	Quick connect terminals 6.3 x 0.8 mm	126	4754.7200
1	Solder terminals 4 x 0.8 mm	126	4754.3400
1.2	Solder terminals 4 x 0.8 mm	126	4754.8400
1.5	Solder terminals 4 x 0.8 mm	126	4754.4400
2	Solder terminals 4 x 0.8 mm	126	4754.5400
2.5	Solder terminals 4 x 0.8 mm	126	4754.6400
3	Solder terminals 4 x 0.8 mm	126	4754.7400
1	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	126	4754.3000
1.2	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	126	4754.8000
1.5	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	126	4754.4000
2	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	126	4754.5000
2.5	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	126	4754.6000
3	Solder terminals 4 x 0.8 mm and quick connect terminals 6.3 x 0.8 mm	126	4754.7000

Please note, all quadblocs are available in protection-class II upon request.
Cord retaining clamp see accessories

Packaging unit 40 Pcs

Accessories

Description

[Cord retaining kits](#)

Cord retaining strain relief



Flat head, Z	0888.0021
Flat head, E	4700.0005
Flat head, G	4700.0007
Flat head, H	4700.0008

Mating Inlets/Plugs

Category / Description

[Interconnection Cord Overview complete](#)

Interconnection Cord with IEC Plug E, Angled	0607
Interconnection Cord with IEC Plug E, Angled	0608
Interconnection Cord with IEC Plug E, Straight	0609
Interconnection Cord with IEC Plug G, Angled	607B
Interconnection Cord with IEC Plug G, Angled	608B

[Interconnection Cord further types to 4754](#)

...

[Plug Overview complete](#)

IEC Plug E, Cord Connector (Rewireable), Straight, max. cable Diameter 8.5 mm	4732
IEC Plug E, Cord Connector (Rewireable), Angled, max. Cable Diameter 10 mm	4733
IEC Plug E, Cord Connector (Rewireable), Straight, max. Cable Diameter 10 mm	4735
IEC Plug E, Cord Connector (Rewireable), Angled, max. Cable Diameter 10 mm	4736
IEC Plug E, Cord Connector (Rewireable), Straight	9009

[Plug further types to 4754](#)

...