

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0039000297

Status:

Active

Overview:

standard_093

Description:

2.36mm (.093") Diameter, Standard .093" Pin and Socket Crimp Terminal, Series 1190, Male, with Tin (Sn) over Copper Plated Brass Contact, 14-20 AWG, Bag

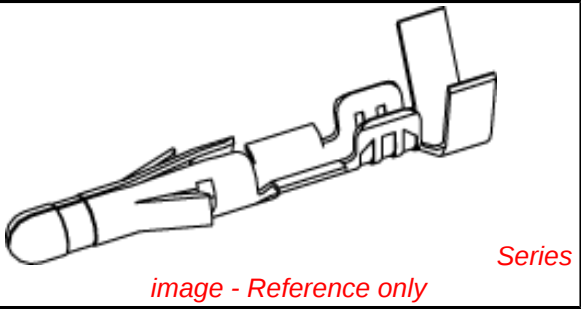


image - Reference onlySeries

Documents:

Drawing (PDF)

Product Specification PS-1190-005 (PDF)

RoHS Certificate of Compliance (PDF)

General	
Product Family	Crimp Terminals
Series	1190
Crimp Quality Equipment	Yes
Overview	standard_093
Product Name	Standard .093"
Physical	
Gender	Male
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Packaging Type	Bag
Plating min: Mating (µin)	35
Plating min: Mating (µm)	0.88
Plating min: Termination (µin)	35
Plating min: Termination (µm)	0.88
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	1.60-4.10mm (.063-.161")
Wire Size AWG	14, 16, 18, 20
Wire Size mm²	N/A
Material Info	
Old Part Number	1190TL
Reference - Drawing Numbers	
Product Specification	PS-1190-005, RPS-1190-001
Sales Drawing	SD-1190-001

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Halogen-Free

China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

1190Series

Use With

3191p

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global




Description	Product #
Hand Crimp Tool	0638191100
Extraction Tool	0011030006

Japan


Description	Product #
Hand Crimp Tool	0011260006
JHTR1031C	
Applicator for M211A	0011260069
Bench Press, 14-28 AWG, for 8980-6C, 8980-6C1, 1189, 1190, 1380, 1381,	

This document was generated on 05/19/2010


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

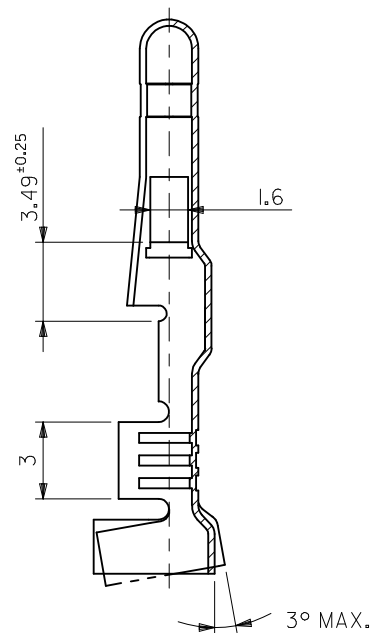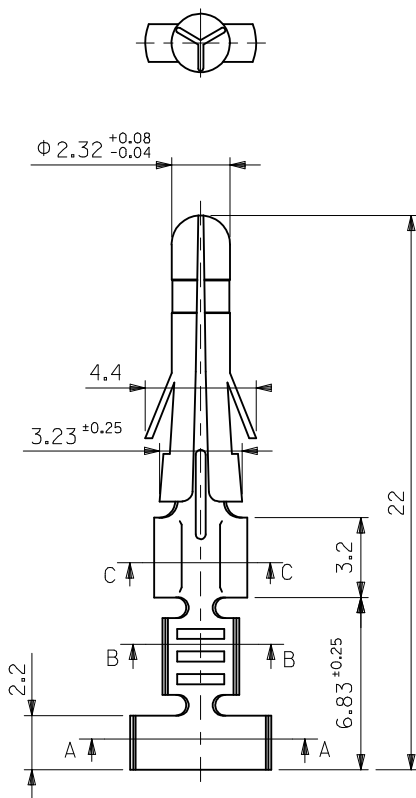

SECT. A-A



SECT. B-B



SECT. C-C

ニッケル (2 μm MIN.) 下地 金 (0.35 μm MIN.) OVER NICKEL (2 μm MIN.)	39-00-0300	1190G	連鎖状端子 CHAIN
銅 (0.5 μm MIN.) 下地 錫 (0.9 μm MIN.) OVER TIN (0.9 μm MIN.) OVER COPPER (0.5 μm MIN.)	39-00-0297	1190TL	バラ端子 LOOSE
メッキ PLATING	EDP.NO.	ENG.NO.	形状 FORM

REVISED EC NO: J2009-1285 DRWN: YOSHIDAM CHKD: THARUYAWA APPR: NUKITA	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 5:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	± ---	DRAWN BY H. HASEGAWA	DATE '93/06/18	TITLE .093 DIA. MALE TERM.				
		10 OVER 30 UNDER	± ---	CHECKED BY H. HIRAMOTO	DATE '93/06/18					
		30 OVER	± ---	APPROVED BY M. FUKUSHIMA	DATE '93/06/18	MOLEX INCORPORATED				
		ANGULAR	± --- °	MATERIAL NO.						
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-1190-001			1 OF 1		
	REV			SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					