

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-,-



COPYRIGHT

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD



B

REVISED (ECR-08-024310)



04NOV08

B.W



S.C

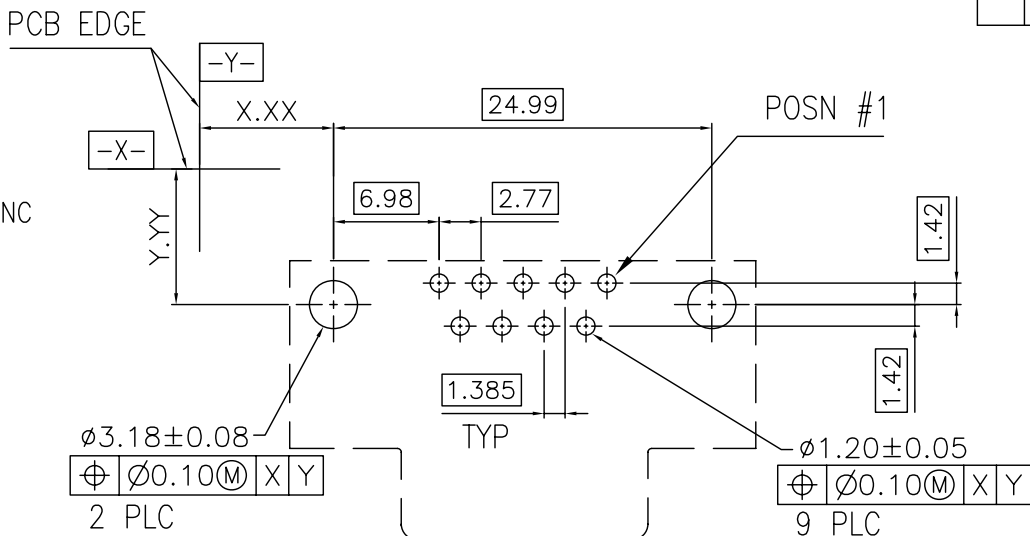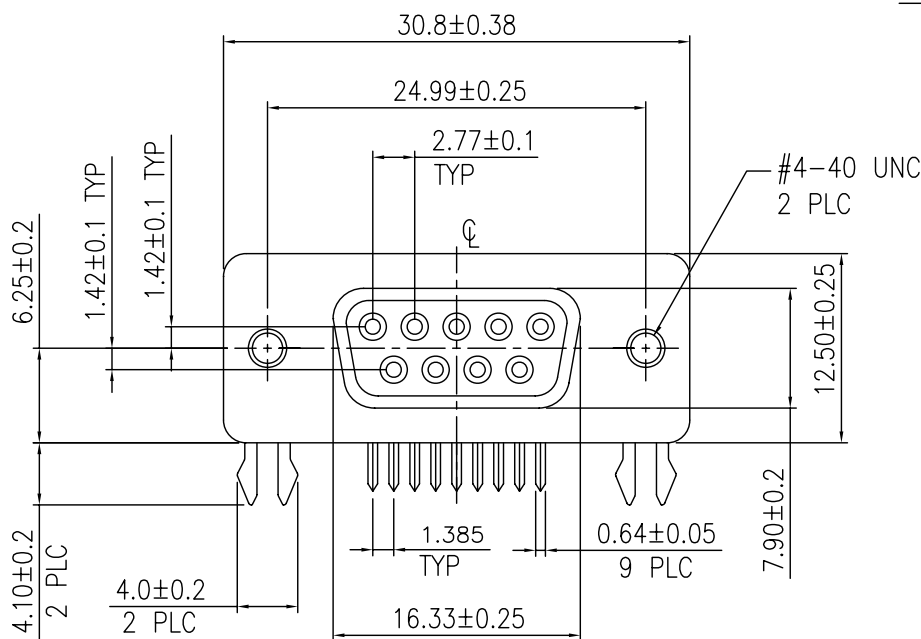

RECOMMENDED PCB LAYOUT
PCB TOLERANCE ±0.05

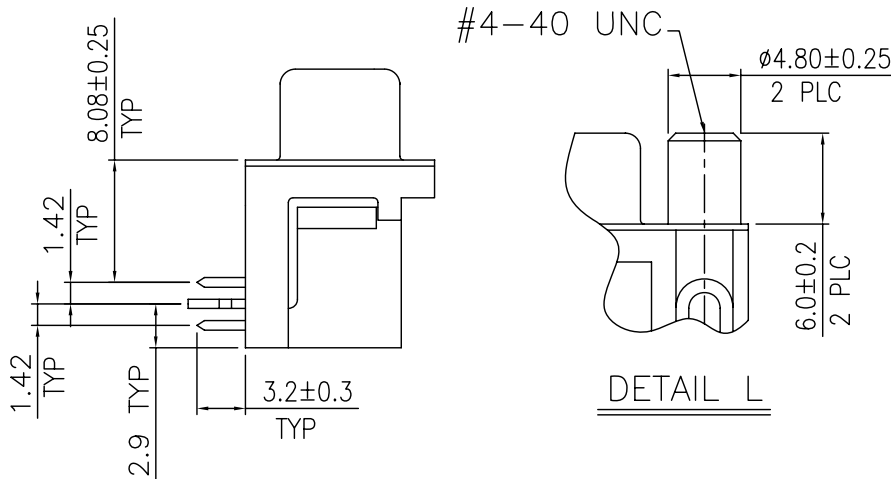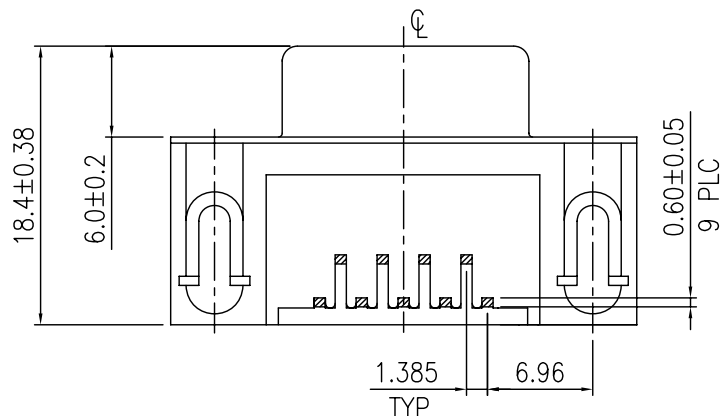

DETAIL L

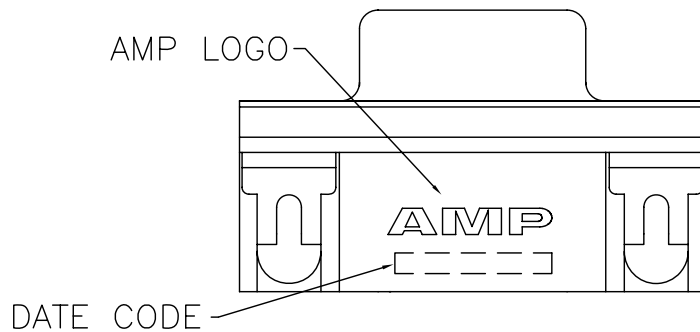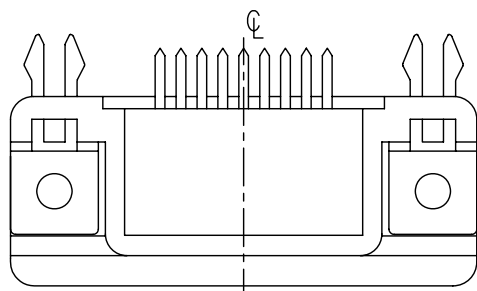

NOTES:

- MATERIAL:
 - HOUSING: THERMOPLASTIC, UL 94V-0 RATED, BLACK
 - CONTACTS: PHOSPHOR BRONZE
 - SHELL: SPCC
 - BOARDLOCKS: BRASS
 - RIVET: COPPER ALLOY
- FINISH:
 - CONTACT:
 - GOLD PLATING ON CONTACT AREA
 - 2.54um[100u"] MIN. MATTE TIN PLATING ON SOLDER TAIL AREA
 - 1.27um[50u"] MIN. NICKEL UNDERPLATING OVERALL
 - BOARDLOCK:
 - 2.54um[100u"] MIN. MATTE TIN PLATING
 - 1.27um[50u"] MIN. NICKEL UNDERPLATING OVERALL
 - SHELL: NICKEL PLATED
 - RIVET: NICKEL PLATING OVERALL
- RECOMMENDED PCB THICKNESS: 1.6 mm
- WAVE SOLDER CAPABLE TO 265°C
PER TE SPEC. 109-202, CONDITION B.
- THE SCREW TORQUE FORCE APPLIED: 7.0 Kgf-cm MAX.
- NET WEIGHT: 7.03 gram/pc OR 11.0 gram/pc(WITH SCREW)

(SEE DETAIL L)

OBSOLETE	W/	15u"	1-1734348-2
	W/O	15u"	1734348-2
	W/O	G/F	1734348-1
SCREW	GOLD PLATING	AMP PART NO.	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN J. LEE 11JUL2007

CHK S. HOU 11JUL2007

APVD W.J. KE 11JUL2007

PRODUCT SPEC

108-57541

QUALIFICATION TEST REPORT


501-57613

WEIGHT SEE NOTES

CUSTOMER DRAWING

DIMENSIONS:

MM



TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± 0.38
2 PLC ± 0.25
3 PLC ± 0.15
4 PLC ± -
ANGLES ± -

MATERIAL

SEE NOTE

FINISH

SEE NOTE



Tyco Electronics Corporation
Taipei, Taiwan

NAME

RECEPTACLE ASSEMBLY,
9 POSN, RIGHT ANGLE,
8.08mm[0.318in] SERIES, AMPLIMITE

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779 C=1734348

SCALE

SHEET

1 OF 2

REV

B

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-,-



COPYRIGHT

-

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1.

D

D

C



C

B

B

A

A

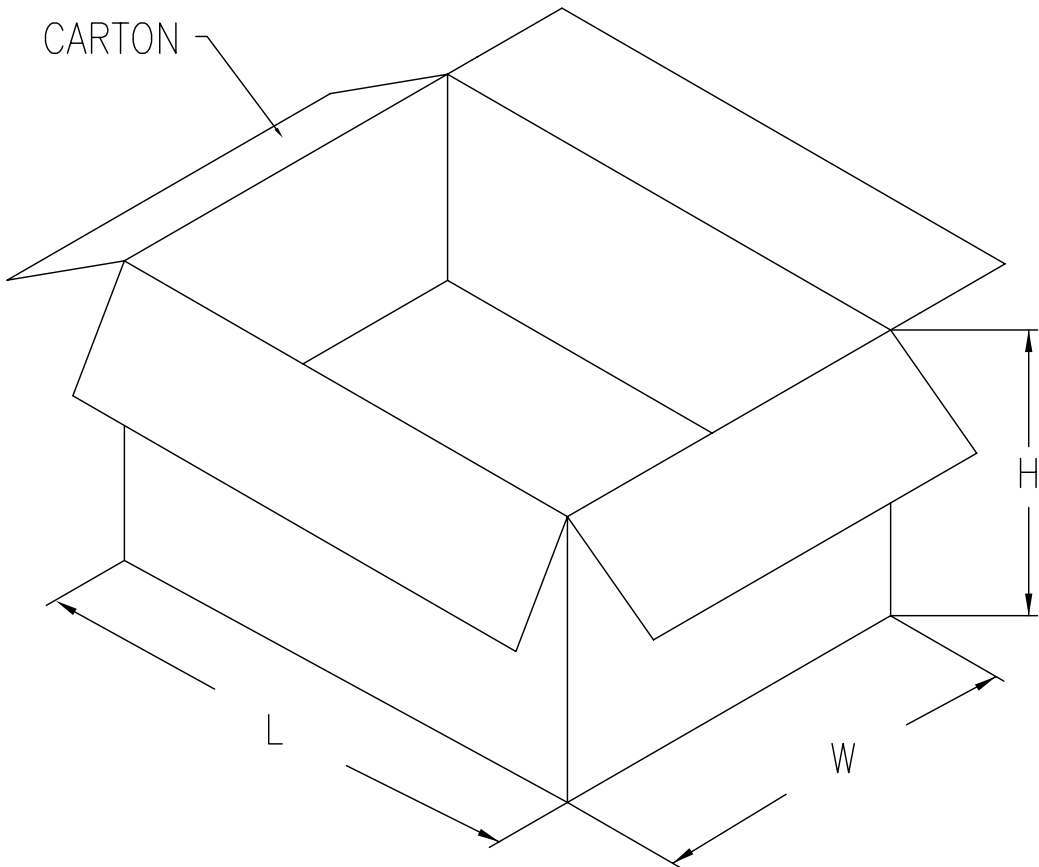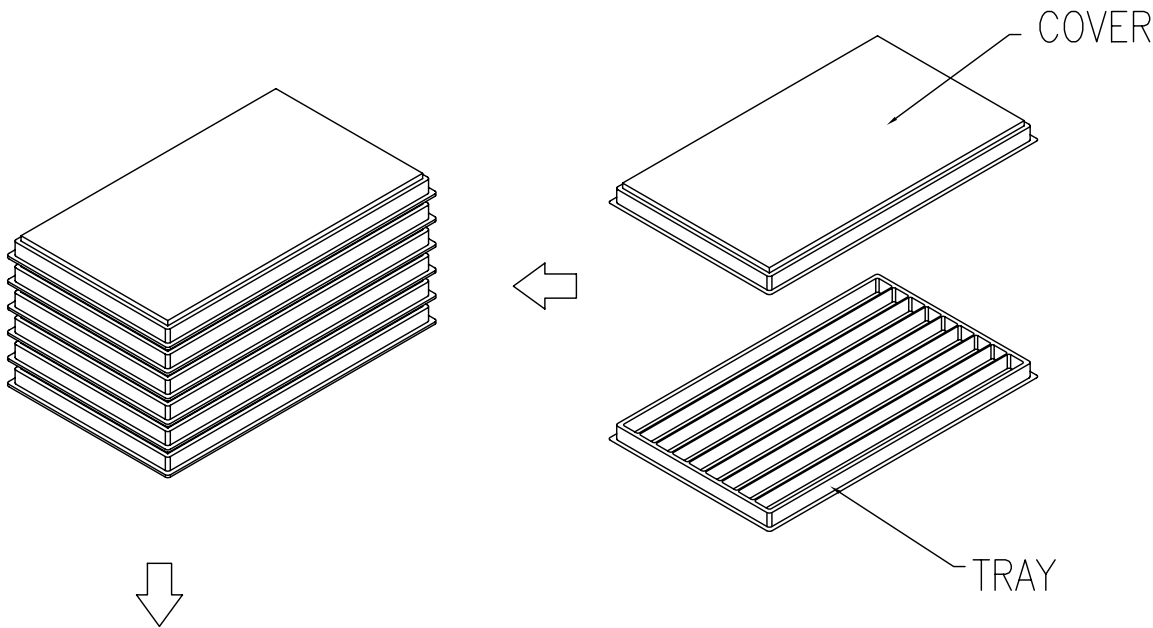

NOTES:

1. MATERIAL:

1.1 TRAY: PVC

1.2 SHIPPING CARTON: CORRUGATED FIBERBOARD

2. DIMENSION:

2.1 TRAY: L=340, W=228, H=15

2.2 SHIPPING CARTON: L=440, W=321, H=153

3. QUANTITY:


3.1 PRIMARY PACKING: 90 PCS/TRAY

3.2 SECONDARY PACKING: 11 TRAY/CARTON (990PCS)

4. SHIPPING CARTON WEIGHT:

4.1 NET WEIGHT: 6.962 Kg OR 10.8 Kg(WITH SCREWS)

4.2 GROSS WEIGHT: 7.962 Kg OR 11.8 Kg(WITH SCREWS)

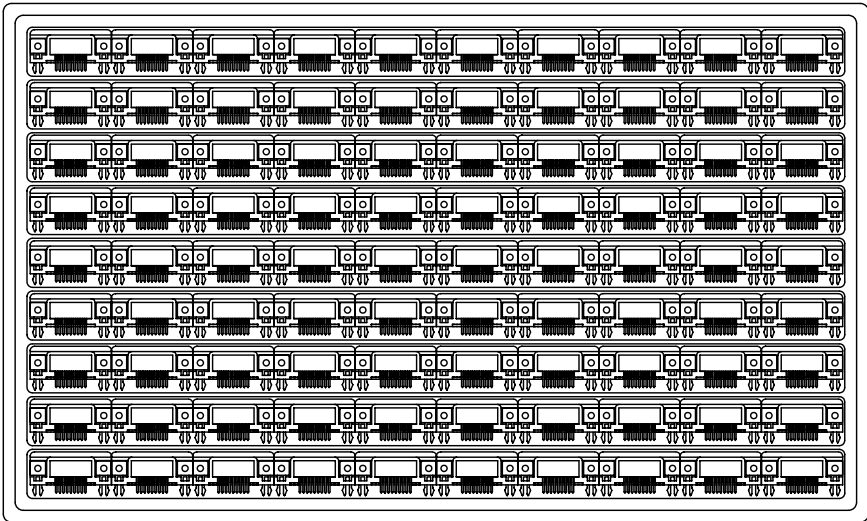

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

CHK

APVD


PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

DIMENSIONS:
MM



MATERIAL

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -
FINISH



Tyco Electronics

Tyco Electronics Corporation
Taipei, Taiwan

NAME

RECEPTACLE ASSEMBLY,
9 POSN, RIGHT ANGLE,
8.08mm[0.318in] SERIES, AMPLIMITE

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C=1734348

SCALE

SHEET

2 OF 2

REV

B