


SAW Bandpass Filter 272003B



1. Features

- IF Bandpass Filter
- High Attenuation
- Single-Ended Operation
- DIP Package
- Maximum Storage Temperature Range : -40℃ ~ 85℃
- Electrostatics Sensitive Device (ESD)

2. Package Dimension

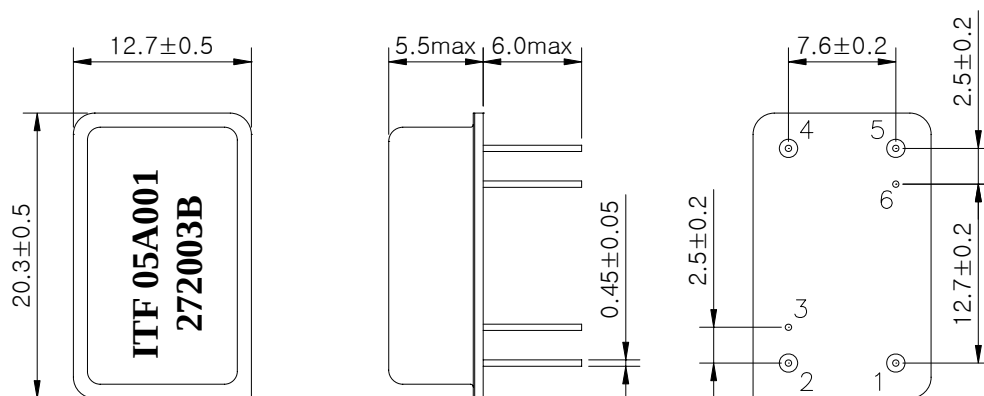

Package : 2012

Dimensions shown are nominal in millimeters

Base : Fe(SPCC), Au plating over Ni plated

Cap : Cu & Cr Alloy, Ni Plated

Termination : Kovar, Au Plated

Pin Configuration	
1	Input
5	Output
2, 4	Ground
3, 6	Case ground

 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	272003B	
		Rev. Date	2005-03-27	
		Rev.	NM5005-CS02	1/5

SAW Bandpass Filter 272003B



3. Specifications

Fo = 70.0 MHz

Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

		Minimum	Typical	Maximum
Center Frequency	MHz	69.94	70.0	70.06
Insertion Loss	dB	-	23.5	25.0
1dB Bandwidth	MHz	-	20.15	-
3dB Bandwidth	MHz	20.3	20.45	-
40dB Bandwidth	MHz	-	21.78	21.85
Amplitude Ripple (Fo +/- 9.75 MHz)	dB	-	0.6	1.0
Group Delay Variation (Fo +/- 9.75 MHz)	nsec	-	50	100
Absolute Delay	usec	-	2.37	-
Ultimate Rejection	dB	50	55	-
Temperature Coefficient of Frequency	ppm/°C	-	-72	-

Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature

All attenuation measurements are measured relative to insertion loss


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	272003B	
		Rev. Date	2005-03-27	
		Rev.	NM5005-CS02	2/5

SAW Bandpass Filter 272003B



4. Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

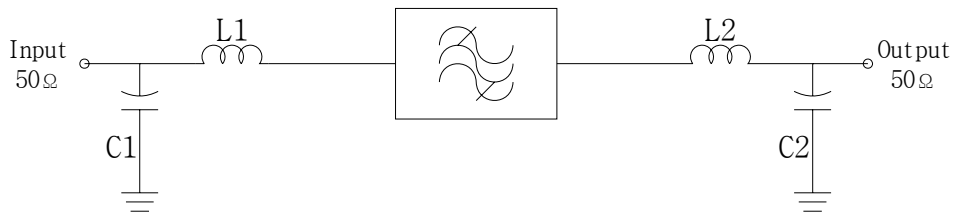

L1 = 150 nH , L2 = 180 nH

C1 = 15pF, C2 = 16pF

5. Marking Configuration

ITF¹⁾05A001²⁾

272003B³⁾

● ⁴⁾

1) Manufacturer name

2) Lot Number

3) Part Number



4) Pad Number 1 Index

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	272003B	
		Rev. Date	2005-03-27	
		Rev.	NM5005-CS02	3/5

SAW Bandpass Filter 272003B







6. Typical Performance (at +25℃)

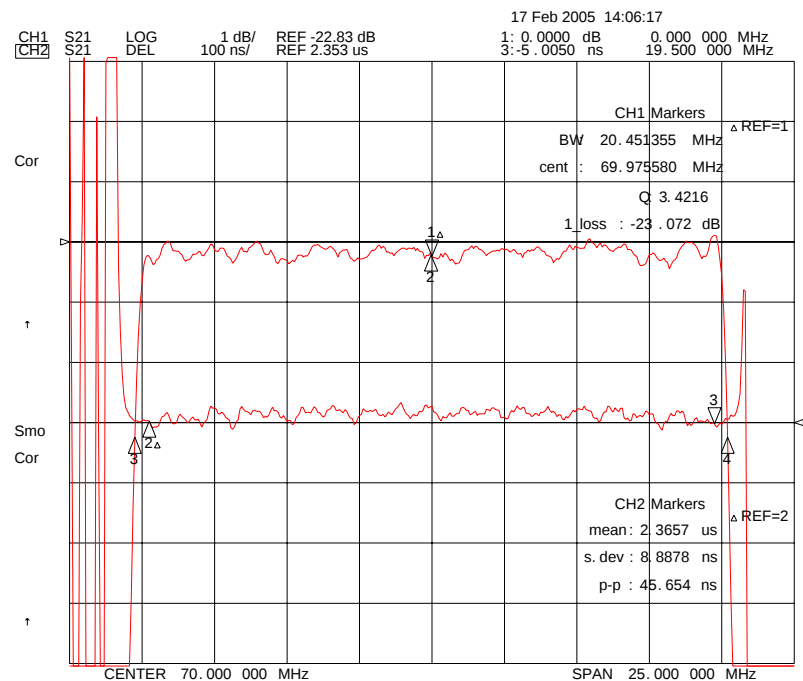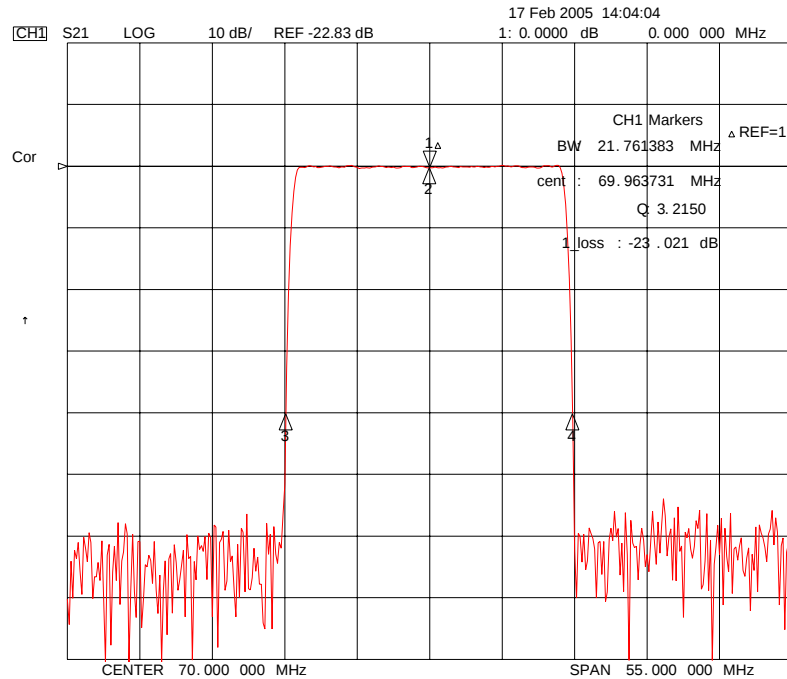

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809		Part No. 272003B	
			Rev. Date 2005-03-27	
			Rev. NM5005-CS02	4/5

SAW Bandpass Filter 272003B

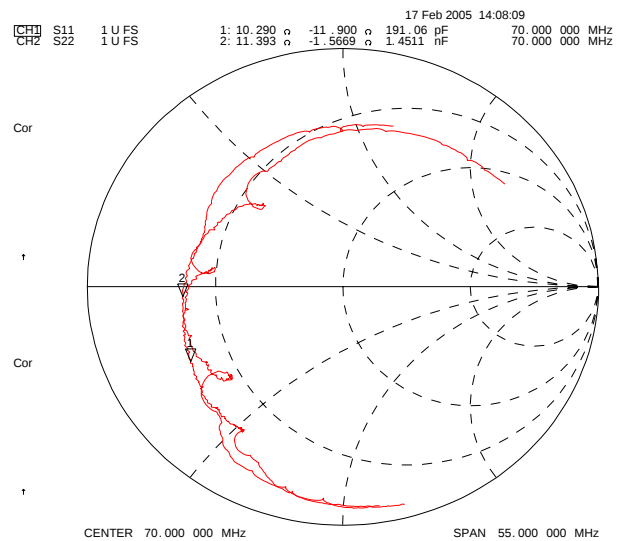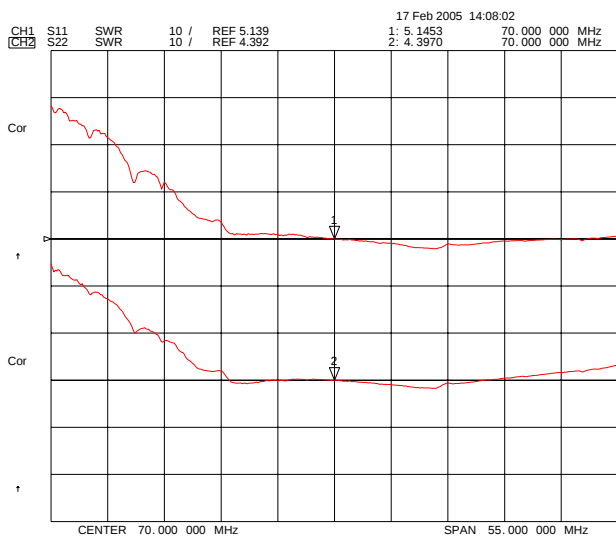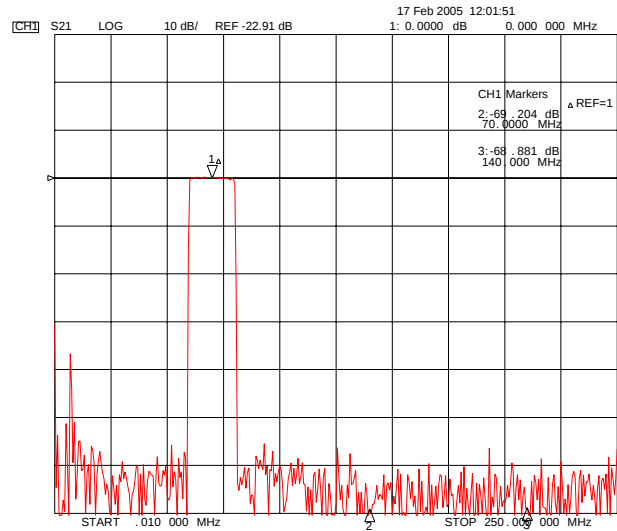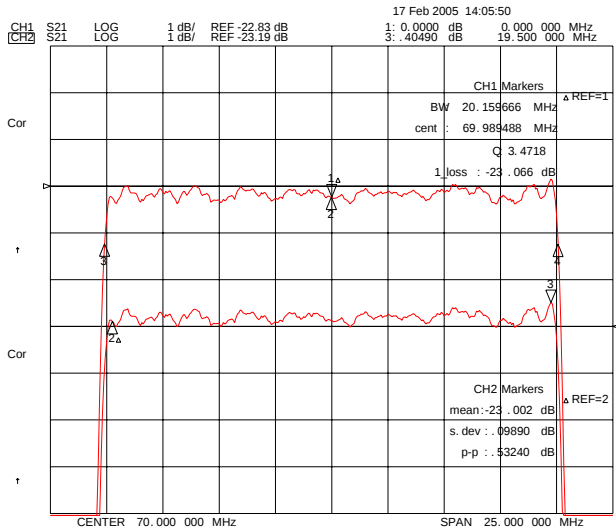

ITF Co., Ltd.
102-901, Bucheon Technopark 364,
Samjeong-Dong, Ojeong-Gu, Bucheon-City,
Gyeonggi-Do, Korea 421-809

Part No. 272003B

Rev. Date 2005-03-27

Rev. NM5005-CS02 5/5