


MP15,25,35 CT SERIES

15/25/35 AMPS.
SILICON BRIDGE RECTIFIERS


CHENG-YI
ELECTRONIC



FEATURES

- Rating to 1000V PRV
- 400 Amperes surge capability
- High efficiency
- Weight:0.7 ounce 20 grams
- For maximum heat dissipation
- Mounting: thru hole for #8 screw
- Case:Molded plastic isolated with heatsink internally
- Electrically Isolated base 1800 Volt

VOLTAGE RANGE
50 TO 1000 VOLTS PRV
CURRENT
15.25.35. Amperes

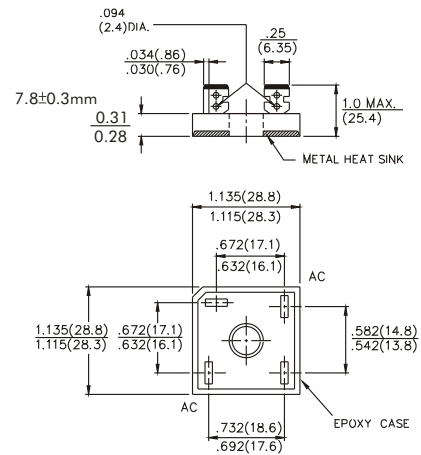

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

MP 15/25/35		MP005	MP01	MP02	MP04	MP06	MP08	MP10	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Bridge Input Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Output Current @ $T_C=55^\circ C$	$V_{(AV)}$	15 25 35							A
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC Mehtod)	I_{FSM}	250 300 400							A
Maximum Forward Voltage per Bridge element	V_F	MP15 7.5A MP25 at IF 12.5A MP35 17.5A 1.1							V
Maximum DC Reverse Current at Rated DC	I_R	5 200							μA
Blocking Voltage per Bridge element									μA
$I^2 t$ Rating for fusing ($t < 8.3ms$)	$I^2 t$	374/664							A ² S
Typical Thermal Resistance(Note.1)	$R \theta_{JC}$	2.0							°C/W
Operating Temperature Range	T_J	-55 to +125							°C
Storage Temperature Range	T_{STG}	-55 to +150							°C

NOTE: 1.Mounted on a 11.8in²X 0.06 in thick (300mm² X 1.5mm thick) Copper plate.
2.Fast Recovery, Controlled avalanche bridges are available. Please consult with factory.

MP15,25,35 CT SERIES

15/25/35 AMPS.
SILICON BRIDGE RECTIFIERS



CHENG-YI
ELECTRONIC

RATING AND CHARACTERISTICS CURVES MP15,25,35CT SERIES

Fig. 1 - FORWARD DERATING CURVE

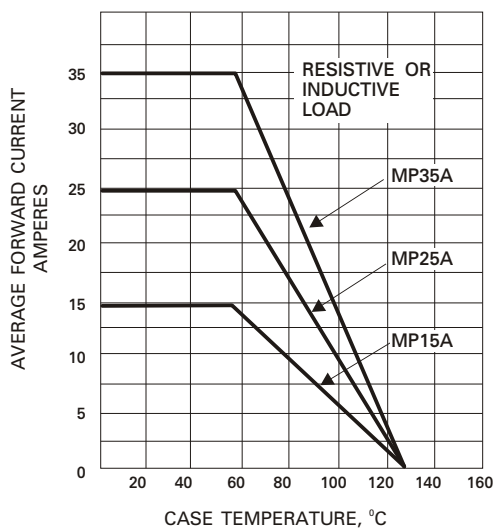


Fig. 2 - PAKF FORWARD SURGE CURRENT

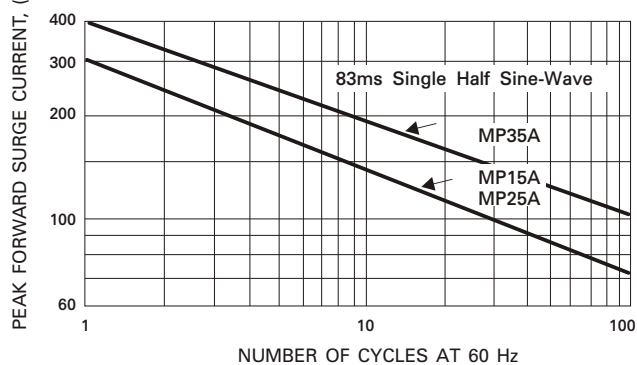


Fig. 3 - TYPICAL FORWARD CHARACTERISTICS

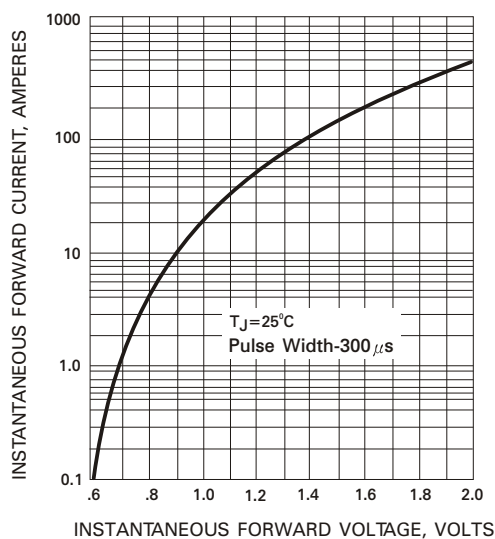


Fig. 4 - TYPICAL REVERSE CHARACTERISTICS

