

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0452800601](#)
Status: **Active**
Overview: [microfit_30](#)
Description: 3.00mm (.118") Pitch Micro-Fit 3.0 BMI CPI™ Compliant Pin Header, Blind Mate Interface, Dual Row, Vertical, 6 Circuits, PA Polyamide Nylon 4/6, UL 94V-0, Tin (Sn) Over Nickel (Ni) Plating

Documents:

3D Model	Product Specification PS-44300-001 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification


CSA	LR19980
TUV	R72081037
UL	E29179

General

Product Family	PCB Headers
Series	45280
Application	Board-to-Board, Wire-to-Board
Application Tooling Part Link	622008400
Overview	microfit_30
Product Literature Order No	USA-106
Product Name	Micro-Fit 3.0 BMI CPI™

Physical

Breakaway	No
Circuits (Loaded)	6
Circuits (maximum)	6
Color - Resin	Black
Durability (mating cycles max)	30
Flammability	94V-0
Glow-Wire Compliant	No
Guide to Mating Part	Yes
Lock to Mating Part	None
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Number of Rows	2
Orientation	Vertical
PC Tail Length (in)	0.189 In
PC Tail Length (mm)	4.80 mm
PCB Locator	Yes
PCB Retention	Yes
Packaging Type	Tray
Pitch - Mating Interface (in)	0.118 In
Pitch - Mating Interface (mm)	3.00 mm
Plating min: Mating (µin)	200
Plating min: Mating (µm)	5
Plating min: Termination (µin)	200
Plating min: Termination (µm)	5
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Fully
Stackable	No



Series

image - Reference only

EU RoHS

**ELV and RoHS
Compliant**
**REACH SVHC
Contains SVHC: No
Halogen-Free
Status**

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)


Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series
[45280Series](#)

Mates With
[44133-0600](#) Panel Mount Receptacle,
[44764-0601](#) Right Angle Receptacle
Header, [44769-0601](#) Vertical Receptacle
Header

Application Tooling | FAQ
*Tooling specifications and manuals are
found by selecting the products below.
Crimp Height Specifications are then
contained in the Application Tooling
Specification document.*

Global	
Description	Product #
Micro-Fit™ Compliant Pin Insertion Flat Rock Tool	0622008400

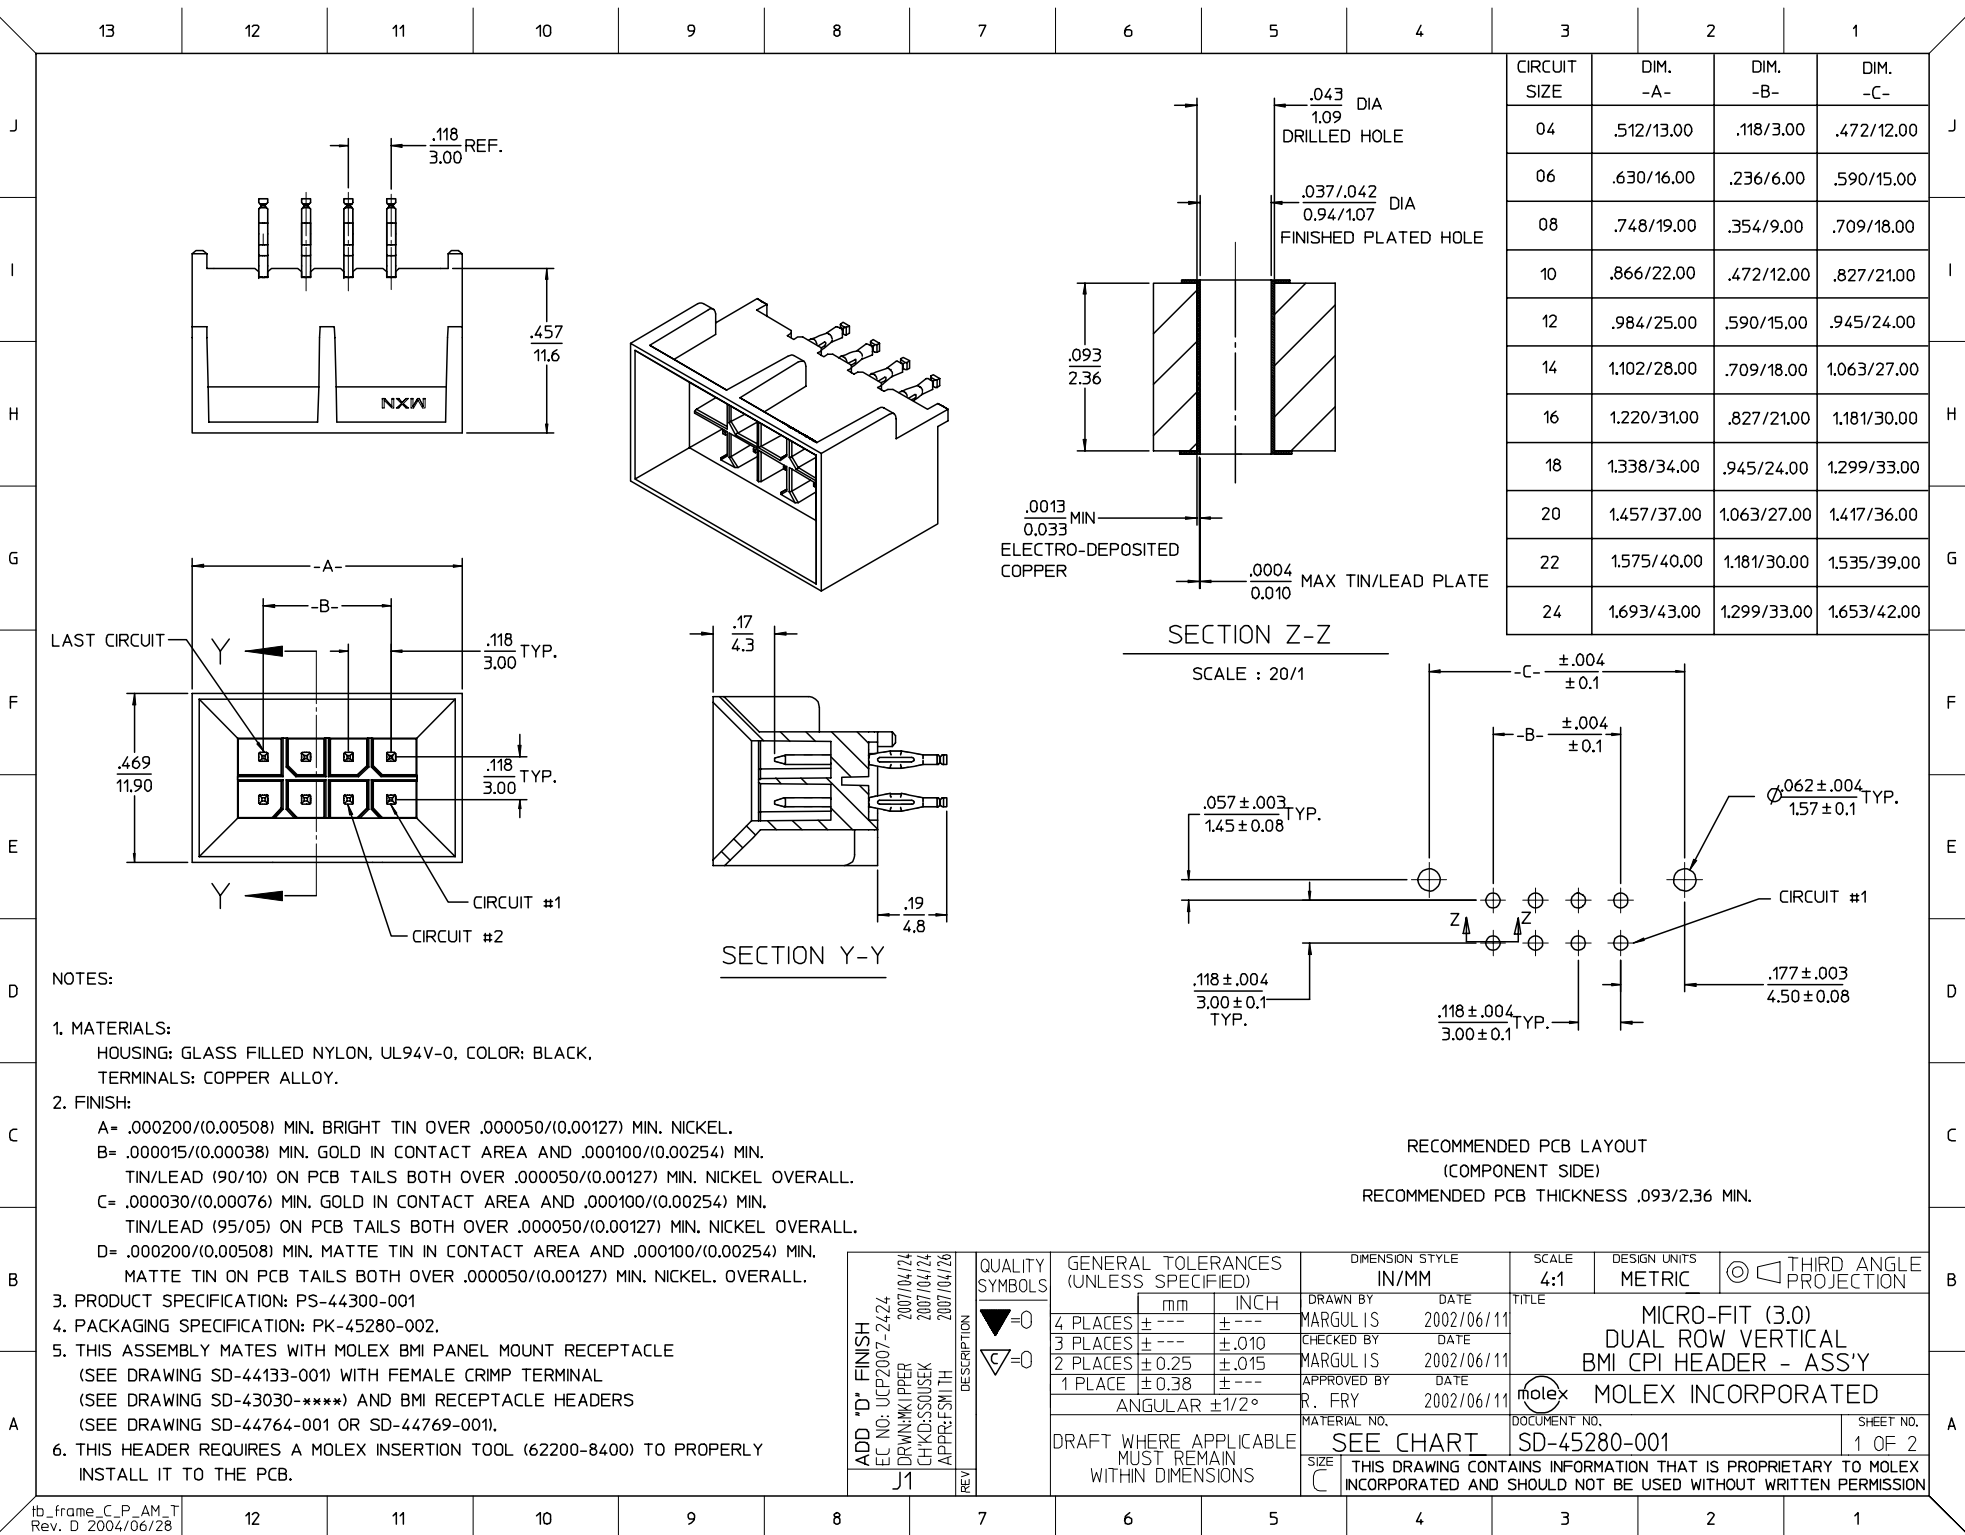

CIRCUIT SIZE	DIM. -A-	DIM. -B-	DIM. -C-
04	.512/13.00	.118/3.00	.472/12.00
06	.630/16.00	.236/6.00	.590/15.00
08	.748/19.00	.354/9.00	.709/18.00
10	.866/22.00	.472/12.00	.827/21.00
12	.984/25.00	.590/15.00	.945/24.00
14	1.102/28.00	.709/18.00	1.063/27.00
16	1.220/31.00	.827/21.00	1.181/30.00
18	1.338/34.00	.945/24.00	1.299/33.00
20	1.457/37.00	1.063/27.00	1.417/36.00
22	1.575/40.00	1.181/30.00	1.535/39.00
24	1.693/43.00	1.299/33.00	1.653/42.00

SECTION Z-Z

SCALE : 20/1

SECTION Y-Y

RECOMMENDED PCB LAYOUT
(COMPONENT SIDE)

RECOMMENDED PCB THICKNESS .093/2.36 MIN.

NOTES:

1. MATERIALS:

HOUSING: GLASS FILLED NYLON, UL94V-0, COLOR: BLACK,
TERMINALS: COPPER ALLOY.

2. FINISH:

- A= .000200/(0.00508) MIN. BRIGHT TIN OVER .000050/(0.00127) MIN. NICKEL.
B= .000015/(0.00038) MIN. GOLD IN CONTACT AREA AND .000100/(0.00254) MIN.
TIN/LEAD (90/10) ON PCB TAILS BOTH OVER .000050/(0.00127) MIN. NICKEL OVERALL.
C= .000030/(0.00076) MIN. GOLD IN CONTACT AREA AND .000100/(0.00254) MIN.
TIN/LEAD (95/05) ON PCB TAILS BOTH OVER .000050/(0.00127) MIN. NICKEL OVERALL.
D= .000200/(0.00508) MIN. MATTE TIN IN CONTACT AREA AND .000100/(0.00254) MIN.
MATTE TIN ON PCB TAILS BOTH OVER .000050/(0.00127) MIN. NICKEL. OVERALL.

3. PRODUCT SPECIFICATION: PS-44300-001

4. PACKAGING SPECIFICATION: PK-45280-002.

5. THIS ASSEMBLY MATES WITH MOLEX BMI PANEL MOUNT RECEPTACLE

(SEE DRAWING SD-44133-001) WITH FEMALE CRIMP TERMINAL

(SEE DRAWING SD-43030-****) AND BMI RECEPTACLE HEADERS

(SEE DRAWING SD-44764-001 OR SD-44769-001).

6. THIS HEADER REQUIRES A MOLEX INSERTION TOOL (62200-8400) TO PROPERLY
INSTALL IT TO THE PCB.

ADD "D" FINISH EC NO: UCP2007-2424 DRAWN: KIPPER 2007/04/24 CHKD: SMOUSEK 2007/04/24 APPR: FSI TH 2007/04/26 REV: J1	QUALITY SYMBOLS =0 =0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± .010 2 PLACES ± .025 ± .015 1 PLACE ± .038 ± --- ANGULAR ±1/2°	DIMENSION STYLE IN/MM DRAWN BY DATE MARGUL IS 2002/06/11 CHECKED BY DATE MARGUL IS 2002/06/11 APPROVED BY DATE R. FRY 2002/06/11 MATERIAL NO. DOCUMENT NO. SD-45280-001	SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	TITLE MICRO-FIT (3.0) DUAL ROW VERTICAL BMI CPI HEADER - ASS'Y MOLEX INCORPORATED	SHEET NO. 1 OF 2

	13	12	11	10	9	8	7	6	5	4	3	2	1	
J	MATERIAL NUMBER	CIRCUIT SIZE	PLATING OPTION	ADD "D" FINISH EC NO.: UCP2007-2424 DRWN:HK1/PPER 2007/04/24 CHKD:SSOUSEK 2007/04/24 APPR:FSM1/TH 2007/04/26 REV J1 DESCRIPTION QUALITY SYMBOLS ▽=0 ▽=0 GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± .010 2 PLACES ± 0.25 ± .015 1 PLACE ± 0.38 ± --- ANGULAR ±1/2° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS DIMENSION STYLE IN/MM DRAWN BY DATE MARGUL IS 2002/06/11 CHECKED BY DATE MARGUL IS 2002/06/11 APPROVED BY DATE R. FRY 2002/06/11 MATERIAL NO. SEE CHART DOCUMENT NO. SD-45280-001 SHEET NO. 2 OF 2 SCALE 4:1 DESIGN UNITS METRIC THIRD ANGLE PROJECTION microFIT MICRO-FIT (3.0) DUAL ROW VERTICAL BMI CPI HEADER - ASS'Y molex MOLEX INCORPORATED THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										
	452800401	04	A											
	452800402	04	B											
	452800403	04	C											
	452800404	04	D											
I	452800601	06	A											
	452800602	06	B											
	452800603	06	C											
	452800604	06	D											
	452800801	08	A											
H	452800802	08	B											
	452800803	08	C											
	452800804	08	D											
	452801001	10	A											
G	452801002	10	B											
	452801003	10	C											
	452801004	10	D											
	452801201	12	A											
	452801202	12	B											
F	452801203	12	C											
	452801204	12	D											
	452801401	14	A											
	452801402	14	B											
	452801403	14	C											
E	452801404	14	D											
	452801601	16	A											
	452801602	16	B											
	452801603	16	C											
	452801604	16	D											
D	452801801	18	A											
	452801802	18	B											
	452801803	18	C											
	452801804	18	D											
	452802001	20	A											
C	452802002	20	B											
	452802003	20	C											
	452802004	20	D											
	452802201	22	A											
B	452802202	22	B											
	452802203	22	C											
	452802204	22	D											
	452802401	24	A											
	452802402	24	B											
A	452802403	24	C											
	452802404	24	D											
	12	11	10	9	8	7	6	5	4	3	2	1		