


SAW Bandpass Filter 202539B



1. Features

- IF Bandpass Filter
- High Attenuation
- Single-Ended Operation
- DIP Package
- Maximum Storage Temperature Range : -40℃ ~ 85℃
- Electrostatics Sensitive Device (ESD)

2. Package Dimension

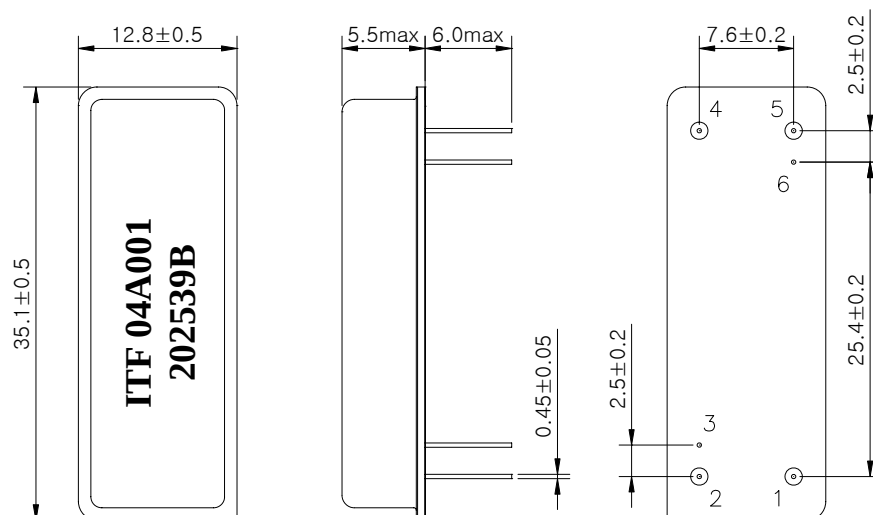

Package : D3512

Dimensions shown are nominal in millimeters

Base : Fe(SPCC), Au plating over Ni plated

Cap : Cu & Cr Alloy, Ni Plated

Termination : Kovar, Au Plated

Pin Configuration	
1	Input
5	Output
2, 4	Ground
3, 6	Case ground

 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	202539B	
		Rev. Date	2004-04-28	
		Rev.	NI1001-CS01	1/5

SAW Bandpass Filter 202539B



3. Specifications

Fo = 160.0 MHz

Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

		Minimum	Typical	Maximum
Center Frequency	MHz	159.88	160.0	160.12
Insertion Loss	dB	-	27.5	28.5
1dB Bandwidth	MHz	-	9.15	-
3dB Bandwidth	MHz	9.40	9.45	-
40dB Bandwidth	MHz	-	10.47	10.5
Amplitude Ripple (Fo +/- 4.375 MHz)	dB	-	1.0	1.2
Group Delay Variation (Fo +/- 4.375 MHz)	nsec	-	60	150
Absolute Delay	usec	-	3.46	-
Temperature Coefficient of Frequency	ppm/°C	-	-23	-

Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature
- 3) All attenuation measurements are measured relative to insertion loss


 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	202539B	
		Rev. Date	2004-04-28	
		Rev.	NI1001-CS01	2/5

SAW Bandpass Filter 202539B



4. Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

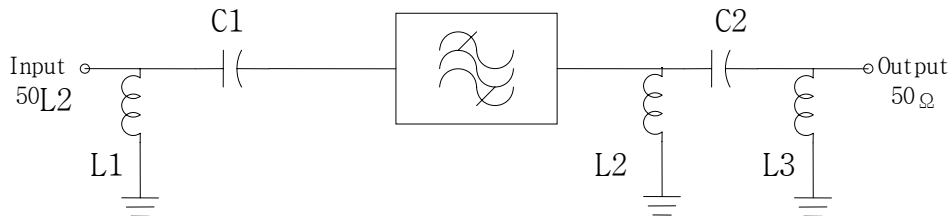

$$C1 = C2 = 68 \text{ pF}$$

$$L1 = L2 = L3 = 47 \text{ nH}$$

5. Marking Configuration

ITF¹⁾ 04A001²⁾

202539B³⁾

1) Manufacturer name

2) Lot Number



3) Part Number

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	202539B	
		Rev. Date	2004-04-28	
		Rev.	NI1001-CS01	3/5

SAW Bandpass Filter 202539B







6. Typical Performance (at +25℃)

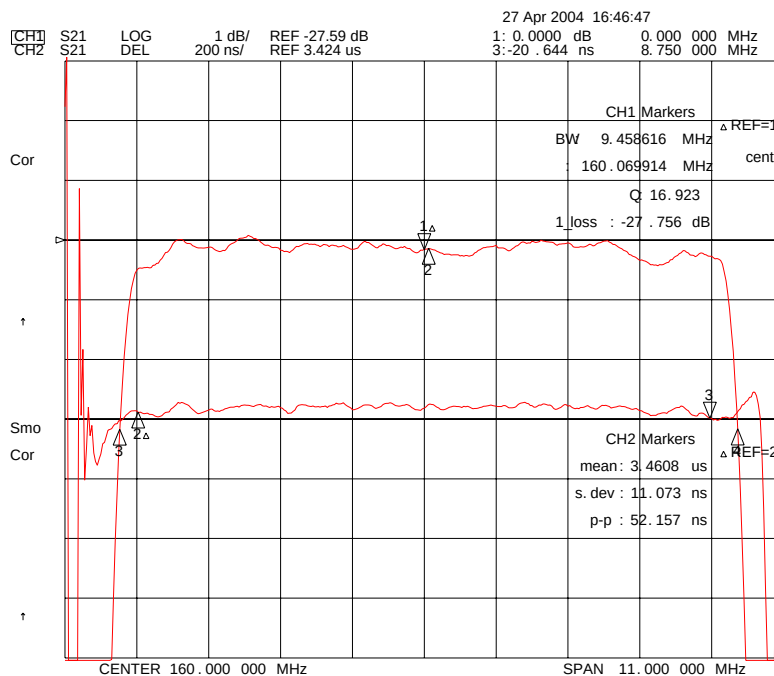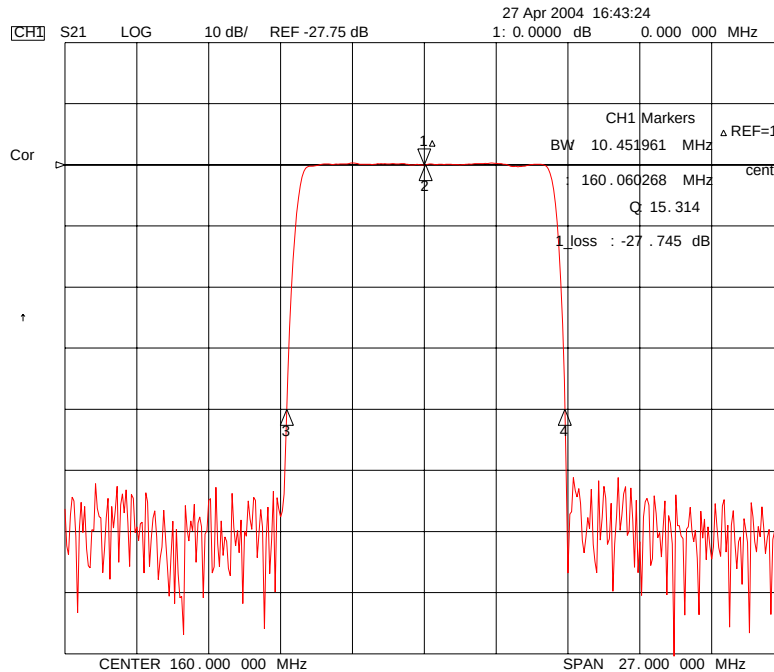

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809		Part No. 202539B	
			Rev. Date 2004-04-28	
			Rev. NI1001-CS01	4/5

SAW Bandpass Filter 202539B

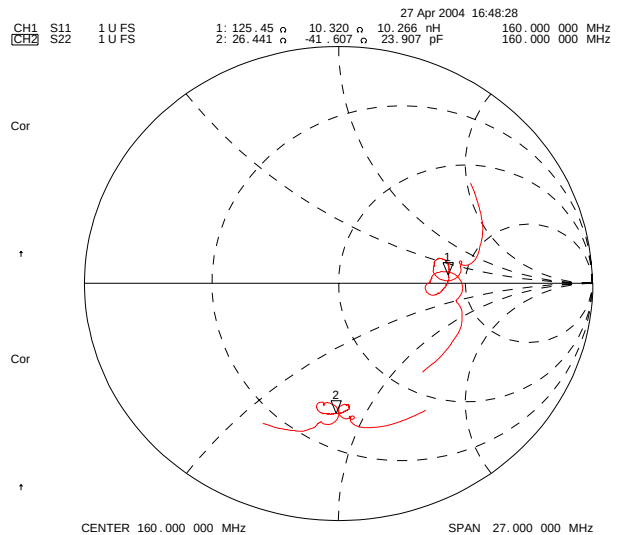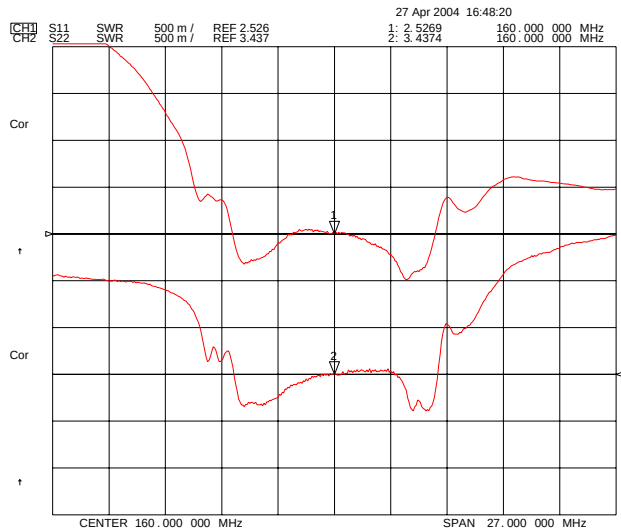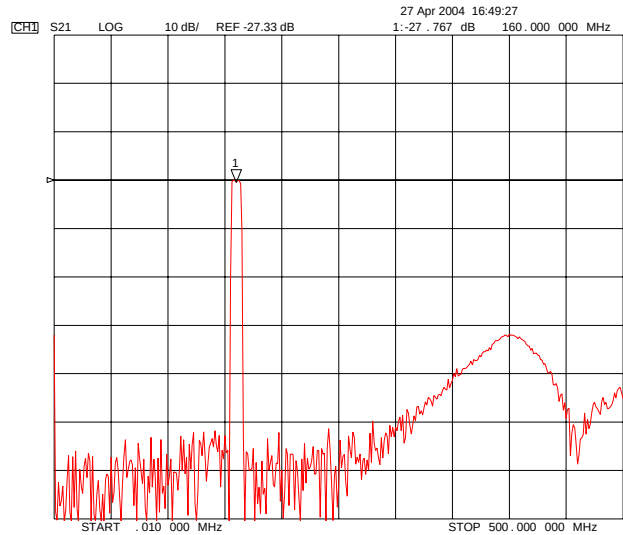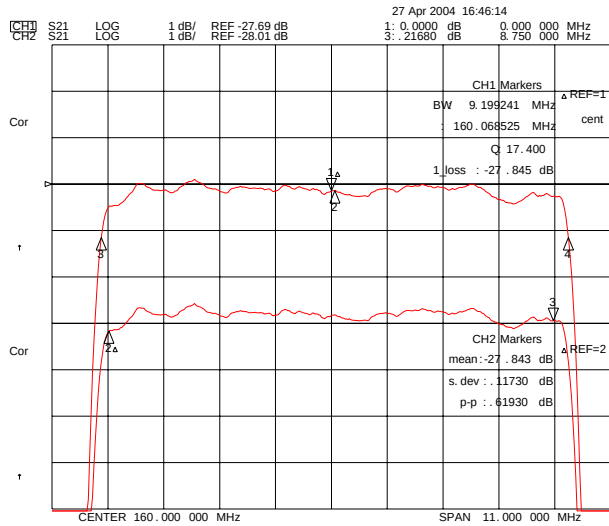

ITF Co., Ltd.
102-901, Bucheon Technopark 364,
Samjeong-Dong, Ojeong-Gu, Bucheon-City,
Gyeonggi-Do, Korea 421-809

Part No.

202539B

Rev. Date

2004-04-28

Rev.

NI1001-CS01

5/5