

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: 0015475184
Status: Active
Overview: cgrid_sl_products
Description: 2.54mm (.100") Pitch SL™ FFC/FPC Connector - Single Row Male Version D, 18 Circuits

Documents:
[3D Model](#)
[Drawing \(PDF\)](#)

[Product Specification PS-70430 \(PDF\)](#)
[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR19980
UL E29179

General

Product Family FFC/FPC Connectors
Series 70431
Comments Male
Overview cgrid_sl_products
Product Name SL™

Physical

Circuits (Loaded) 18
Contact Position N/A
Durability (mating cycles max) 50
Entry Angle Vertical
Flammability 94V-0
Number of Rows 1
Orientation Vertical
PCB Locator No
PCB Retention None
Packaging Type Tube
Pitch - Mating Interface (in) 0.100 In
Pitch - Mating Interface (mm) 2.54 mm
Polarized to PCB No
Stackable Yes
Surface Mount Compatible (SMC) N/A
Temperature Range - Operating -40°C to +105°C
Termination Interface: Style IDT or Pierce
Wire/Cable Type FFC/FPC


Electrical

Current - Maximum per Contact 2A
Voltage - Maximum 250V

Material Info

Reference - Drawing Numbers

Product Specification PS-70430
Sales Drawing SDA-70431-****

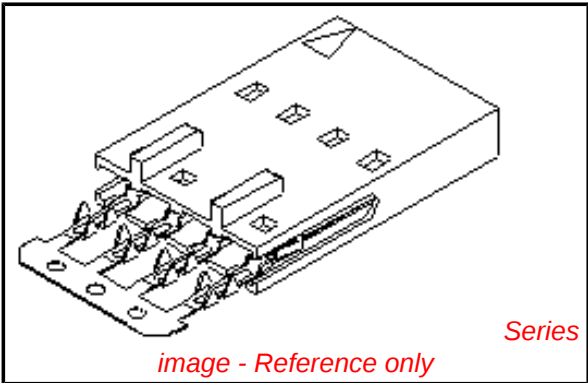

EU RoHS **China RoHS**
Compliance Status
Not Reviewed
REACH SVHC
Not Reviewed
Halogen-Free
Status
Not Reviewed


Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)



Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
70431Series

OPTION -A-


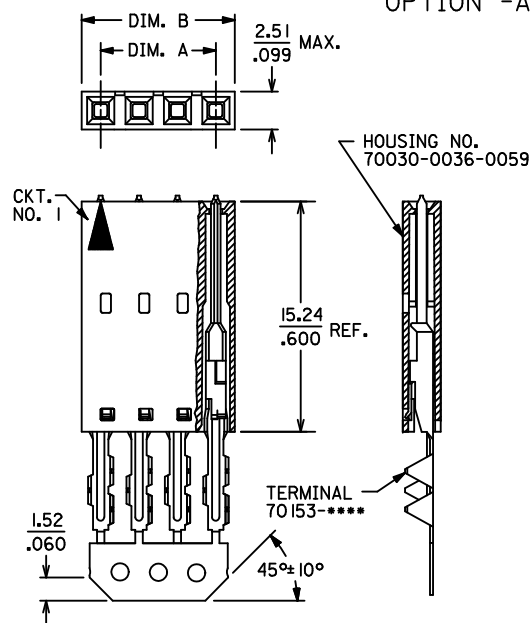


OPTION -D-

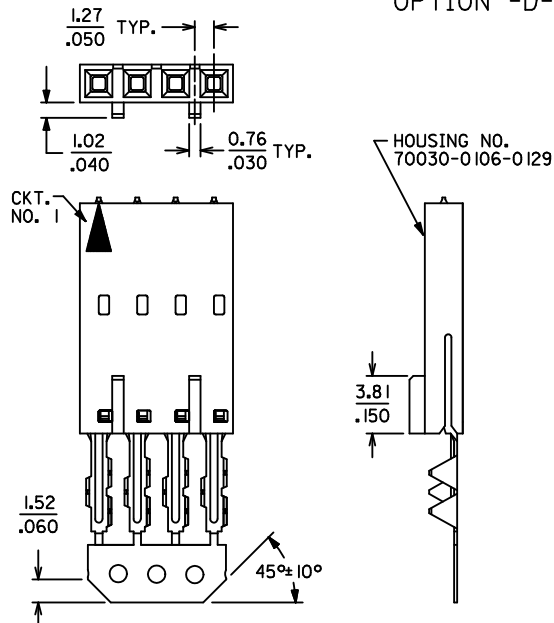

OPTIONAL CORE-OUT FOR
HOUSING OPTIONS A & D
CKT. SIZES 2-25
(FOR CONTROL OF BOW)

OPTION -G-

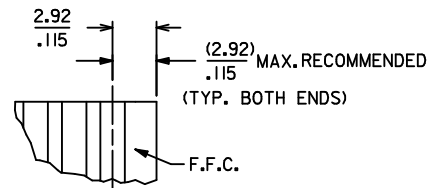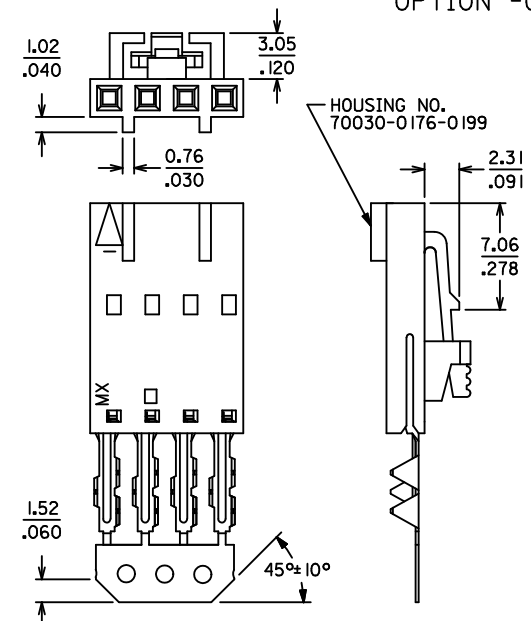

- NOTES:
- HOUSING: POLYESTER (PBT), UL94 V-0
COLOR: BLACK
 - FINISHES:
SEE PAGE 2 FOR PLATING FINISHES
 - PRODUCT SPECIFICATION: PS-70430
 - PACKAGING SPECIFICATION: PK-70873-0001
 - SEE CHART FOR CIRCUIT SIZES
 - TERMINALS ARE SHOWN PRE-LOADED INTO HOUSING
AND LOCKED INTO FIRST ROW OF LOCKING TANG
WINDOWS
 - ALL DIMENSIONS ARE FOR REFERENCE ONLY
 - SEE SHEET 2 FOR PART NUMBERS AND PLATINGS

CKT. SIZE	DIM. A (MAX.)	DIM. B (MAX.)
2	(2.54) .100	(5.05) .199
3	(5.08) .200	(7.59) .299
4	(7.62) .300	(10.13) .399
5	(10.16) .400	(12.67) .499
6	(12.70) .500	(15.21) .599
7	(15.24) .600	(17.75) .699
8	(17.78) .700	(20.29) .799
9	(20.32) .800	(22.83) .899
10	(22.86) .900	(25.37) .999
11	(25.40) 1.000	(27.91) 1.099
12	(27.94) 1.100	(30.45) 1.199
13	(30.48) 1.200	(32.99) 1.299
14	(33.02) 1.300	(35.53) 1.399
15	(35.56) 1.400	(38.07) 1.499
16	(38.10) 1.500	(40.61) 1.599
17	(40.64) 1.600	(43.15) 1.699
18	(43.18) 1.700	(45.69) 1.799
19	(45.72) 1.800	(48.23) 1.899
20	(48.26) 1.900	(50.77) 1.999
21	(50.80) 2.000	(53.31) 2.099
22	(53.34) 2.100	(55.85) 2.199
23	(55.88) 2.200	(58.39) 2.299
24	(58.42) 2.300	(60.93) 2.399
25	(60.96) 2.400	(63.47) 2.499

MODIFY PRODUCT SPEC				QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 4:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
EC NO: UCP2010-0987 DRWN:MSIBARRA 2009/12/28 CHKD:DMORGAN 2010/01/08 APPR:SMILLER 2010/01/11				DESCRIPTION		mm INCH		DRAWN BY DATE		TITLE ASSY, SL CONNECTOR, FFC MALE, SINGLE ROW 2.54/.100 GRID			
				▽=0		4 PLACES ± --- ± ---		MGB 12/21/88					
				▽=0		3 PLACES ± --- ± ---		CHECKED BY DATE					
				▽=0		2 PLACES ± --- ± ---		MGB 12/21/88					
				▽=0		1 PLACE ± --- ± ---		APPROVED BY DATE					
REV				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		ANGULAR ±1/2°		WAZ 12/21/88		MOLEX MOLEX INCORPORATED			
						MATERIAL NO.		DOCUMENT NO.		SHEET NO.			
						SEE TABLE		SDA-70431-****		1 OF 2			
						SIZE C		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

	13	12	11	10	9	8	7	6	5	4	3	2	1																																																												
J	CKT. SIZE	TIN PLATE OPTION -A-		TIN PLATE OPTION -D-		15 GOLD PLATE OPTION -A-		15 GOLD PLATE OPTION -D-		30 GOLD PLATE OPTION -A-		30 GOLD PLATE OPTION -D-		TIN PLATE OPTION -G-																																																											
		EDP. NO.	ENG. NO.	EDP. NO.	ENG. NO.	EDP. NO.	ENG. NO.	EDP. NO.	ENG. NO.	EDP. NO.	ENG. NO.	EDP. NO.	ENG. NO.	EDP. NO.	ENG. NO.																																																										
	2	15-38-9020	A-70431-0001	15-38-9022	A-70431-0071	15-47-4028	A-70431-0176	15-47-5020	A-70431-0246	15-47-5022	A-70431-0351	15-47-5024	A-70431-0421																																																												
	3	-9030	-0002	-9032	-0072	-4038	-0177	-5030	-0247	-5032	-0352	-5034	-0422																																																												
	4	-9040	-0003	-9042	-0073	-4048	-0178	-5040	-0248	-5042	-0353	-5044	-0423																																																												
I	5	-9050	-0004	-9052	-0074	-4058	-0179	-5050	-0249	-5052	-0354	-5054	-0424																																																												
	6	-9060	-0005	-9062	-0075	-4068	-0180	-5060	-0250	-5062	-0355	-5064	-0425																																																												
	7	-9070	-0006	-9072	-0076	-4078	-0181	-5070	-0251	-5072	-0356	-5074	-0426																																																												
	8	-9080	-0007	-9082	-0077	-4088	-0182	-5080	-0252	-5082	-0357	-5084	-0427																																																												
	9	-9090	-0008	-9092	-0078	-4098	-0183	-5090	-0253	-5092	-0358	-5094	-0428																																																												
	10	-9100	-0009	-9102	-0079	-4108	-0184	-5100	-0254	-5102	-0359	-5104	-0429	15-38-9103	A-70431-0149																																																										
	11	-9110	-0010	-9112	-0080	-4118	-0185	-5110	-0255	-5112	-0360	-5114	-0430																																																												
H	12	-9120	-0011	-9122	-0081	-4128	-0186	-5120	-0256	-5122	-0361	-5124	-0431																																																												
	13	-9130	-0012	-9132	-0082	-4138	-0187	-5130	-0257	-5132	-0362	-5134	-0432																																																												
	14	-9140	-0013	-9142	-0083	-4148	-0188	-5140	-0258	-5142	-0363	-5144	-0433																																																												
	15	-9150	-0014	-9152	-0084	-4158	-0189	-5150	-0259	-5152	-0364	-5154	-0434																																																												
	16	-9160	-0015	-9162	-0085	-4168	-0190	-5160	-0260	-5162	-0365	-5164	-0435																																																												
	17	-9170	-0016	-9172	-0086	-4178	-0191	-5170	-0261	-5172	-0366	-5174	-0436																																																												
G	18	-9180	-0017	-9182	-0087	-4188	-0192	-5180	-0262	-5182	-0367	-5184	-0437																																																												
	19	-9190	-0018	-9192	-0088	-4198	-0193	-5190	-0263	-5192	-0368	-5194	-0438																																																												
	20	-9200	-0019	-9202	-0089	-4208	-0194	-5200	-0264	-5202	-0369	-5204	-0439																																																												
	21	-9210	-0020	-9212	-0090	-4218	-0195	-5210	-0265	-5212	-0370	-5214	-0440																																																												
	22	-9220	-0021	-9222	-0091	-4228	-0196	-5220	-0266	-5222	-0371	-5224	-0441																																																												
	23	-9230	-0022	-9232	-0092	-4238	-0197	-5230	-0267	-5232	-0372	-5234	-0442																																																												
	24	-9240	-0023	-9242	-0093	-4248	-0198	-5240	-0268	-5242	-0373	-5244	-0443																																																												
F	25	15-38-9250	A-70431-0024	15-38-9252	A-70431-0094	15-47-4258	A-70431-0199	15-47-5250	A-70431-0269	15-47-5252	A-70431-0374	15-47-5254	A-70431-0444																																																												
<table><tr><td>PLATING PER ES-88:</td><td>CARRIER STRIP COLOR CODE</td></tr><tr><td>TIN</td><td>NONE</td></tr><tr><td>15 GOLD</td><td>YELLOW</td></tr><tr><td>30 GOLD</td><td>RED</td></tr></table> PLATING CHART PER ES-88-*** TIN: TIN OVERALL THICKNESS: 3.81 MICROMETERS (150 MICROINCHES) MINIMUM ALL OVER A NICKEL UNDERPLATE. 15 GOLD: SELECTIVE GOLD (Au) WITH SELECTIVE TIN THICKNESS: 0.38 MICROMETERS (15 MICROINCHES) MINIMUM GOLD (Au) IN SELECT AREA 1.90 MICROMETERS (75 MICROINCHES) MINIMUM TIN IN SELECT AREA ALL OVER A NICKEL UNDERPLATE. 30 GOLD: SELECTIVE GOLD (Au) WITH SELECTIVE TIN THICKNESS: 0.76 MICROMETERS (30 MICROINCHES) MINIMUM GOLD (Au) IN SELECT AREA 1.90 MICROMETERS (75 MICROINCHES) MINIMUM TIN IN SELECT AREA ALL OVER A NICKEL UNDERPLATE.																PLATING PER ES-88:	CARRIER STRIP COLOR CODE	TIN	NONE	15 GOLD	YELLOW	30 GOLD	RED	E																																																	
PLATING PER ES-88:	CARRIER STRIP COLOR CODE																																																																								
TIN	NONE																																																																								
15 GOLD	YELLOW																																																																								
30 GOLD	RED																																																																								
D	<table><tr><td rowspan="4">SEE SHEET 1 EC NO: UCP2010-0987 DRAWN:MS BARRA 2009/12/28 CHKD:DMORGAN 2010/01/08 APPR:SMILLER 2010/01/11</td><td rowspan="4">QUALITY SYMBOLS ▽=0 ▽=0 ▽=0</td><td colspan="2">GENERAL TOLERANCES (UNLESS SPECIFIED)</td><td colspan="2">DIMENSION STYLE MM/IN</td><td>SCALE 1:1</td><td>DESIGN UNITS INCH</td><td colspan="2">THIRD ANGLE PROJECTION</td><td colspan="5" rowspan="4">ASSY, SL CONNECTOR, FFC MALE, SINGLE ROW 2.54/.100 GRID MOLEX INCORPORATED SDA-70431-**** 2 OF 2</td></tr><tr><td colspan="2">4 PLACES ± --- ± ---</td><td colspan="2">DRAWN BY MGB</td><td colspan="2">DATE 12/21/88</td></tr><tr><td colspan="2">3 PLACES ± --- ± ---</td><td colspan="2">CHECKED BY MGB</td><td colspan="2">DATE 12/21/88</td></tr><tr><td colspan="2">2 PLACES ± --- ± ---</td><td colspan="2">APPROVED BY WAZ</td><td colspan="2">DATE 12/21/88</td></tr><tr><td colspan="2">1 PLACE ± --- ± ---</td><td colspan="2">ANGULAR ±1/2°</td><td colspan="2">MATERIAL NO. SEE TABLE</td><td colspan="2">DOCUMENT NO. SDA-70431-****</td><td colspan="2">SHEET NO. 2 OF 2</td></tr><tr><td colspan="2">DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS</td><td colspan="2">SIZE C</td><td colspan="10">THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</td></tr></table>															SEE SHEET 1 EC NO: UCP2010-0987 DRAWN:MS BARRA 2009/12/28 CHKD:DMORGAN 2010/01/08 APPR:SMILLER 2010/01/11	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		ASSY, SL CONNECTOR, FFC MALE, SINGLE ROW 2.54/.100 GRID MOLEX INCORPORATED SDA-70431-**** 2 OF 2					4 PLACES ± --- ± ---		DRAWN BY MGB		DATE 12/21/88		3 PLACES ± --- ± ---		CHECKED BY MGB		DATE 12/21/88		2 PLACES ± --- ± ---		APPROVED BY WAZ		DATE 12/21/88		1 PLACE ± --- ± ---		ANGULAR ±1/2°		MATERIAL NO. SEE TABLE		DOCUMENT NO. SDA-70431-****		SHEET NO. 2 OF 2		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE C		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										C
SEE SHEET 1 EC NO: UCP2010-0987 DRAWN:MS BARRA 2009/12/28 CHKD:DMORGAN 2010/01/08 APPR:SMILLER 2010/01/11	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		ASSY, SL CONNECTOR, FFC MALE, SINGLE ROW 2.54/.100 GRID MOLEX INCORPORATED SDA-70431-**** 2 OF 2																																																															
		4 PLACES ± --- ± ---		DRAWN BY MGB		DATE 12/21/88																																																																			
		3 PLACES ± --- ± ---		CHECKED BY MGB		DATE 12/21/88																																																																			
		2 PLACES ± --- ± ---		APPROVED BY WAZ		DATE 12/21/88																																																																			
1 PLACE ± --- ± ---		ANGULAR ±1/2°		MATERIAL NO. SEE TABLE		DOCUMENT NO. SDA-70431-****		SHEET NO. 2 OF 2																																																																	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE C		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																																																																					
B																B																																																									
A																A																																																									
	12	11	10	9	8	7	6	5	4	3	2	1																																																													