



## HIGH EFFICIENCY GLASS PASSIVATED RECTIFIER

### HER151G THRU HER158G

VOLTAGE RANGE

50 to 1000 Volts

CURRENT


1.5 Ampere

### FEATURES

- Glass passivated chip junction
- Low power loss, high efficiency
- Low leakage
- High speed switching
- High surge capacity
- High temperature soldering guaranteed  
260°C/10 seconds, 0.375" (9.5mm) lead length

### MECHANICAL DATA

- Case: Transfer molded plastic
- Epoxy: UL94V-0 rate flame retardant
- Polarity: Color band denotes cathode end
- Lead: Plated axial lead, solderable per MIL-STD-202E method 208C
- Mounting position: Any
- Weight: 0.014ounce, 0.39 gram

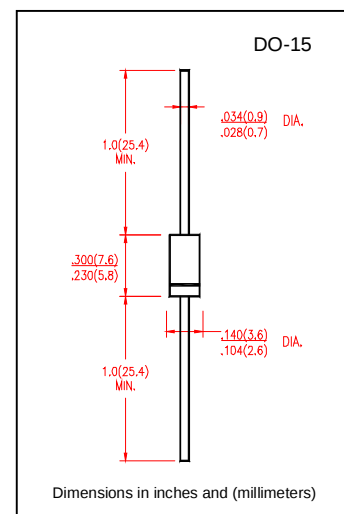

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

|                                                                                                                      |                        | SYMBOLS            | HER 151G      | HER 152G | HER 153G | HER 154G | HER 155G | HER 156G | HER 157G | HER 158G | UNIT  |
|----------------------------------------------------------------------------------------------------------------------|------------------------|--------------------|---------------|----------|----------|----------|----------|----------|----------|----------|-------|
| Maximum Repetitive Peak Reverse Voltage                                                                              |                        | V <sub>RRM</sub>   | 50            | 100      | 200      | 300      | 400      | 600      | 800      | 1000     | Volts |
| Maximum RMS Voltage                                                                                                  |                        | V <sub>RMS</sub>   | 35            | 70       | 140      | 210      | 280      | 420      | 560      | 700      | Volts |
| Maximum DC Blocking Voltage                                                                                          |                        | V <sub>DC</sub>    | 50            | 100      | 200      | 300      | 400      | 600      | 800      | 1000     | Volts |
| Maximum Average Forward Rectified Current<br>0.375" (9.5mm) lead length at T <sub>A</sub> =50°C                      |                        | I <sub>(AV)</sub>  | 1.5           |          |          |          |          |          |          |          | Amps  |
| Peak Forward Surge Current<br>8.3ms single half sine-wave superimposed on<br>rated load (JEDEC method)               |                        | I <sub>FSM</sub>   | 50            |          |          |          |          |          |          |          | Amps  |
| Maximum Instantaneous Forward Voltage at 1.5A                                                                        |                        | V <sub>F</sub>     | 1.0           |          |          | 1.3      |          | 1.5      | 1.7      |          | Volts |
| Maximum DC Reverse Current at rated<br>DC Blocking Voltage at                                                        | T <sub>A</sub> = 25°C  | I <sub>R</sub>     | 5.0           |          |          |          |          |          |          |          | μA    |
|                                                                                                                      | T <sub>A</sub> = 125°C |                    | 250           |          |          |          |          |          |          |          |       |
| Maximum Full Load Reverse Current, full cycle<br>average 0.375" (9.5mm) lead length at T <sub>L</sub> =55°C          |                        | I <sub>R(AV)</sub> | 100           |          |          |          |          |          |          |          | μA    |
| Maximum Reverse Recovery Time<br>Test conditions I <sub>F</sub> =0.5A, I <sub>R</sub> =1.0A, I <sub>RR</sub> =0.25A, |                        | t <sub>rr</sub>    | 50            |          |          |          |          | 75       |          |          | nS    |
| Typical Junction Capacitance (NOTE 2)                                                                                |                        | C <sub>J</sub>     | 30            |          |          |          |          |          | 20       |          | pF    |
| Typical Thermal Resistance (NOTE 1)                                                                                  |                        | R <sub>θJA</sub>   | 40            |          |          |          |          |          |          |          | °C/W  |
| Operating Junction Temperature Range                                                                                 |                        | T <sub>J</sub>     | (-55 to +150) |          |          |          |          |          |          |          | °C    |
| Storage Temperature Range                                                                                            |                        | T <sub>STG</sub>   | (-55 to +150) |          |          |          |          |          |          |          | °C    |

#### Notes:

1. Thermal Resistance from Junction to ambient with 0.375" (9.5mm) lead length, PCB mounted.
2. Measured at 1.0MHz and applied reverse voltage of 4.0V



## HIGH EFFICIENCY GLASS PASSIVATED RECTIFIER

### HER151G THRU HER158G

|               |                  |
|---------------|------------------|
| VOLTAGE RANGE | 50 to 1000 Volts |
| CURRENT       | 1.5 Ampere       |

## RATING AND CHARACTERISTIC CURVES HER151G THRU HER158G

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

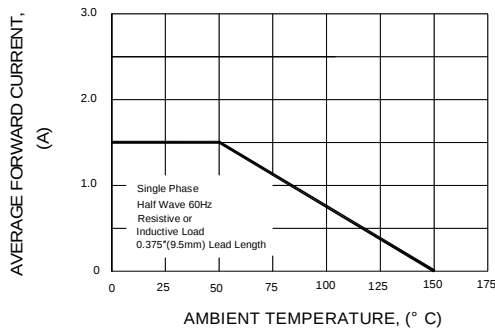


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

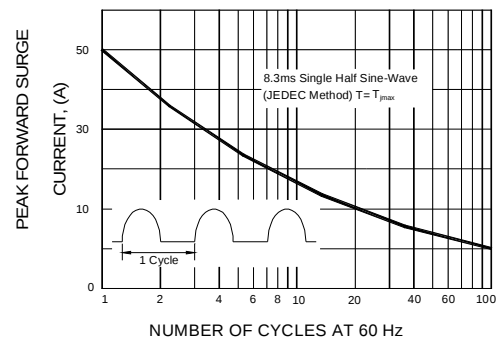


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

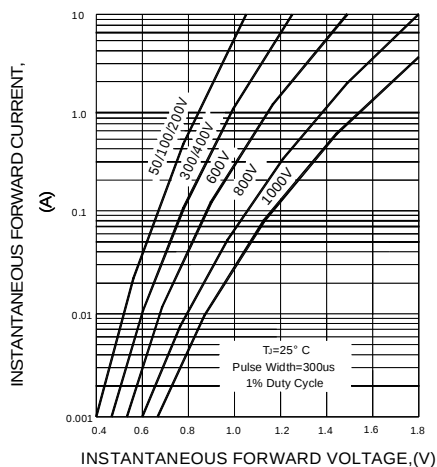


FIG.4-TYPICAL REVERSE CHARACTERISTICS

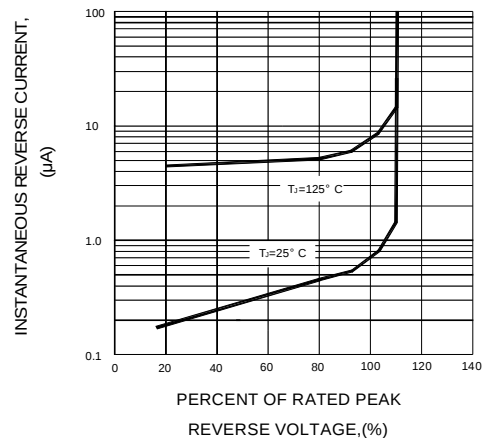


FIG.5-TYPICAL JUNCTION CAPACITANCE


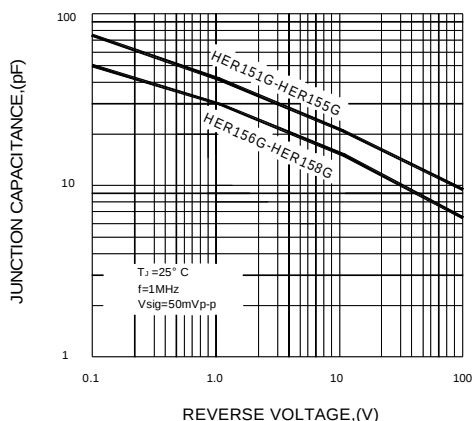


FIG.6-TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

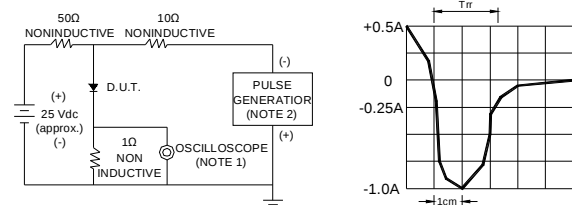

- NOTES : 1. Rise Time=7ns max. Input Impedance= 1 megohm, 22pF  
2. Rise time=10ns max. Source Impedance= 50 ohms

SET TIME BASE FOR 50/100ns/cm