


Three-Phase Bridge Rectifier, 150A


MTP15008 Thru MTP15018

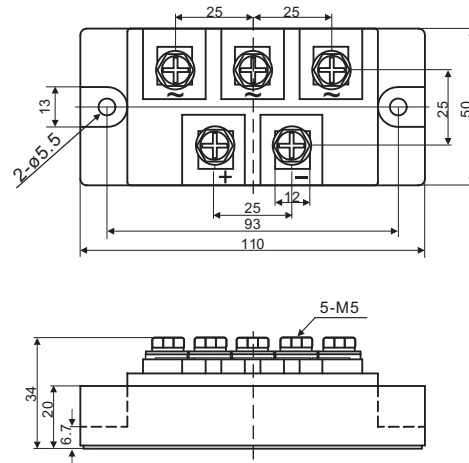

All dimensions in millimeters

FEATURES

- UL recognition file number E320098
- Typical IR less than 2.0 μ A
- High surge current capability
- Low thermal resistance
- Compliant to RoHS
- Isolation voltage up to 2500V



TYPICAL APPLICATIONS

General purpose use in AC/DC bridge full wave rectification for big power supply, field supply for DC motor, industrial automation applications.

ADVANTAGE

- International standard package
- Epoxy meets UL 94 V-O flammability rating
- Small volume, light weight
- Small thermal resistance
- Weight: 320g (11.3 ozs)

PRIMARY CHARACTERISTICS

$I_{F(AV)}$	150A
V_{RRM}	800V to 1800V
I_{FSM}	1500A
I_R	20 μ A
V_F	1.3V
$T_{Jmax.}$	150°C

Nell High Power Products

MAJOR RATINGS AND CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)							
PARAMETER	SYMBOL	MTP150					UNIT
		08	10	12	16	18	
Maximum repetitive peak reverse voltage	V_{RRM}	800	1000	1200	1600	1800	V
Peak reverse non-repetitive voltage	V_{RSM}	900	1100	1300	1700	1900	V
Maximum DC blocking voltage	V_{DC}	800	1000	1200	1600	1800	V
Maximum average forward rectified output current	$I_{F(AV)}$	150					A
Peak forward surge current single sine-wave superimposed on rated load	I_{FSM}	1500					A
Rating (non-repetitive, for t greater than 1 ms and less than 8.3 ms) for fusing	I^2t	11400					A ² s
RMS isolation voltage from case to leads	V_{ISO}	2500					V
Operating junction storage temperature range	T_J	-40 to 150					$^\circ\text{C}$
Storage temperature range	T_{STG}	-40 to 125					$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)							
PARAMETER	TEST CONDITIONS	SYMBOL	MTP150				
			08	10	12	16	18
Maximum instantaneous forward drop per diode	$I_F = 150\text{A}$	V_F	1.3				
Maximum reverse DC current at rated DC blocking voltage per diode	$T_A = 25^\circ\text{C}$	I_R	20				
	$T_A = 150^\circ\text{C}$		12				

THERMAL AND MECHANICAL ($T_A = 25^\circ\text{C}$ unless otherwise noted)							
PARAMETER	TEST CONDITIONS	SYMBOL	MTP150				
			08	10	12	16	18
Typical thermal resistance junction to case	Single-side heat dissipation, sine half wave	$R_{\theta JC}^{(1)}$	0.14				
Mounting torque $\pm 10\%$ to heatsink M5 to terminal M5	A mounting compound is recommended and the torque should be rechecked after a period of 3 hours to allow for the spread of the compound.		4				
			4				
Approximate weight			320				

Notes

- (1) With heatsink, single side heat dissipation, half sine wave.
 (2) M5 screw.

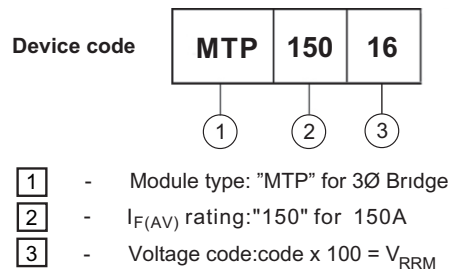


Fig.1 Forward current vs. Forward voltage

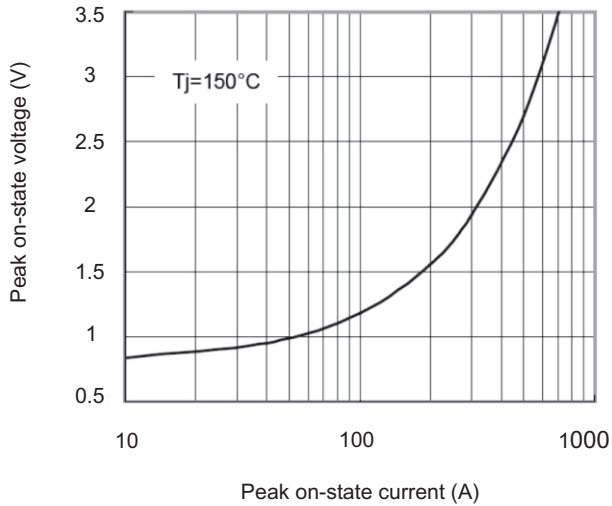


Fig.2 Thermal Impedance (junction to case)

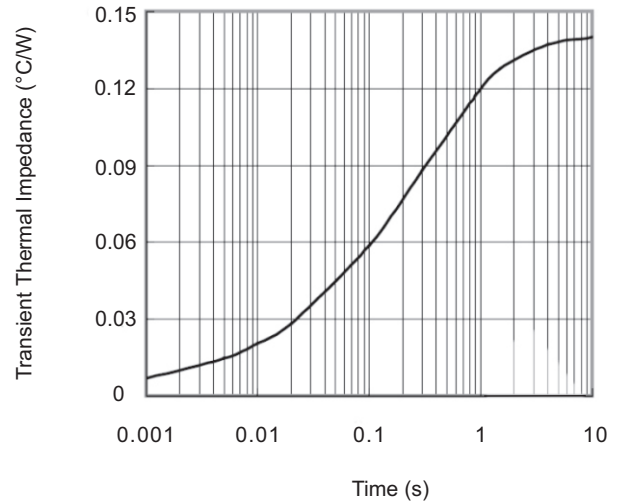


Fig.3 Power Consumption vs. Average Current

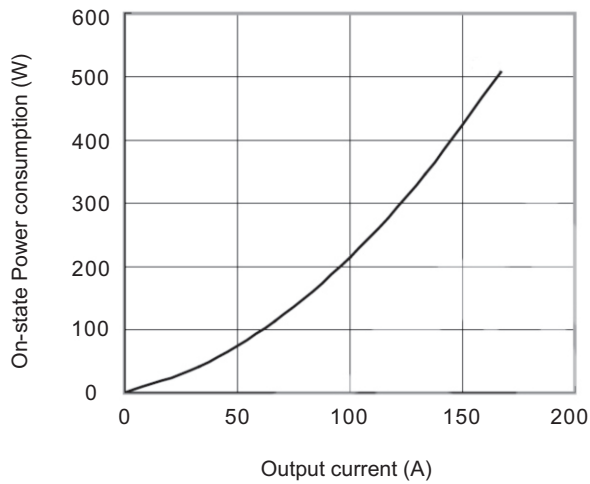


Fig.4 Case Temperature vs. O-state Current

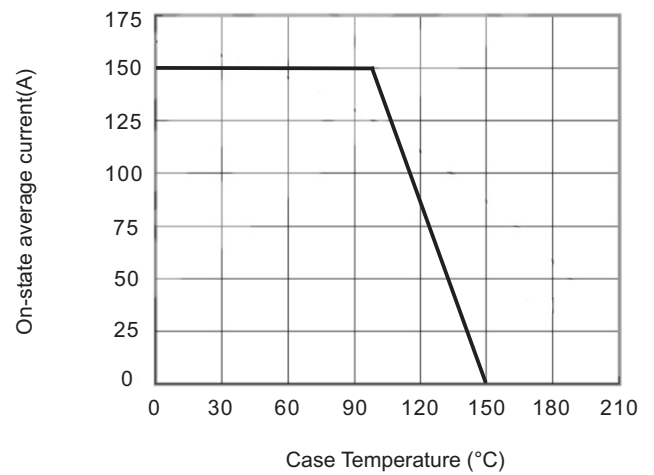


Fig.5 Forward Surge Current vs. Cycle

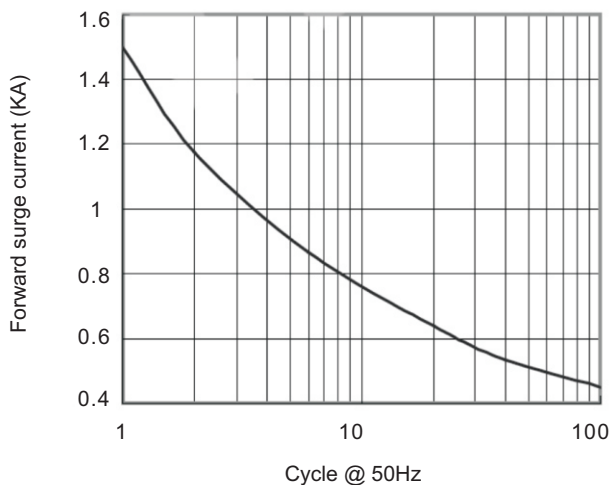


Fig.6 I^2t characteristic

