



BY296 THRU BY299

2.0 AMP. FAST RECOVERY RECTIFIERS

Voltage Range
100 to 800 Volts
Current
2.0 Amperes


Features

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability

Mechanical Data

- Cases: Molded plastic
- Epoxy: UL 94V-0 rate flame retardant
- Lead: Axial leads, solderable per MIL-STD-202, Method 208 guaranteed
- Polarity: Color band denotes cathode end
- High temperature soldering guaranteed:
250°C/10 seconds/.375"(.9.5mm) lead
lengths at 5 lbs.(2.3kg) tension
- Weight: 1.2 gram

DO-201AD

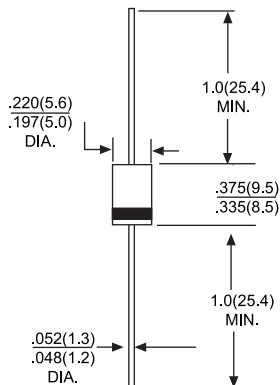

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%

Type Number		BY296	BY297	BY298	BY299	UNITS
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	100	200	400	800	V
Maximum RMS Voltage	V _{RMS}	70	140	280	560	V
Maximum DC Blocking Voltage	V _{DC}	100	200	400	800	V
Maximum Average Forward Rectified Current .375"(9.5mm) Lead Length @T _A = 55°C	I _{F(AV)}	2.0				A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I _{FSM}	70				A
Maximum Instantaneous Forward Voltage @3.0A	V _F	1.2				V
Maximun DC Reverse Current @ T _A = 25°C at Rated DC Blocking Voltage @ T _A = 100°C	I _R	5.0 100				uA uA
Maximum Reverse Recovery Time (Note 1)	T _{RR}	250				nS
Typical Junction Capacitance (Note 2)	C _J	30				pF
Operating Temperature Range	T _J	-55 to +125				°C
Storage Temperature Range	T _{STG}	-55 to +150				°C

NOTES: 1. Reverse Recovery Test Conditions: I_F=0.5A, I_R=1.0A, I_{RR}=0.25A
2. Measured at 1 MHz and Applied Reverse Voltage of 4.0 Volts D.C.

RATING AND CHARACTERISTIC CURVES BY296 THRU BY299



FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

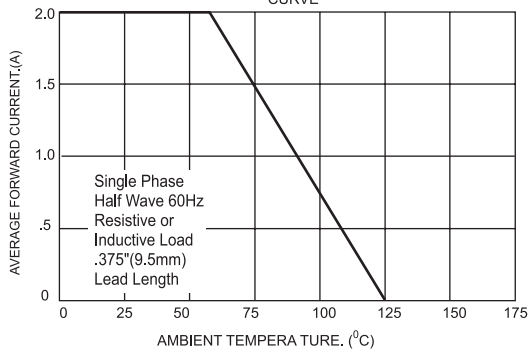


FIG.2- MAXIMUM NON-REPETITIVE PEAK FORDWARD SURGE CURRENT

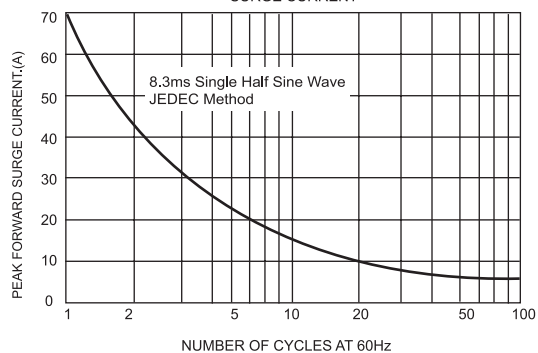


FIG.3-TYPICAL FORWARD CHARACTERISTICS

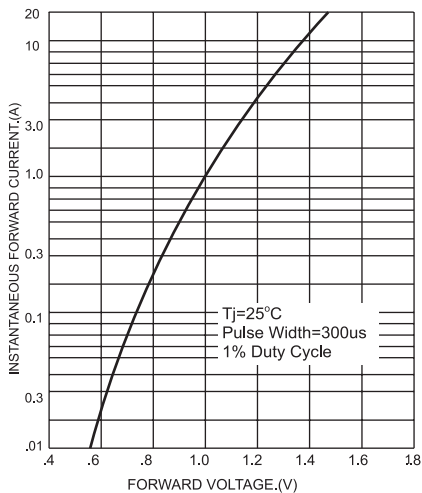


FIG.4- TYPICAL JUNCTION CAPACITANCE

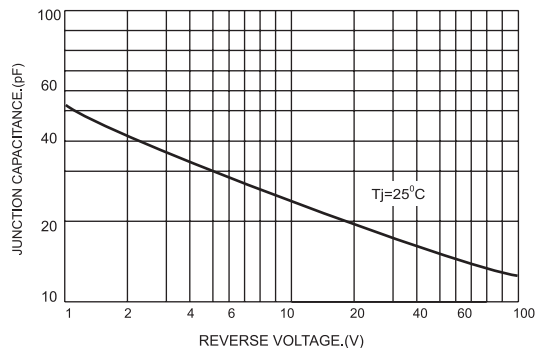


FIG.5- REVERSE RECOVER TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

