



SAW Components

Data Sheet B7837

Data Sheet

An abstract graphic featuring the word "EPCOS" in large, glowing, 3D letters. The letters are white with a blue outline and a blue glow. They are set against a dark, textured background that includes a faint, stylized globe and circuitry patterns. The overall effect is futuristic and high-tech.



SAW Components

B7837

Low-Loss Filter for Mobile Communication

942,5 MHz

Data Sheet






Chip Size SAW package QCS5E

Features

- Low-loss RF filter for mobile telephone EGSM system, receive path
- Very low insertion attenuation
- Low amplitude ripple
- Usable passband 35 MHz
- Unbalanced to balanced operation
- Impedance transformation from 50 Ω to 150 Ω
- Suitable for GPRS class 1 to 12
- Package for Surface Mounted Technology (SMT)
- Pb-free

Terminals


- Ni, gold-plated

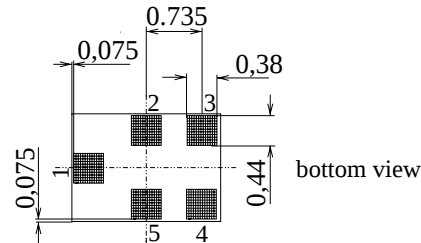

Dimensions in mm, approx. weight 0,007g

Pin configuration

- | | |
|------|-------------------|
| 1 | Input, unbalanced |
| 3, 4 | Output, balanced |
| 2, 5 | Case ground |

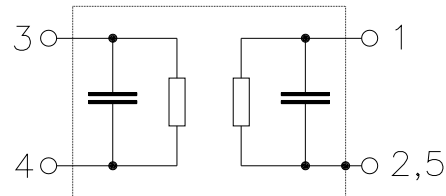

Type	Ordering code	Marking and Package according to	Packing according to
B7837	B39941-B7837-K410	C61157-A7-A131	F61074-V8151-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 30 / + 85	$^{\circ}\text{C}$	machine model, 10 pulses
Storage temperature range	T_{stg}	- 40 / + 85	$^{\circ}\text{C}$	
DC voltage	V_{DC}	5	V	
ESD voltage	V_{ESD}	100*	V	
Input Power at				peak power of GSM signal, duty cycle 4:8
GSM850, GSM900	P_{IN}	15	dBm	
GSM1800, GSM1900				
Tx bands				

* - acc. to JESD22-A115A (Machine Model), 10 negative & 10 positive pulses



SAW Components

B7837

Low-Loss Filter for Mobile Communication

942,5 MHz

Data Sheet



Characteristics

Operating temperature range: $T = 25\text{ }^{\circ}\text{C}$
Terminating source impedance: $Z_S = 50\text{ }\Omega$
Terminating load impedance: $Z_L = 150\text{ }\Omega \parallel 82\text{ nH (balanced)}$

		min.	typ.	max.	
Center frequency	f_C	—	942,5	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$				
	925,0 ... 960,0 MHz	—	1,4	1,7	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
	925,0 ... 960,0 MHz	—	0,7	1,0	dB
Input VSWR					
	925,0 ... 960,0 MHz	—	1,8	2,0	
Output VSWR					
	925,0 ... 960,0 MHz	—	1,8	2,0	
Attenuation					
	0,0 ... 480,0 MHz	45	53	—	dB
	480,0 ... 905,0 MHz	30	34	—	dB
	905,0 ... 915,0 MHz	25	27	—	dB
	980,0 ... 1000,0 MHz	25	29	—	dB
	1000,0 ... 1850,0 MHz	28	38	—	dB
	1850,0 ... 6000,0 MHz	40	44	—	dB
Amplitude balance ($ S_{31} / S_{21} $)					
	925,0 ... 960,0 MHz	-1,0	-0,5 / +0,7	1,0	dB
phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^{\circ}$)					
	925,0 ... 960,0 MHz	-5	-3 / +2	5	degree
Diff. to common mode suppression	S_{SC12}				
	925,0 ... 960,0 MHz	22	29	—	dB
	824,0 ... 995,0 MHz	22	29	—	dB
	1648,0 ... 1990,0 MHz	22	45	—	dB
	3296,0 ... 3980,0 MHz	20	48	—	dB



SAW Components

B7837

Low-Loss Filter for Mobile Communication

942,5 MHz

Data Sheet



Characteristics

Operating temperature range: $T = -10$ to $+80$ °C
Terminating source impedance: $Z_S = 50 \Omega$
Terminating load impedance: $Z_L = 150 \Omega \parallel 82 \text{ nH}$ (balanced)

		min.	typ.	max.	
Center frequency	f_C	—	942,5	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$	—	1,5	2,0 ¹⁾	dB
925,0 ... 960,0 MHz					
Amplitude ripple (p-p)	$\Delta\alpha$	—	0,8	1,2	dB
925,0 ... 960,0 MHz					
Input VSWR		—	1,8	2,0	
925,0 ... 960,0 MHz					
Output VSWR		—	1,8	2,0	
925,0 ... 960,0 MHz					
Attenuation					
0,0 ... 480,0 MHz		45	53	—	dB
480,0 ... 905,0 MHz		30	34	—	dB
905,0 ... 915,0 MHz		20 ²⁾	27	—	dB
980,0 ... 1000,0 MHz		25	29	—	dB
1000,0 ... 1850,0 MHz		28	38	—	dB
1850,0 ... 6000,0 MHz		40	44	—	dB
Amplitude balance ($ S_{31}/S_{21} $)					
925,0 ... 960,0 MHz		-1,0	-0,5 / +0,7	1,0	dB
phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^\circ$)					
925,0 ... 960,0 MHz		-5	-3 / +2	5	degree
Diff. to common mode suppression	S_{sc12}				
925,0 ... 960,0 MHz		22	29	—	dB
824,0 ... 995,0 MHz		22	29	—	dB
1648,0 ... 1990,0 MHz		22	45	—	dB
3296,0 ... 3980,0 MHz		20	48	—	dB

¹⁾ 2,2 dB for $T = -30^\circ\text{C}$ to $+85^\circ\text{C}$

²⁾ 17 dB for $T = -30^\circ\text{C}$ to $+85^\circ\text{C}$



SAW Components

B7837


Low-Loss Filter for Mobile Communication

942,5 MHz


Data Sheet



Transfer function (passband)

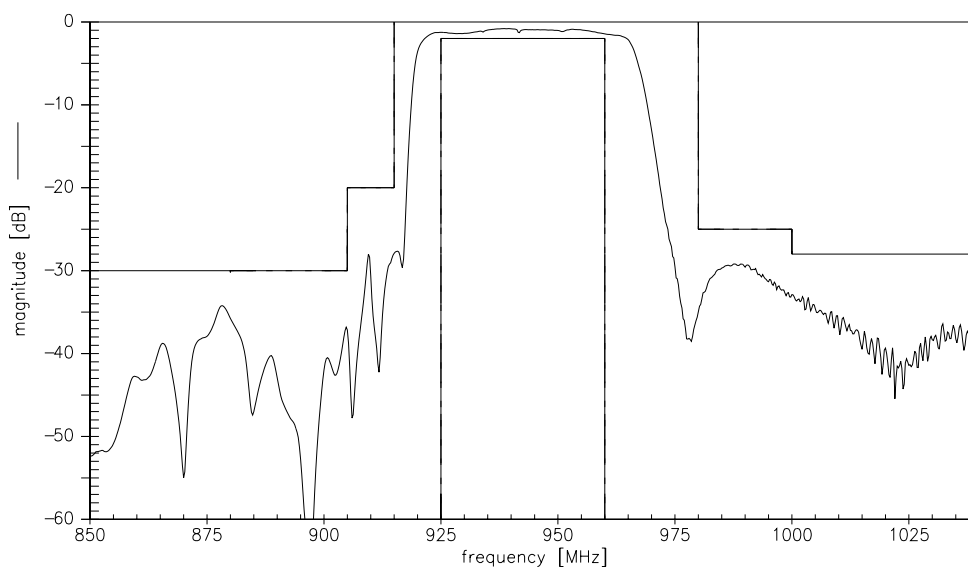

Transfer function (wideband)

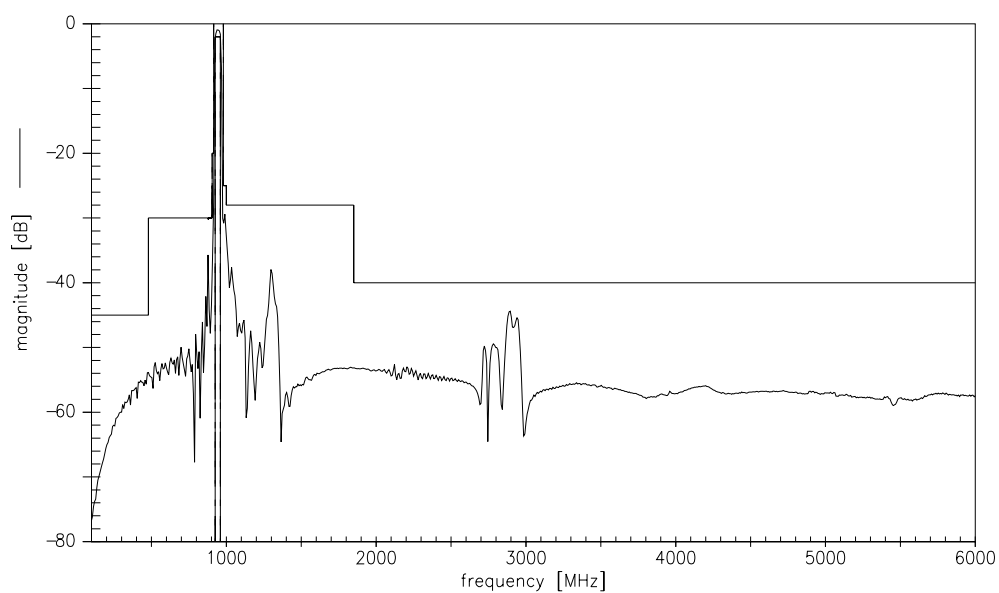



SAW Components

B7837

Low-Loss Filter for Mobile Communication

942,5 MHz

Data Sheet



Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC WT

P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2004. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.