

PART NUMBERING GUIDE

Environmental/Mechanical Specifications on page F5

Package		OAH10	100	48	A	T	- 70.000MHz	Pin One Connection
OAH10 = 14 Pin Dip / 5.0Vdc / HCMOS-TTL								Blank = No Connect, T = Tri State Enable High
OAH310 = 14 Pin Dip / 3.3Vdc / HCMOS-TTL								
OBH10 = 8 Pin Dip / 5.0Vdc / HCMOS-TTL								Output Symmetry
OBH310 = 8 Pin Dip / 3.3Vdc / HCMOS-TTL								Blank = 40/60%, A = 45/55%
Inclusive Stability								Operating Temperature Range
100= +/-100ppm, 50= +/-50ppm, 30= +/-30ppm, 25= +/-25ppm,								Blank = 0°C to 70°C, 27 = -20°C to 70°C, 48 = -40°C to 85°C
20= +/-20ppm, 15= +/-15ppm, 10= +/-10ppm								

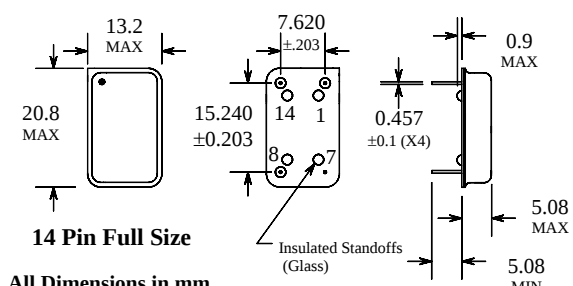
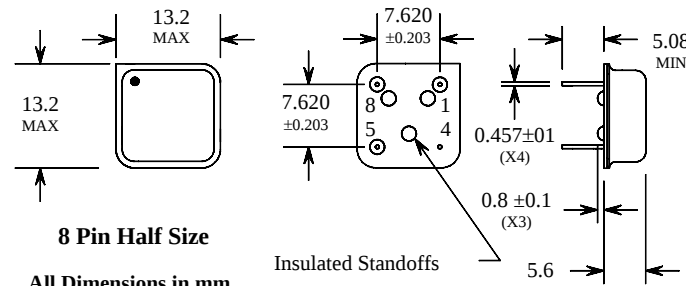
ELECTRICAL SPECIFICATIONS

Revision: 1997-B

Frequency Range		50.000MHz to 155.520MHz
Operating Temperature Range		0°C to 70°C / -40°C to 85°C
Storage Temperature Range		-55°C to 125°C
Supply Voltage		5.0Vdc ±10%, 3.3Vdc ±10%
Input Current	70.000M to 155.520MHz	50mA Maximum
Frequency Tolerance / Stability	Inclusive of Operating Temperature Range, Supply Voltage and Load	±100ppm, ±50ppm, ±30ppm, ±25ppm, ±20ppm, ±15ppm or ±10ppm (20, 15, 10 = 0°C to 70°C Only)
Output Voltage Logic High (Voh)	w/TTL Load w/HCMOS Load	2.4Vdc Minimum Vdd -0.5Vdc Minimum
Output Voltage Logic Low (Vol)	w/TTL Load w/HCMOS Load	0.4Vdc Maximum 0.5Vdc Maximum
Rise Time / Fall Time	0.4Vdc to 2.4Vdc w/TTL Load; 20% to 80% of Waveform w/HCMOS Load	3nSeconds Maximum
Duty Cycle	@1.4Vdc w/TTL Load; @50% w/HCMOS Load @1.4Vdc w/TTL Load or w/15pF HCMOS Load	50 ±10% (Standard) 50±5% (Optional)
Load Drive Capability		10TTL or 50pF HCMOS Load
Pin 1 Tristate Input Voltage	No Connection VIH VIL	Enables Output +2.4Vdc Minimum to Enable Output +0.8Vdc Maximum to Disable Output
Aging (@ 25°C)		±5ppm / year Maximum
Start Up Time		10mSeconds Maximum
Absolute Clock Jitter		±200pSeconds Maximum
One Sigma Clock Jitter		±50pSeconds Maximum

MECHANICAL DIMENSIONS

Marking Guide on page F3-F4

 14 Pin Full Size All Dimensions in mm.		 8 Pin Half Size All Dimensions in mm.	
Pin 1: No Connect or Tri-State Pin 7: Case Ground	Pin 8: Output Pin 14: Supply Voltage	Pin 1: No Connect or Tri-State Pin 4: Case Ground	Pin 5: Output Pin 8: Supply Voltage