

PA847C04 (40A)

(45V / 40A)

Schottky barrier diode

■ Major characteristics

Characteristics	PA847C04	Units	Condition
V _{RRM}	45	V	
V _F	0.38	V	T _j =125°C, typ
I _O	40	A	

■ Features

- Low V_F
- Optimized for 3.3V
- 5V output application
- Center tap connection

■ Applications

- High frequency operation
- DC-DC converters
- AC adapter

Maximum ratings and characteristics

- Absolute maximum ratings

Item	Symbol	Conditions	Rating	Unit
Repetitive peak surge reverse voltage	V_{RSM}	tw=500ns, duty=1/40	45	V
Repetitive peak reverse voltage	V_{RRM}		45	V
Average output current	I_o	Square wave, duty=1/2 Tc=102°C	40 *	A
Non-repetitive surge current	I_{FSM}	Sine wave 10ms, 1shot	250	A
Operating junction temperature	T_j		+150	°C
Storage temperature	T_{stg}		-40 to +150	°C

* Average output current at centertap full wave connection


- Electrical characteristics (Tc=25°C Unless otherwise specified)

Item	Symbol	Conditions	Max.	Unit
Forward voltage drop	V_F	$I_{FM}=16A$	0.55	V
Reverse current	I_R	$V_R=V_{RRM}$	8.0	mA


- Electrical characteristics (Tc=25°C Unless otherwise specified)

Item	Symbol	Condition	Max.	Unit
Thermal resistance	Rth(j-c)	Junction to case	1.2	°C/W

■ Outline drawings, mm

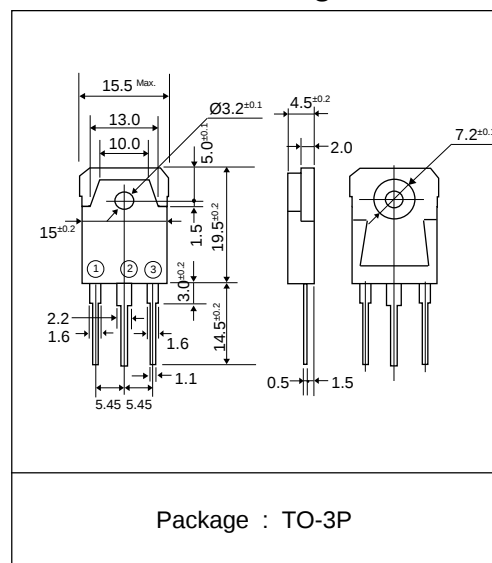


■ Connection diagram

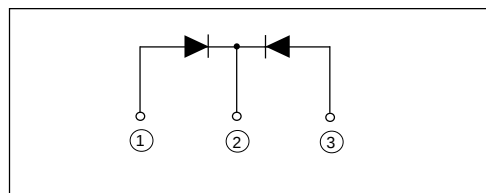


Characteristics


Forward Characteristic (typ.)

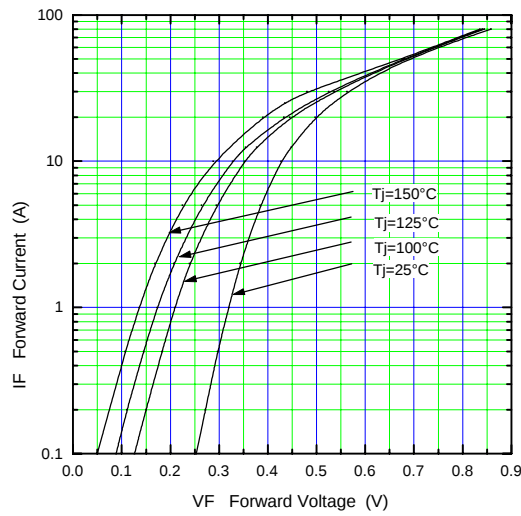



Reverse Characteristic (typ.)

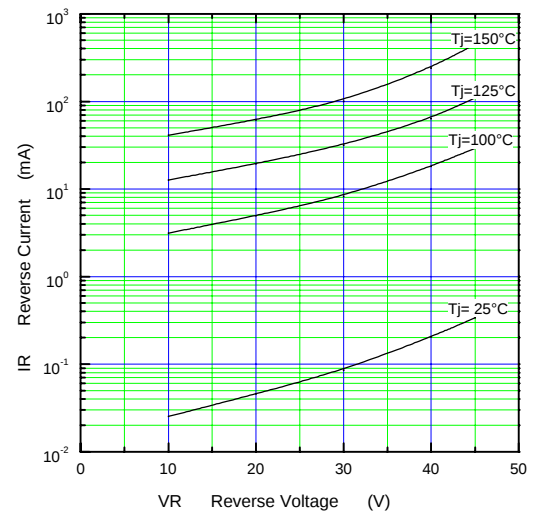

Forward Power Dissipation

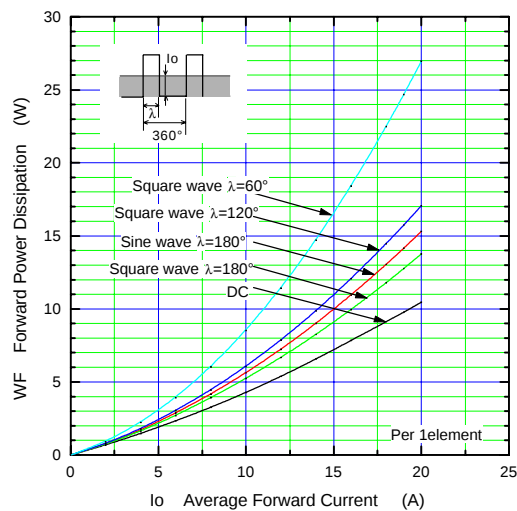

Reverse Power Dissipation

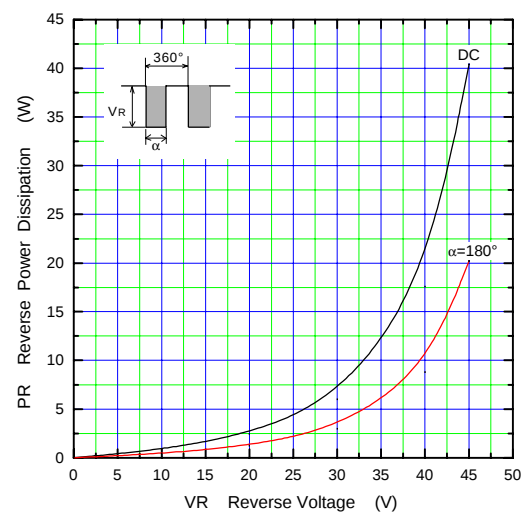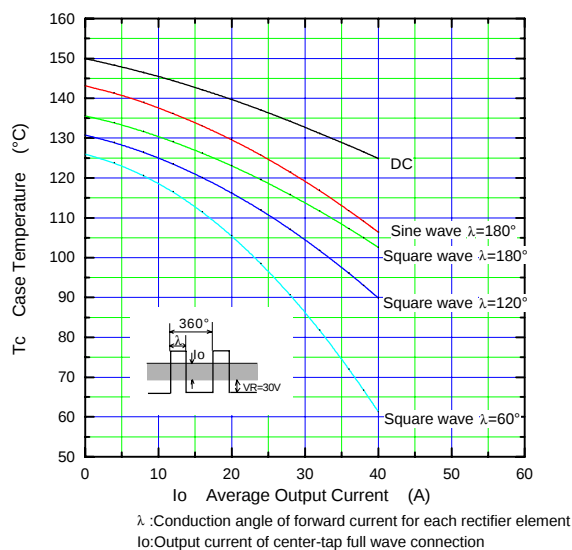Current Derating (I_o - T_c)

Junction Capacitance Characteristic (typ.)

