

GTC9922E**N-CHANNEL ENHANCEMENT MODE POWER MOSFET**



BVDSS	20V
RDS(ON)	15mΩ
ID	6.8A

Description

The GTC9922E provides the designer with the best combination of fast switching, ruggedized device design, ultra low on-resistance and cost-effectiveness.

Features

- *Low on-resistance
- *Capable of 2.5V gate drive
- *Optimal DC/DC battery application
- *Surface mount package

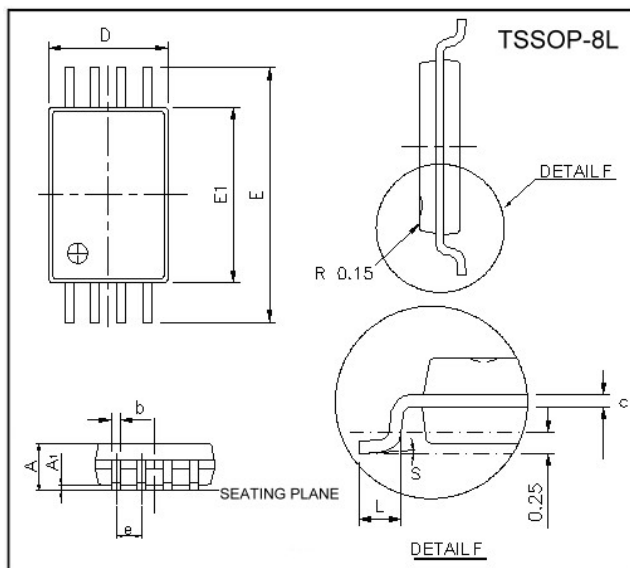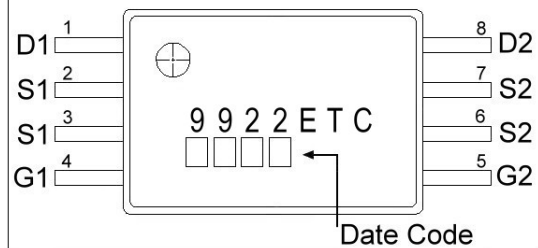Package Dimensions**Marking :**

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	-	1.20	E	6.20	6.60
A1	0.05	0.15	E1	4.30	4.50
b	0.19	0.30	e	0.65 BSC	
c	0.09	0.20	L	0.45	0.75
D	2.90	3.10	S	0°	8°

Absolute Maximum Ratings

Parameter	Symbol	Ratings	Unit
Drain-Source Voltage	V_{DS}	20	V
Gate-Source Voltage	V_{GS}	± 12	V
Continuous Drain Current ³ , $V_{GS}@4.5V$	$I_D @TA=25^{\circ}C$	6.8	A
Continuous Drain Current ³ , $V_{GS}@4.5V$	$I_D @TA=70^{\circ}C$	5.4	A
Pulsed Drain Current ¹	I_{DM}	25	A
Total Power Dissipation	$P_D @TA=25^{\circ}C$	1	W
Linear Derating Factor		0.008	W/ $^{\circ}C$
Operating Junction and Storage Temperature Range	T_j, T_{stg}	-55 ~ +150	$^{\circ}C$

Thermal Data

Parameter	Symbol	Value	Unit
Thermal Resistance Junction-ambient ³ Max.	R_{thj-a}	125	$^{\circ}C/W$

Electrical Characteristics (T_j = 25°C unless otherwise specified)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Drain-Source Breakdown Voltage	BV _{DSS}	20	-	-	V	V _{GS} =0, I _D =250uA
Breakdown Voltage Temperature Coefficient	$\Delta BV_{DSS} / \Delta T_j$	-	0.05	-	V/°C	Reference to 25°C, I _D =1mA
Gate Threshold Voltage	V _{GS(th)}	0.5	-	1.2	V	V _{DS} =V _{GS} , I _D =1mA
Forward Transconductance	g _{fs}	-	22	-	S	V _{DS} =4.5V, I _D =6A
Gate-Source Leakage Current	I _{GSS}	-	-	±10	uA	V _{GS} = ±12V
Drain-Source Leakage Current(T _j =25°C)	I _{DSS}	-	-	10	uA	V _{DS} =20V, V _{GS} =0
Drain-Source Leakage Current(T _j =70°C)		-	-	100	uA	V _{DS} =16V, V _{GS} =0
Static Drain-Source On-Resistance ²	R _{DS(ON)}	-	-	15	mΩ	V _{GS} =4.5V, I _D =6A
		-	-	20		V _{GS} =2.5V, I _D =4A
Total Gate Charge ²	Q _g	-	25	40	nC	I _D =6A
Gate-Source Charge	Q _{gs}	-	3	-		V _{DS} =16V
Gate-Drain ("Miller") Change	Q _{gd}	-	9	-		V _{GS} =4.5V
Turn-on Delay Time ²	T _{d(on)}	-	11	-	ns	V _{DS} =15V
Rise Time	T _r	-	12	-		I _D =1A
Turn-off Delay Time	T _{d(off)}	-	47	-		V _{GS} =4.5V
Fall Time	T _f	-	23	-		R _G =3.3Ω R _D =15Ω
Input Capacitance	C _{iss}	-	1730	2770	pF	V _{GS} =0V
Output Capacitance	C _{oss}	-	280	-		V _{DS} =20V
Reverse Transfer Capacitance	C _{rss}	-	240	-		f=1.0MHz
Gate Resistance	R _g	-	2.2	-	Ω	f=1.0MHz

Source-Drain Diode

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Forward On Voltage ²	V _{SD}	-	-	1.2	V	I _S =0.84A, V _{GS} =0V
Reverse Recovery Time ²	T _{rr}	-	24	-	ns	I _S =6A, V _{GS} =0V dI/dt=100A/μs
Reverse Recovery Charge	Q _{rr}	-	18	-	nC	

Notes: 1. Pulse width limited by Max. junction temperature.

2. Pulse width ≤ 300us, duty cycle ≤ 2%.

3. Surface mounted on 1 in² copper pad of FR4 board; 208°C/W when mounted on Min. copper pad.

Characteristics Curve

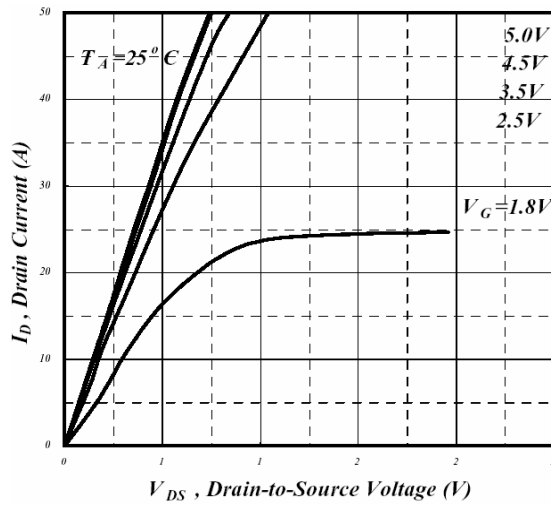


Fig 1. Typical Output Characteristics

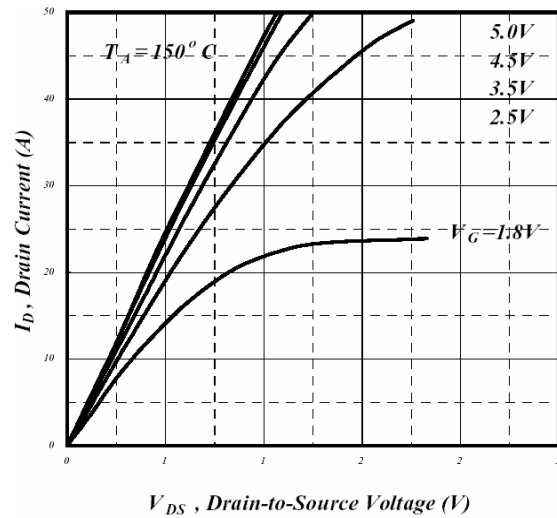


Fig 2. Typical Output Characteristics

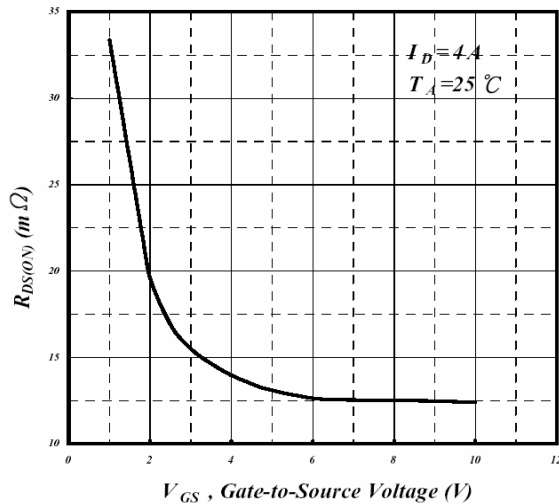


Fig 3. On-Resistance v.s. Gate Voltage

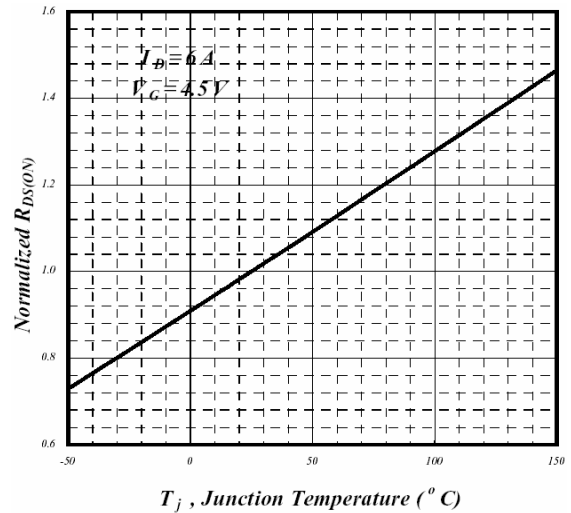


Fig 4. Normalized On-Resistance v.s. Junction Temperature

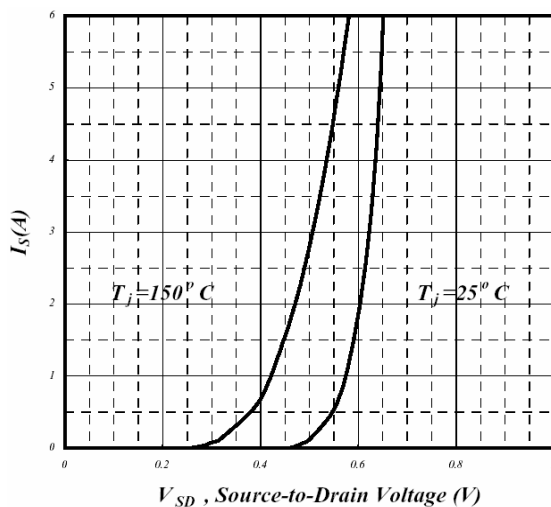


Fig 5. Forward Characteristics of Reverse Diode

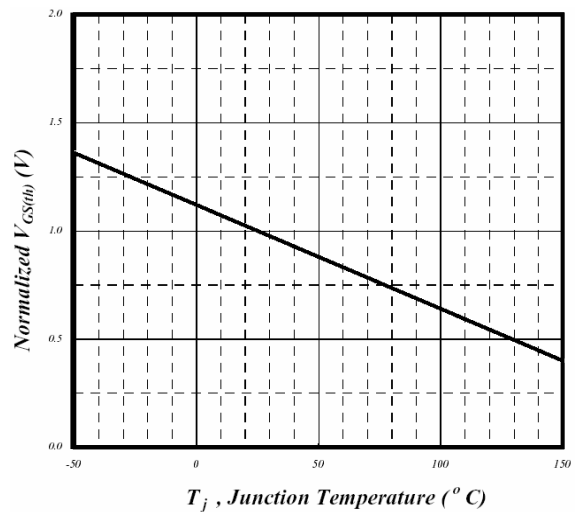


Fig 6. Gate Threshold Voltage v.s. Junction Temperature

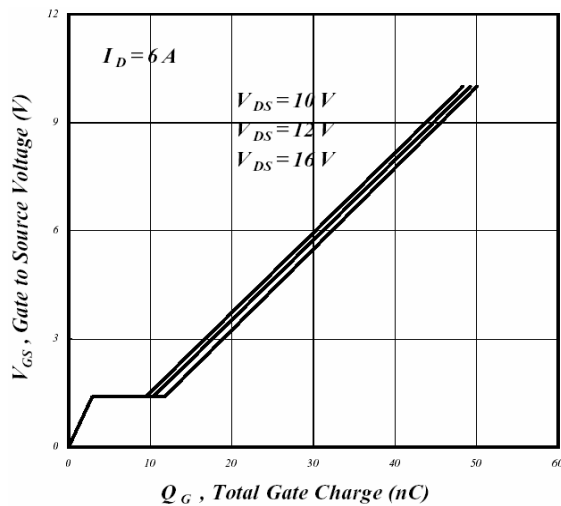


Fig 7. Gate Charge Characteristics

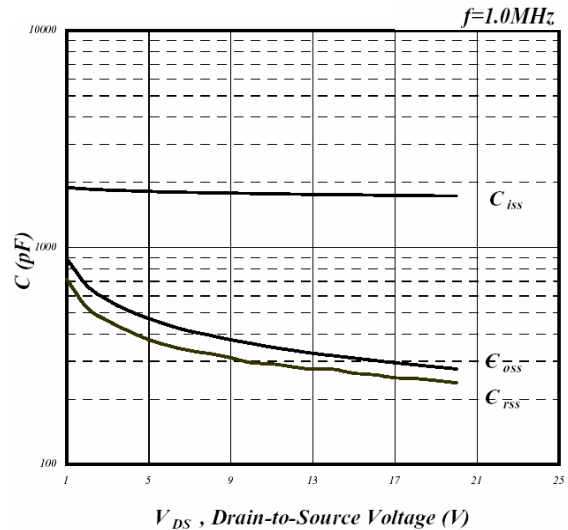


Fig 8. Typical Capacitance Characteristics

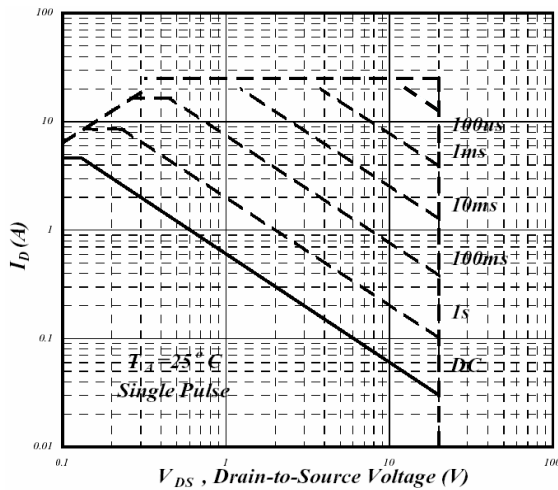


Fig 9. Maximum Safe Operating Area

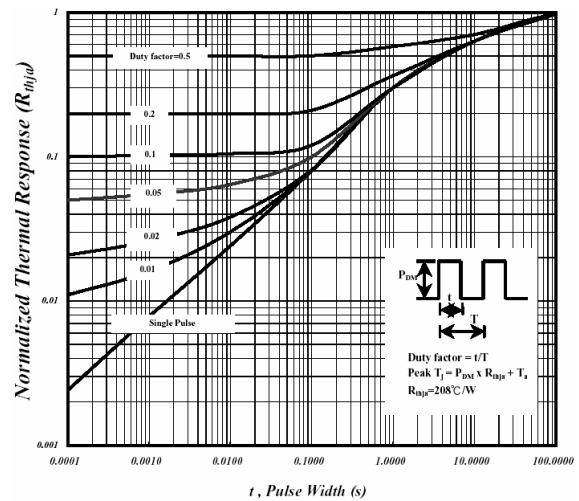


Fig 10. Effective Transient Thermal Impedance



Fig 11. Switching Time Waveform

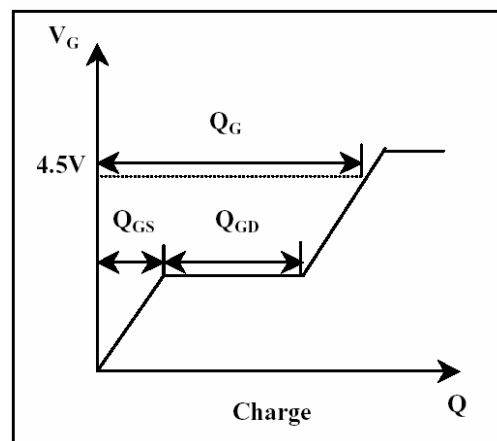


Fig 12. Gate Charge Waveform

Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of GTM.
- GTM reserves the right to make changes to its products without notice.
- GTM semiconductor products are not warranted to be suitable for use in life-support Applications, or systems.
- GTM assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.

Head Office And Factory:

- **Taiwan:** No. 17-1 Tatung Rd. Fu Kou Hsin-Chu Industrial Park, Hsin-Chu, Taiwan, R. O. C.
TEL : 886-3-597-7061 FAX : 886-3-597-9220, 597-0785
- **China:** (201203) No.255, Jang-Jiang Tsai-Lueng RD. , Pu-Dung-Hsin District, Shang-Hai City, China
TEL : 86-21-5895-7671 ~ 4 FAX : 86-21-38950165