


Si APD S4402

φ1 mm quadrant APD

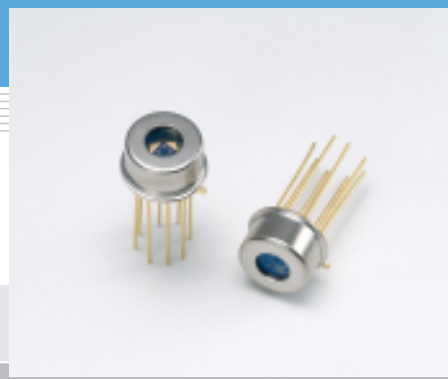

Features

- Uniform element characteristics
Quadrant format on one chip with φ1 mm active area ensures uniform characteristics between elements.
- Single power supply operation
Allows easy and simple operation.

Applications

- Low-light-level detection
- Laser beam positioning

General ratings

Parameter	Symbol	Value	Unit
Window material	-	Borosilicate glass	-
Active area size	A	φ1 mm/4	mm
Effective active area	-	0.17 (per 1 element)	mm ²


Absolute maximum ratings

Parameter	Symbol	Value	Unit
Operating temperature	T _{opr}	-20 to +60	°C
Storage temperature	T _{stg}	-55 to +100	°C


Electrical and optical characteristics (T_a=25 °C)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Spectral response range	λ		-	400 to 1000	-	nm
Peak sensitivity wavelength	λ _p	M=100	-	800	-	nm
Photo sensitivity	S	λ=800 nm, M=1	-	0.5	-	A/W
Quantum efficiency	QE	λ=800 nm, M=1	-	75	-	%
Breakdown voltage	V _{BR}	I _R =100 μA	-	150	200	V
Temperature coefficient of V _{BR}	-			0.65	-	V/°C
Dark current	I _D	M=100	-	0.4	2.0	nA
Cut-off frequency	f _c	M=100, λ=800 nm R _L =50 Ω, -3 dB	-	310	-	MHz
Terminal capacitance	C _t	M=100, f=1 MHz	-	8	-	pF
Excess noise figure	x	M=50, f=10 kHz I _o =10 nA	-	0.35	-	-


■ Spectral response

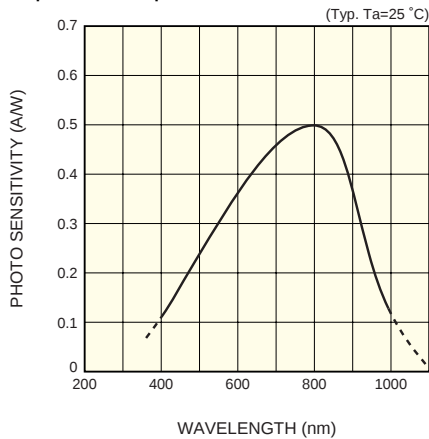


■ Dark current vs. reverse voltage

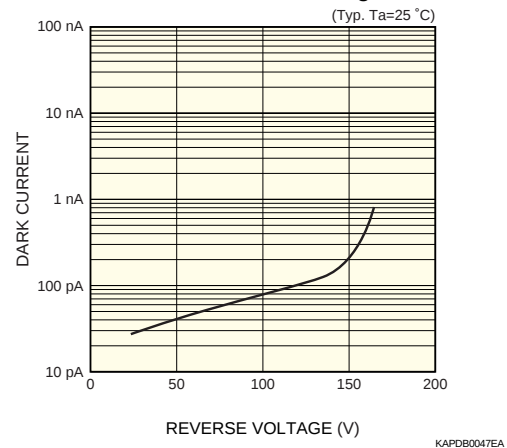


■ Terminal capacitance vs. reverse voltage

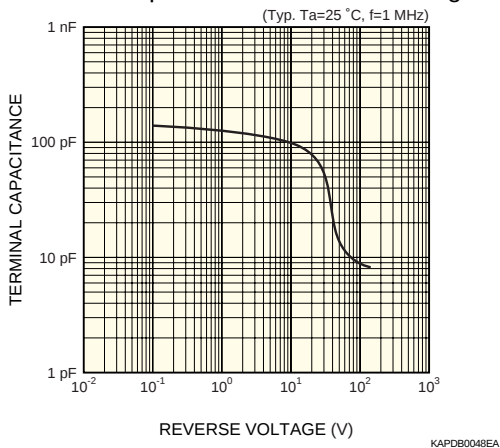


■ Gain vs. reverse voltage

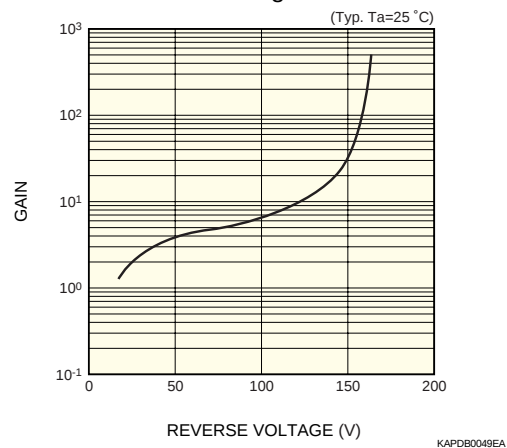

■ Cross-talk example

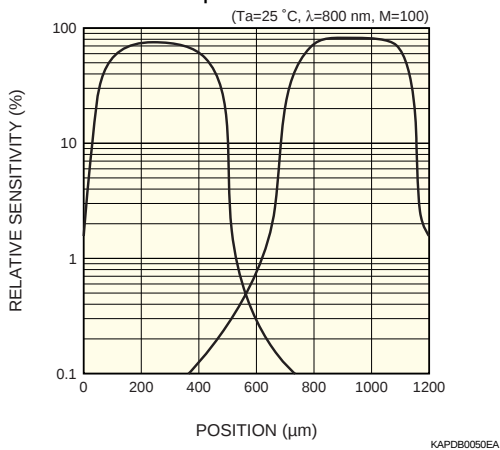

■ Dimensional outline (unit: mm)

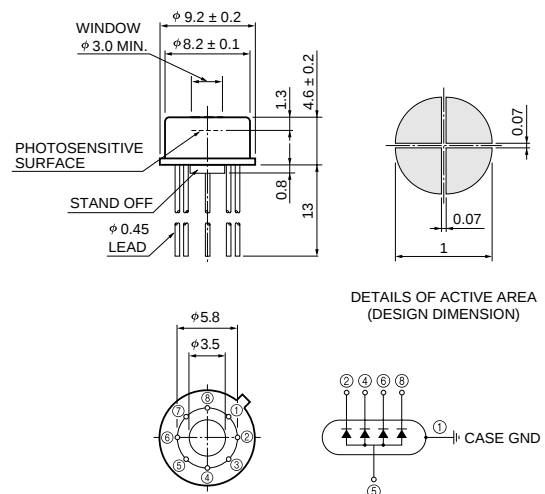

KAPDA0021EA

HAMAMATSU

Information furnished by HAMAMATSU is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions. Specifications are subject to change without notice. No patent rights are granted to any of the circuits described herein. ©2005 Hamamatsu Photonics K.K.

HAMAMATSU PHOTONICS K.K., Solid State Division

1126-1 Ichino-cho, Higashi-ku, Hamamatsu City, 435-8558 Japan, Telephone: (81) 53-434-3311, Fax: (81) 53-434-5184, <http://www.hamamatsu.com>

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, P.O.Box 6910, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1) 908-231-0960, Fax: (1) 908-231-1218

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49) 08152-3750, Fax: (49) 08152-2658

France: Hamamatsu Photonics France S.A.R.L.: 19, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: 33-(1) 69 53 71 00, Fax: 33-(1) 69 53 71 10

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44) 1707-294888, Fax: (44) 1707-325777

North Europe: Hamamatsu Photonics Norden AB: Smidesvägen 12, SE-171 41 Solna, Sweden, Telephone: (46) 8-509-031-00, Fax: (46) 8-509-031-01

Italy: Hamamatsu Photonics Italia S.R.L.: Strada della Moia, 1/E, 20020 Arese, (Milano), Italy, Telephone: (39) 02-935-81-733, Fax: (39) 02-935-81-741

Cat. No. KAPD1002E02
Mar. 2005 DN