

XO5161 Series






14 pin DIP, 12.0 Volt, HCMOS/TTL, OCXO



- Standard DIP/DIL package (20.3 x 13.2 x 7.6 mm) offering tight stabilities, fast warm-up, and low current
- Ideal for PCS base stations, cellular base stations, phase locking, and SAR/SAT applications

Ordering Information

	XO5161	A	R1	-R	00.0000 MHz
Product Series					
Stability/ Temperature					
A:	±0.05 ppm, 0°C to +60°C				
B:	±0.10 ppm, -20°C to +70°C				
C:	±0.20 ppm, -40°C to +85°C				
Frequency Adjustment Method:					
R1:	External Resistor Adjust (See Figure 1)				
V5:	Voltage Adjust (See Figure 2)				
RoHS Compliance					
Blank:	non-RoHS compliant part				
-R:	RoHS compliant part				
Frequency (Customer Specified)					

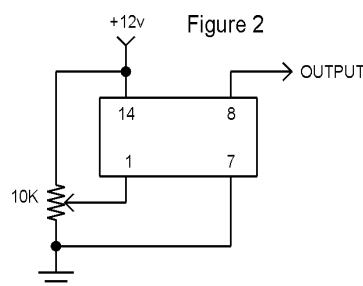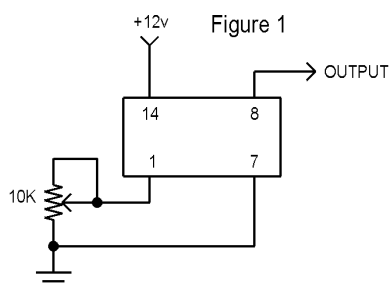

PARAMETER	Symbol	Min.	Max.	Units	Condition
Frequency Range	F	10	20	MHz	
Operating Temperature	T _A	(See Ordering Information)		°C	
Stability Over Temperature	ΔF/F	(See Ordering Information)		ppm	
Short Term Stability			5 x 10 ⁻¹¹		0.1 to 30 secs.
Aging (First Year)			±0.7	ppm	
Aging (10 Years)			±4.0	ppm	
Frequency Vs. Supply			±0.1	ppm	
Frequency Vs. Load			±0.01	ppm	
Supply Voltage	V _{cc}	+11.5	+12.5	Volts	
Warm-Up Time		To spec after 30 secs.			0°C
Warm-Up Current			250	mA	After 10 secs.
Supply Current	I _{cc}		25	mA	+30°C
			40	mA	-20°C
Output Signal		HCMOS/TTL Compatible			
Rise/Fall Time	Tr/Tf		7	ns	Ref. 10% and 90%
Logic "0" Level	V _{ol}		0.4	Volts	
Logic "1" Level	V _{oh}	V _{cc} - 0.5		Volts	
Symmetry	Sym		40/60	%	Ref. To 1/2 V _{cc}
Output Load			15 pF HCMOS 10 LS TTL		
Frequency Adjustment (Pin 1)		±4		ppm	See Figure 1 or 2
Tuning Slope		Positive			
Input Impedance (Pin 1)		4.7K		ohms	
Phase Noise					(BW = 1 Hz) Offset from carrier
1 Hz			-60	dBc/Hz	
10 Hz			-90	dBc/Hz	
100 Hz			-120	dBc/Hz	
1 kHz			-130	dBc/Hz	
Mechanical Shock	2000 g, 0.3 mS, 1/2 sine				
Vibration	2000 Hz, 10 g				
Storage Temperature	-55°C to +125°C				
Hermeticity	Per MIL-STD-202, Method 112				
Solderability	EIAJ-STD-002				

Pin Connections

PIN	FUNCTION
1	Frequency Adjust
7	Case ground & supply return
8	R.F. Output
14	Supply (+)

MtronPTI reserves the right to make changes to the product(s) and service(s) described herein without notice. No liability is assumed as a result of their use or application.

Please see www.mtronpti.com for our complete offering and detailed datasheets. Contact us for your application specific requirements: MtronPTI 1-800-762-8800.