

SMT06C Series

5 Vin and 12 Vin single output

NEW Product



- **6 A current rating**
- **Input voltage range: 4.5 Vdc to 5.5 Vdc or 10.2 Vdc to 13.8 Vdc**
- **Output voltage range: 0.9 Vdc to 3.3/5.0 Vdc**
- **Industry leading value**
 - Cost optimized design
- **Excellent transient response**
- **Output voltage adjustability**
 - Pathway for future upgrades
 - Supports silicon voltage migration
 - Resulting in reduced design-in and qualification time
- **Designed in reliability: MTBF of >7 million hours per Telcordia SR-332**
- **Available RoHS compliant**



The SMT06C series is a new high density open-frame, non-isolated converter for space sensitive applications. Each model has a wide input range (4.5 Vdc to 5.5 Vdc or 10.2 Vdc to 13.8 Vdc) and offers a wide 0.9 Vdc to 5.0 Vdc output voltage range with a 6 A load. An external resistor adjusts the output voltage from its pre-set value of 0.9 V to any value up to the 5 V maximum. Typical efficiencies for the models are 89% for the 5 V input version and 91% for the 12 V input version. The series offers remote ON/OFF and overcurrent protection as standard. With full international safety approvals including EN60950 and UL/cUL60950, the SMT06C reduces compliance costs and time to market.



2 YEAR WARRANTY

All specifications are typical at nominal input Vin = 12 V, full load at 25 °C unless otherwise stated

SPECIFICATIONS

OUTPUT SPECIFICATIONS

Voltage adjustability (See Note 6)	5 Vin 12 Vin	0.9-3.3 Vdc 0.9-5.0 Vdc
Output setpoint accuracy	1.0% trim resistors	±2.5%
Line regulation	Low line to high line	±0.2%
Load regulation	Full load to min. load	±0.5%
Min/max load		0 A/6 A
Overshoot (at turn-on)	5 Vin 12 Vin	3.0% max. 1.0% max.
Undershoot	At turn-off	100 mV max.
Ripple and noise 5 Hz to 20 MHz	(See Note 2)	See Table on page 2
Transient response (See Note 1)		75 mV max. deviation 150 µs recovery to within regulation band

INPUT SPECIFICATIONS

Input voltage range	5 Vin 12 Vin	4.5-5.5 Vdc 10.2-3.8 Vdc
Input current	Min load Remote OFF	50 mA 5mA
Input current (max.) (See Note 8)	5 Vin 12 Vin	5.1 A max. @ Io max. 1.6 A @ Io max.
Input reflected ripple (See Note 2)	5 Vin 12 Vin	52 mA (pk-pk) 56 mA (pk-pk)
Remote ON/OFF Logic compatibility ON OFF		Positive logic >2.4 Vdc <0.8 Vdc
Start-up time (See Note 3)	Power-up Remote ON/OFF	<20 ms <20 ms

INPUT SPECIFICATIONS (CONTD.)

Turn ON threshold	5 Vin 12 Vin	4.5 Vdc typ. 9.3 Vdc typ.
Turn OFF threshold	5 Vin 12 Vin	4.3 Vdc typ. 7.8 Vdc typ.

GENERAL SPECIFICATIONS

Efficiency	See Table on page 2	
Switching frequency	Fixed	200 kHz
Approvals and standards	(See Note 4)	TÜV Product Services IEC60950, UL/cUL60950
Material flammability	UL94V-0	
Weight	9.3 g (0.3 oz)	
Coplanarity	150 µm	
MTBF	Telcordia SR-332	7,562,142 hours

ENVIRONMENTAL SPECIFICATIONS

Thermal performance (See Note 9)	Operating ambient, temperature Non-operating	0 °C to +80 °C -40 °C to +125 °C
-------------------------------------	--	-------------------------------------

PROTECTION

Short-circuit	Hiccup, non-latching
---------------	----------------------

RECOMMENDED SYSTEM CAPACITANCE

Input capacitance	(See Note 10)	270 µF/20 mΩ ESR max.
Output capacitance	(See Note 10)	680 µF/10 mΩ ESR max.

SMT06C Series

5 Vin and 12 Vin single output

DC-DC CONVERTERS C Class Non-isolated


2

For the most current data and application support visit www.artesyn.com/powergroup/products.htm

NEW Product

OUTPUT POWER (MAX.)	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT (MIN.)	OUTPUT CURRENT (MAX.)	EFFICIENCY (TYP.)	REGULATION		MODEL NUMBER ^(11,12)
						LINE	LOAD	
20 W	4.5-5.5 Vdc	0.9-3.3 Vdc	0 A	6 A	89%	±0.2%	±0.5%	SMT06C-05SADJJ
30 W	10.2-13.8 Vdc	0.9-5.0 Vdc	0 A	6 A	91%	±0.2%	±0.5%	SMT06C-12SADJJ

Part Number System with Options

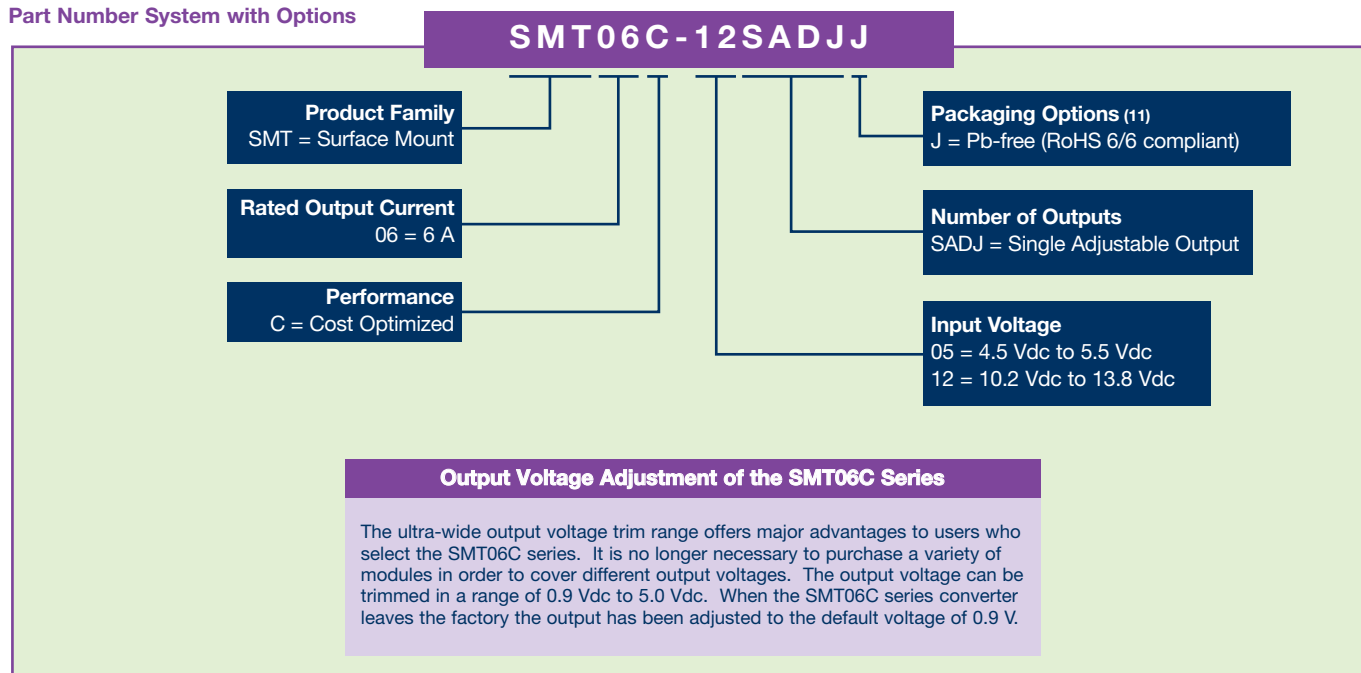

Notes

- 1 $di/dt = 10 \text{ A}/\mu\text{s}$, $V_{in} = \text{Nom}$, $T_c = 25^\circ\text{C}$, load change = 0.50 I_o max. to 0.75 I_o max. and 0.75 I_o max. to 0.5 I_o max.
- 2 Measured with external filter. See Application Note 169 for details.
- 3 Power up is the time from application of dc input to Power Good high. Remote ON/OFF asserted high to Power Good high.
- 4 This product is only for inclusion by professional installers within other equipment and must not be operated as a stand alone product.
- 5 Measured as per recommended set-up. $C_{in} = 270 \mu\text{F}$ (20 mΩ ESR max.). $C_{out} = 680 \mu\text{F}$ (10 mΩ ESR max.).
- 6 Uses external resistor from trim to ground. Minimum value 485 Ω for 5 V model, 280 Ω for 12 V model. See Application Note 169 for details.
- 7 Signal line assumed <3 m.
- 8 External input fusing recommended.
- 9 See Application Note 169 for operation above 50 °C.
- 10 See Application Note 169 for more details.
- 11 TSE RoHS 5/6 (non Pb-free) compliant versions may be available on special request, please contact your local sales representative for details.
- 12 NOTICE: Some models do not support all options. Please contact your local Artesyn representative or use the on-line model number search tool at <http://www.artesyn.com/powergroup/products.htm> to find a suitable alternative.

Ripple and Noise Specification

Model	Output Voltage	Pk - Pk	RMS
5 V input models	0.9 Vdc to 2.5 Vdc	30 mV	15 mV
	3.3 Vdc	40 mV	15 mV
12 V input models	0.9 Vdc to 2.5 Vdc	40 mV	20 mV
	3.3 Vdc to 5 Vdc	50 mV	20 mV

International Safety Standard Approvals



UL/cUL CAN/CSA 22.2 No. 60950
UL 60950 File No. E139421




TÜV Product Service (EN60950:2000)
Certificate No. B 04 08 19870 228
CB report and certificate to US/6415C/UL

5 Vin and 12 Vin single output

DC-DC CONVERTERS	C Class Non-isolated
------------------	----------------------

3

For the most current data and application support visit www.artesyn.com/powergroup/products.htm

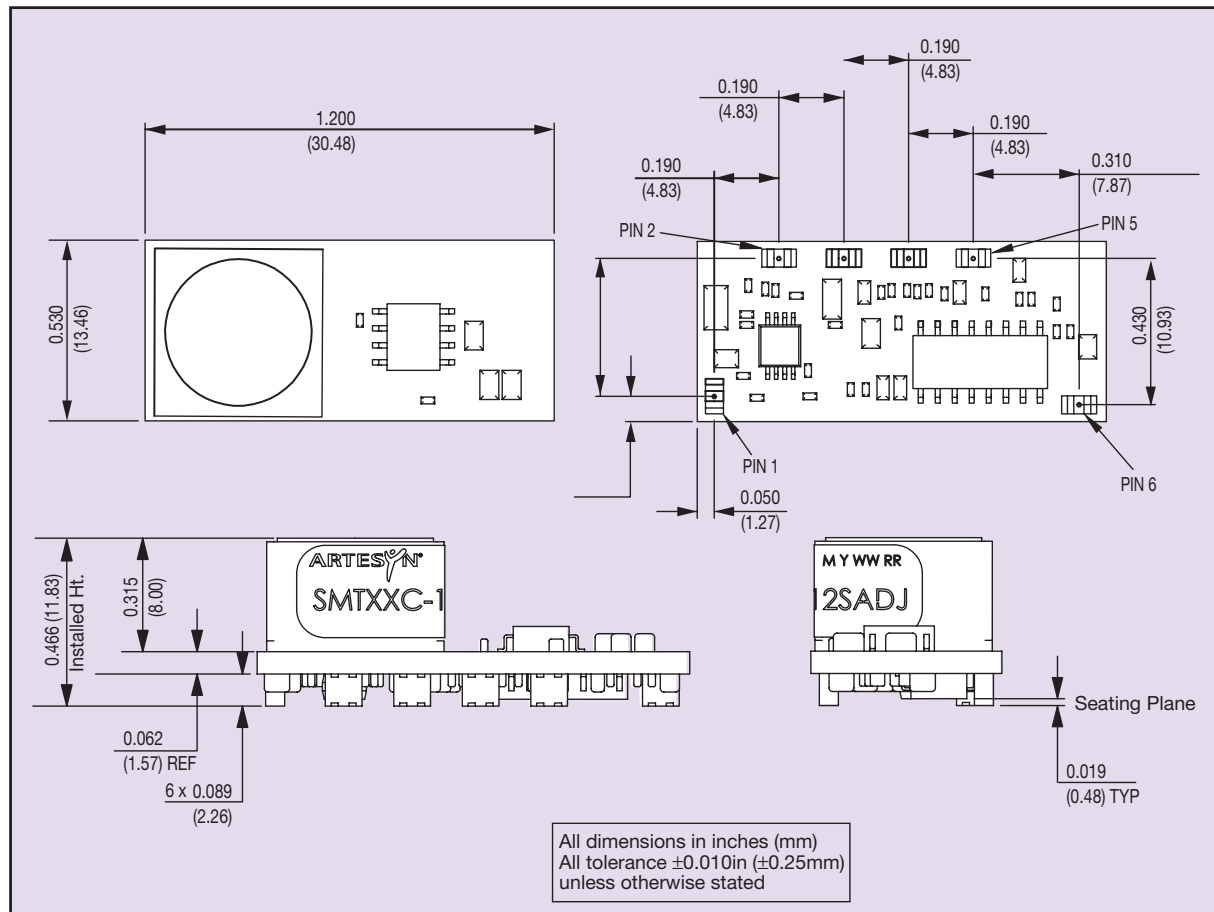NEW Product

PIN CONNECTIONS	
PIN NUMBER	FUNCTION
1	Remote ON/OFF
2	Power Good
3	Trim
4	Vout
5	GND
6	Vin

Datasheet © Artesyn Technologies® 2005

The information and specifications contained in this datasheet are believed to be correct at time of publication. However, Artesyn Technologies accepts no responsibility for consequences arising from printing errors or inaccuracies. Specifications are subject to change without notice. No rights under any patent accompany the sale of any such product(s) or information contained herein.

Please consult our website for the following items: ✓ Application Note ✓ Longform Datasheet

www.artesyn.com

File Name: smt06c.pdf Rev (03): 15 Dec 2005