

UF200 ~ UF2010

ULTRAFAST SWITCHING RECTIFIER

VOLTAGE 50 to 1000 Volts **CURRENT** 2.0 Amperes

DO-15


Unit: inch(mm)

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O utilizing Flame Retardant Epoxy Molding Compound
- Exceeds environmental standards of MIL-S-19500/228.
- Ultra Fast switching for high efficiency.
- In compliance with EU RoHS 2002/95/EC directives

MECHANICAL DATA

- Case: Molded plastic, DO-15
- Terminals: Axial leads, solderable per MIL-STD-750, Method 2026
- Polarity: Band denotes cathode
- Mounting Position: Any
- Weight: 0.014 ounce, 0.397 gram

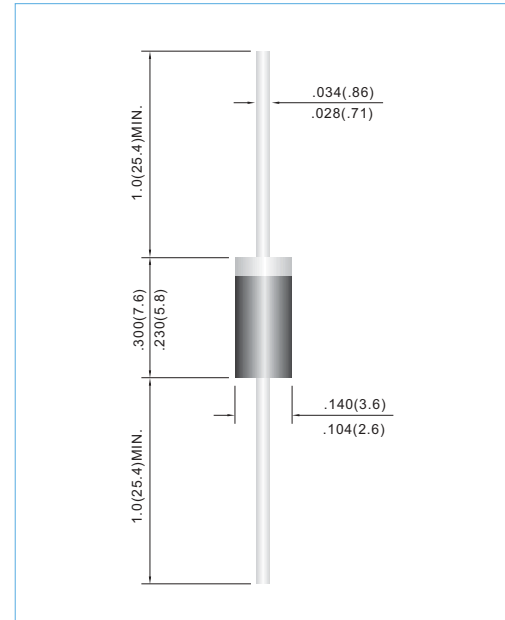

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. Resistive or inductive load, 60Hz.

PARAMETER	SYMBOL	UF200	UF201	UF202	UF204	UF206	UF208	UF2010	UNITS
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Current at T _A =55°C	I _{F(AV)}	2.0							A
Peak Forward Surge Current : 8.3ms single half sine-wave superimposed on rated load(JEDEC method)	I _{FSM}	60							A
Maximum Forward Voltage at 2.0A	V _F	1.0			1.3	1.7			V
Maximum DC Reverse Current at T _J =25°C Rated DC Blocking Voltage T _J =100°C	I _R	10.0 500							μA
Typical Junction capacitance (Note 1)	C _J	35							pF
Typical Thermal Resistance(Note 2)	R _{θJA}	40							°C / W
Maximum Reverse Recovery Time (Note 3)	t _{rr}	50				75			ns
Operating Junction and Storage Temperature Range	T _J ,T _{STG}	-55 to +150							°C

NOTES:

- Measured at 1 MHz and applied reverse voltage of 4.0 VDC.
- Thermal Resistance from Junction to Ambient and from Junction to lead length 0.375"(9.5mm) P.C.B. mounted.
- Reverse Recovery Time $I_F=.5\text{A}$, $I_R=1\text{A}$, $I_{rr}=.25\text{A}$

UF200 ~ UF2010

RATING AND CHARACTERISTIC CURVES

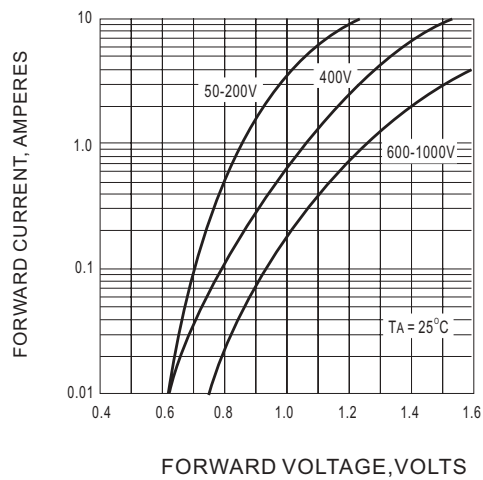


Fig.1 FORWARD CHARACTERISTICS

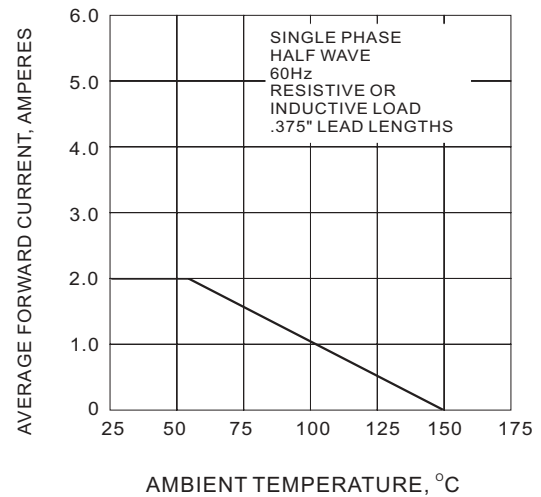


Fig.2 FORWARD CURRENT DERATING CURVE

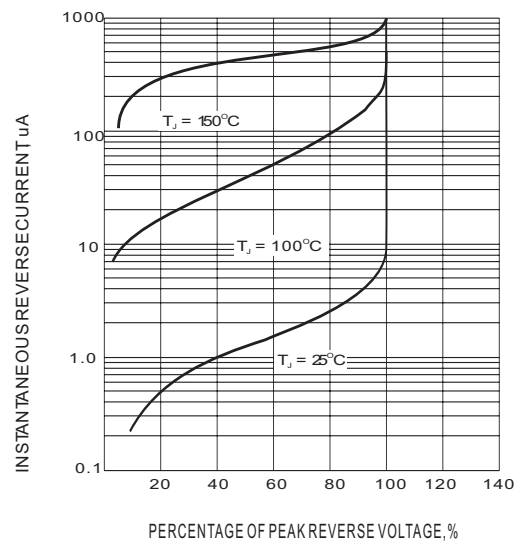


Fig.3 TYPICAL REVERSE CHARACTERISTIC

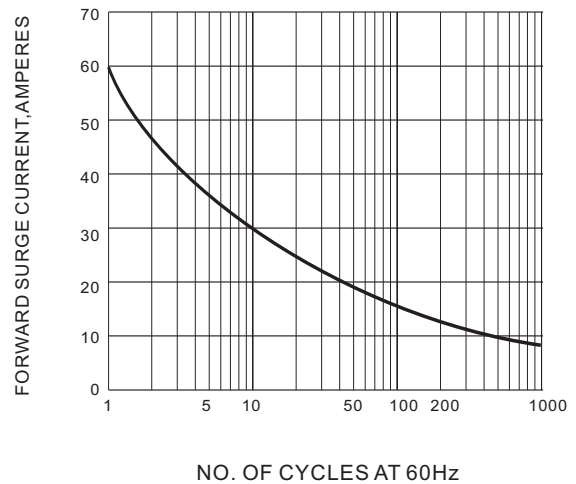


Fig.4 PEAK FORWARD SURGE CURRENT