


MITSUBISHI Nch POWER MOSFET

FS22SM-9

HIGH-SPEED SWITCHING USE


FS22SM-9

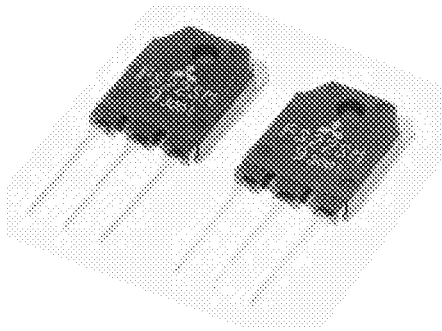

ˆ V _{DSS}	450V
ˆ r _{DS (ON)} (MAX)	0.24Ω
ˆ I _D	22A

OUTLINE DRAWING

Dimensions in mm

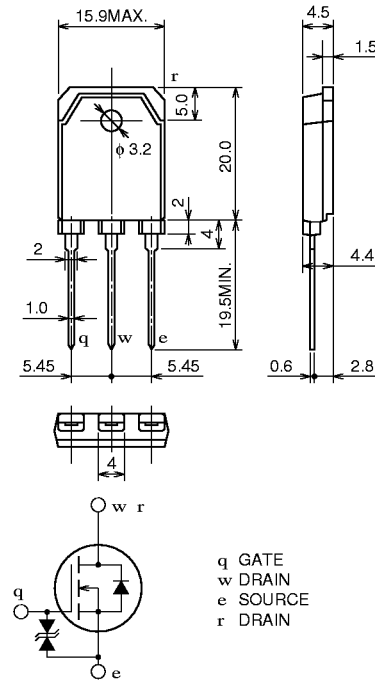

TO-3P

APPLICATION

SMPS, DC-DC Converter, battery charger, power supply of printer, copier, HDD, FDD, TV, VCR, personal computer etc.

MAXIMUM RATINGS (T_c = 25°C)





Symbol	Parameter	Conditions	Ratings	Unit
V _{DSS}	Drain-source voltage	V _{GS} = 0V	450	V
V _{GSS}	Gate-source voltage	V _{DS} = 0V	±30	V
I _D	Drain current		22	A
I _{DM}	Drain current (Pulsed)		66	A
P _D	Maximum power dissipation		275	W
T _{ch}	Channel temperature		-55 ~ +150	°C
T _{stg}	Storage temperature		-55 ~ +150	°C
—	Weight	Typical value	4.8	g

Feb.1999


ELECTRICAL CHARACTERISTICS (T_{ch} = 25°C)

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
V _{(BR) DSS}	Drain-source breakdown voltage	I _D = 1 mA, V _{GS} = 0 V	450	—	—	V
V _{(BR) GSS}	Gate-source breakdown voltage	I _G = ±100 μA, V _{DS} = 0 V	±30	—	—	V
I _{GSS}	Gate-source leakage current	V _{GS} = ±25 V, V _{DS} = 0 V	—	—	±10	μA
I _{DSS}	Drain-source leakage current	V _{DS} = 450 V, V _{GS} = 0 V	—	—	1	mA
V _{GS} (th)	Gate-source threshold voltage	I _D = 1 mA, V _{DS} = 10 V	2	3	4	V
r _{DS} (ON)	Drain-source on-state resistance	I _D = 11 A, V _{GS} = 10 V	—	0.19	0.24	Ω
V _{DS} (ON)	Drain-source on-state voltage	I _D = 11 A, V _{GS} = 10 V	—	2.1	2.6	V
y _{fs}	Forward transfer admittance	I _D = 11 A, V _{DS} = 10 V	7.0	10.0	—	S
C _{iss}	Input capacitance	V _{DS} = 25 V, V _{GS} = 0 V, f = 1 MHz	—	2800	—	pF
C _{oss}	Output capacitance		—	300	—	pF
C _{rss}	Reverse transfer capacitance		—	60	—	pF
t _d (on)	Turn-on delay time	V _{DD} = 200 V, I _D = 11 A, V _{GS} = 10 V, R _{GEN} = R _{GS} = 50 Ω	—	60	—	ns
t _r	Rise time		—	80	—	ns
t _d (off)	Turn-off delay time		—	270	—	ns
t _f	Fall time		—	80	—	ns
V _{SD}	Source-drain voltage	I _S = 11 A, V _{GS} = 0 V	—	1.5	2.0	V
R _{th} (ch-c)	Thermal resistance	Channel to case	—	—	0.45	°C/W


PERFORMANCE CURVES

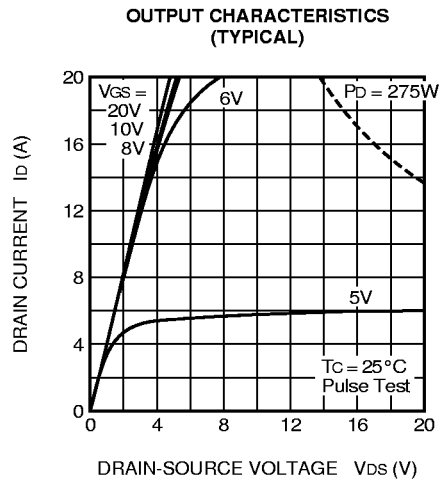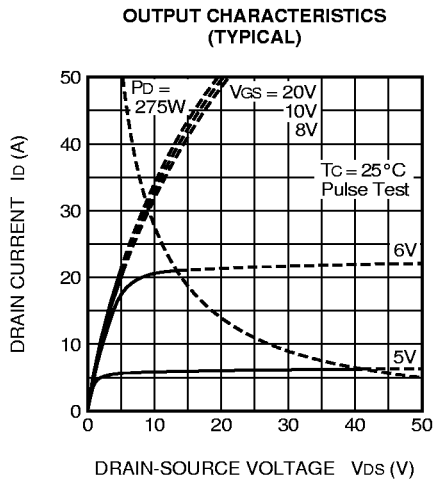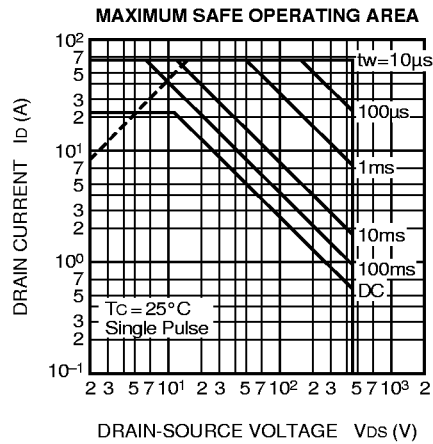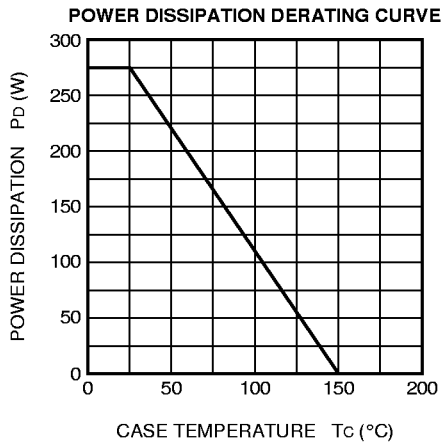


ON-STATE VOLTAGE VS.
GATE-SOURCE VOLTAGE
(TYPICAL)

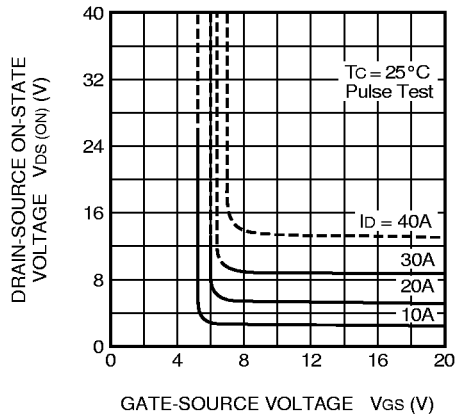


ON-STATE RESISTANCE VS.
DRAIN CURRENT
(TYPICAL)

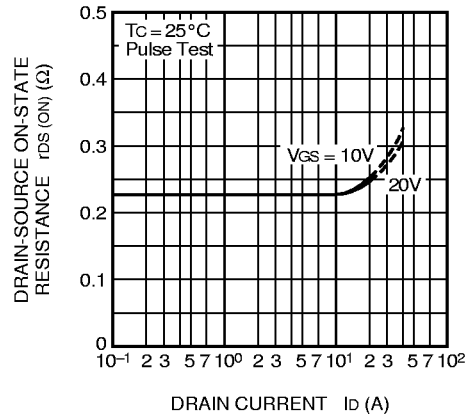


TRANSFER CHARACTERISTICS
(TYPICAL)

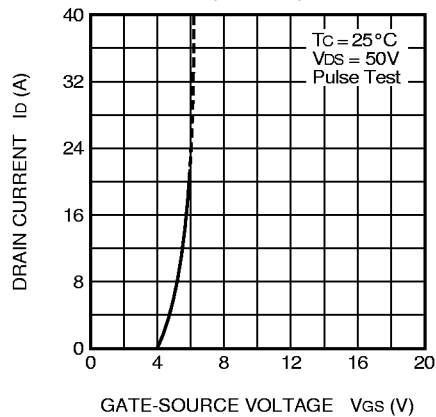

FORWARD TRANSFER ADMITTANCE
VS. DRAIN CURRENT
(TYPICAL)

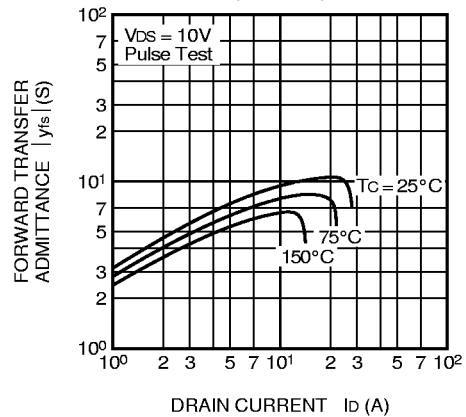

CAPACITANCE VS.
DRAIN-SOURCE VOLTAGE
(TYPICAL)

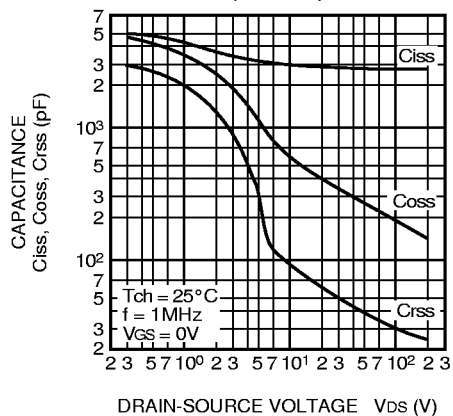

SWITCHING CHARACTERISTICS
(TYPICAL)

