


80 Amp Schottky OR'ing Rectifier FST8515

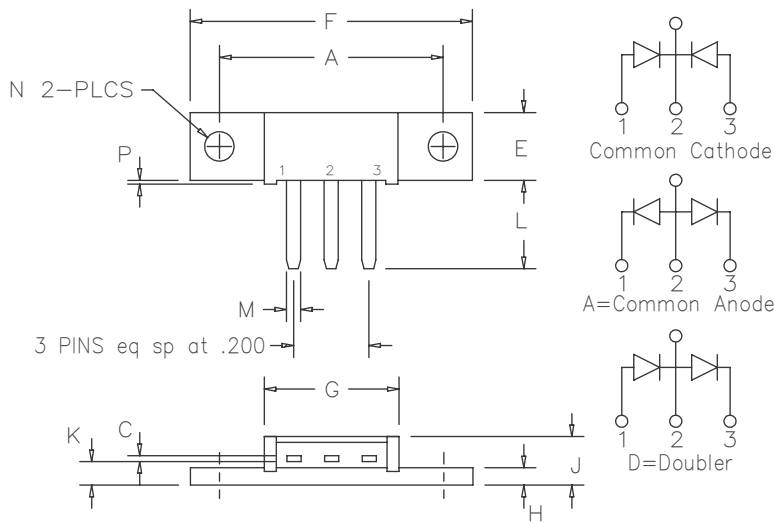

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	1.180	1.195	29.97	30.35	
C	.027	.037	0.69	0.94	
E	.350	.370	8.89	9.40	
F	1.490	1.510	37.85	38.35	
G	.695	.715	17.65	18.16	
H	.088	.098	2.24	2.49	
J	.240	.260	6.10	6.60	
K	.115	.135	2.92	3.43	
L	.460	.480	11.68	12.19	
M	.065	.085	1.65	2.16	
N	.151	.161	3.84	4.09	Dia.
P	.015	.025	0.38	0.64	

Note: Baseplate Common with Pin 2

Microsemi Catalog Number	Industry Part Number	Working Peak Reverse Voltage	Repetitive Peak Reverse Voltage
FST8515*	85CNQ015, A	15V	15V

*Add the Suffix A for Common Anode, D for Doubler

- Schottky Barrier Rectifier
- 0.28V Vf@40A per leg, 100°C
- Optimized for OR'ing applications
- Guard ring reverse protection
- 125°C Operation (Vr<5V)
- ROHS Compliant

Electrical Characteristics

Average forward current per pkg	IF(AV) 80 Amps	TC = 84°C, VR = 5V
Average forward current per pkg	IF(AV) 80 Amps	TC = 78°C, VR = 15V
Average forward current per leg	IF(AV) 40 Amps	TC = 84°C, VR = 5V
Average forward current per leg	IF(AV) 40 Amps	TC = 78°C, VR = 15V
Maximum surge current per leg	IFSM 800 Amps	8.3 ms, half sine, TJ = 100°C
Max repetitive peak reverse current	IR(OV) 2 Amps	f = 1 KHZ, 25°C, 1μsec square wave
Max peak forward voltage per leg	VFM 0.35 Volts	IFM = 40A: TJ = 25°C*
Max peak forward voltage per leg	VFM 0.28 Volts	IFM = 40A: TJ = 100°C*
Max peak reverse current per leg	IRM 750 mA	VR = 5V, TJ = 100°C*
Max peak reverse current per leg	IRM 1500 mA	VRRM, TJ = 100°C*
Max peak reverse current per leg	IRM 12 mA	VR = 5V, TJ = 25°C
Max peak reverse current per leg	IRM 20 mA	VRRM, TJ = 25°C
Typical junction capacitance per leg	CJ 5600 pF	VR = 5.0V, TJ = 25°C

*Pulse test: Pulse width 300μsec, Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range	TSTG	-55°C to 150°C
Operating junction temp range	TJ	-55°C to 125°C
Max thermal resistance per leg	RθJC	1.0°C/W Junction to case
Max thermal resistance per pkg	RθJC	0.5°C/W Junction to case
Typical thermal resistance (greased)	RθCS	0.3°C/W Case to sink
Mounting Base Torque		10 inch pounds maximum
Weight		0.3 ounce (8.4 grams) typical

FST8515

Figure 1
Typical Forward Characteristics – Per Leg

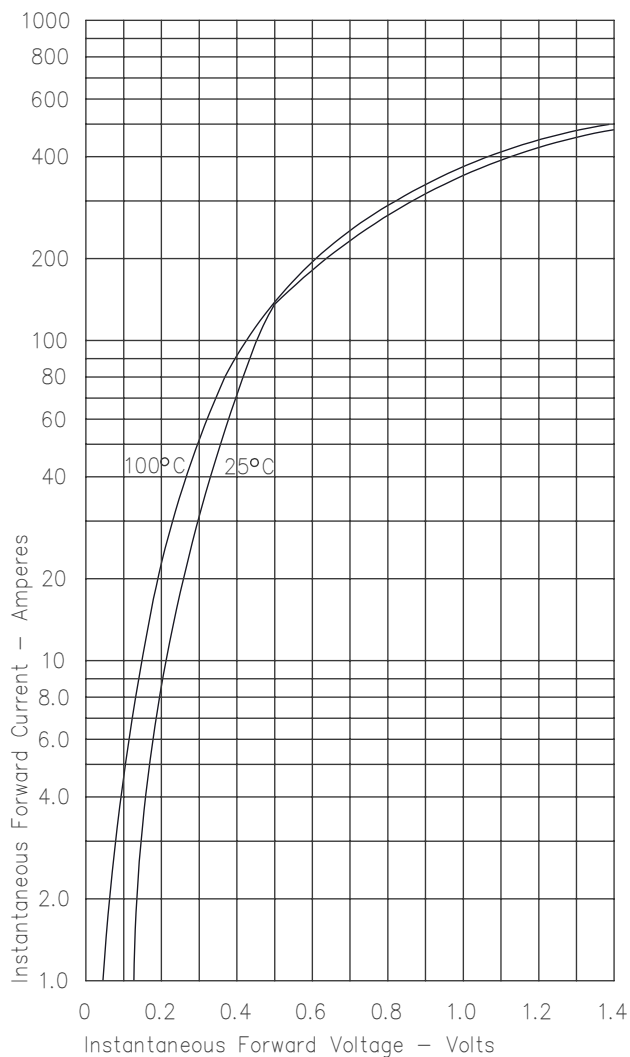


Figure 3
Typical Junction Capacitance – Per Leg

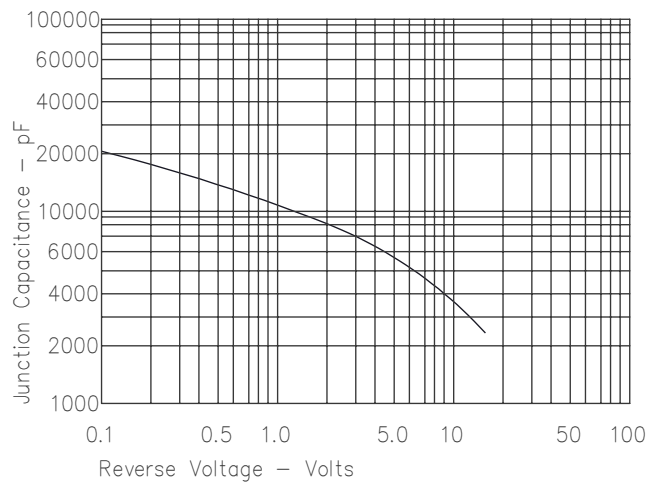


Figure 4
Forward Current Derating – Per Leg

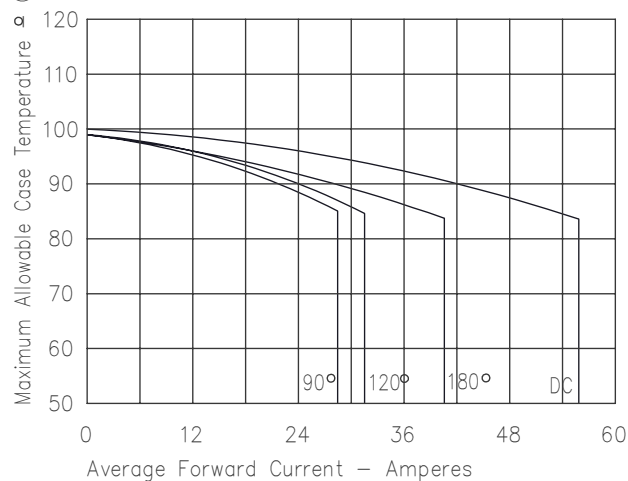


Figure 2
Typical Reverse Characteristics – Per Leg

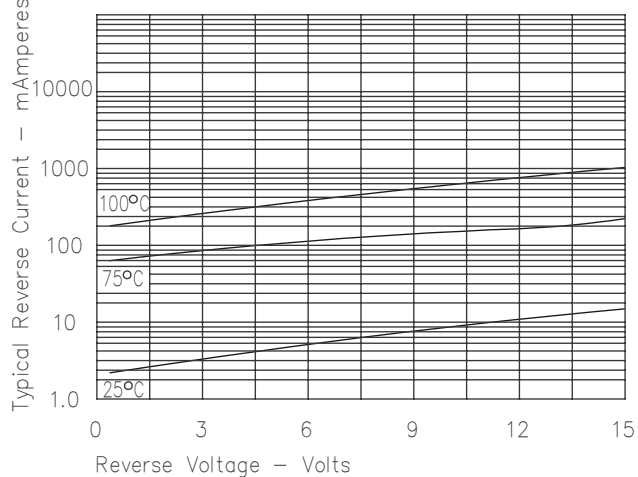


Figure 5
Maximum Forward Power Dissipation – Per Leg

