


XFEB321608 SERIES CHIP BEAD ARRAYS

- * TAPE AND REEL PACKAGING FOR HIGH VOLUME MANUFACTURING
10000 PCS PER 7" REEL
- * FOR DC/DC CONVERTERS, DC/AC INVERTERS, VRM APPLICATIONS
- * TEMP. RISE: 15°C TYPICAL ABOVE 60°C AMBIENT
- * OPERATING TEMP.: -40°C TO +125°C

Mechanical Dimensions:

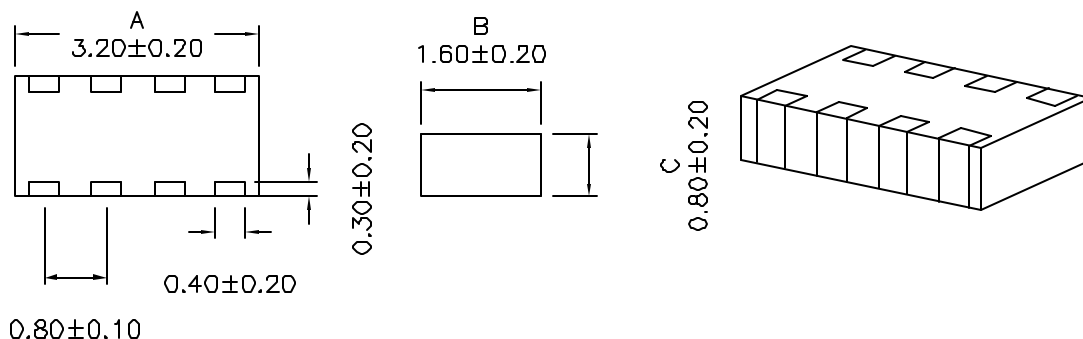

Part Number	IMPEDANCE (Ohms)	Test Freq. (MHz)	RDC Max (Ohms)	IDC Max (mA)
XFEB321608-300-4Z	30	100	0.10	200
XFEB321608-600-4G	60	100	0.25	200
XFEB321608-600-4Z	60	100	0.25	200
XFEB321608-121-4G	120	100	0.40	150
XFEB321608-121-4Z	120	100	0.30	150
XFEB321608-221-4G	220	100	0.45	150
XFEB321608-221-4Z	220	100	0.30	150
XFEB321608-301-4G	300	100	0.50	150
XFEB321608-301-4Z	300	100	0.40	150
XFEB321608-471-4G	470	100	0.55	100
XFEB321608-601-4G	600	100	0.65	100
XFEB321608-601-4Z	600	100	0.50	100
XFEB321608-102-4Z	1000	100	0.70	50