


VDSL TRANSFORMERS

For Use with Broadcom® BCM 6010/6020

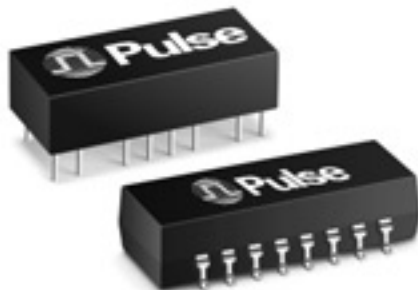

- Supports speeds up to 25.92 Mbps
- Provides two-wire to four-wire conversion
- Surface mount or through hole package

Electrical Specifications @ 25°C — Operating Temperature 0°C to 70°C

Part Number	Turns Ratio		DCR (MAX)	Return Loss (dB MIN)	Insertion Loss* (dB MAX)	Transhybrid Loss (dB MIN)	Longitudinal Balance (dB MIN)	Isolation Voltage (Vrms)
	Trans.	Rec.						
B4008 (THT)	2:1	1:1	0.5 Ω	138 kHz to 1 MHz: 13.5	138 kHz to 20 MHz: 0.5	138 kHz to 1 MHz: 30	138 kHz to 300 kHz: 60	2000
B4025 (SMT)				1 MHz to 20 MHz: 20		1 MHz to 20 MHz: 25	300 kHz to 1 MHz: 50	
							1 MHz to 20 MHz: 30	


NOTE: Common Mode Chokes to reduce common mode ingress from AM Broadcast or HAM Radios are available. See data sheet B912 for parts B4001 and B4003.

Surge Voltage Capability: Metallic: 800 Vpeak 10/560 μ sec. Long.: 2400 Vpeak 10/700 μ sec.

Surge over the Extended Temperature Range: Insertion Loss can increase to 1 dB. Return Loss can drop to 7 dB from 138 kHz to 300 kHz, and 12 dB from 300 kHz to 1 MHz.

Mechanicals

B4008

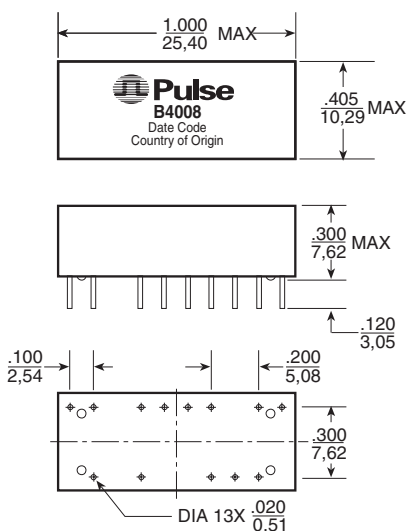


Weight.....2.8 grams

Tube.....20/tube

Dimensions: $\frac{\text{Inches}}{\text{mm}}$


Unless otherwise specified, all tolerances are $\pm .010$ / 0.25

B4025

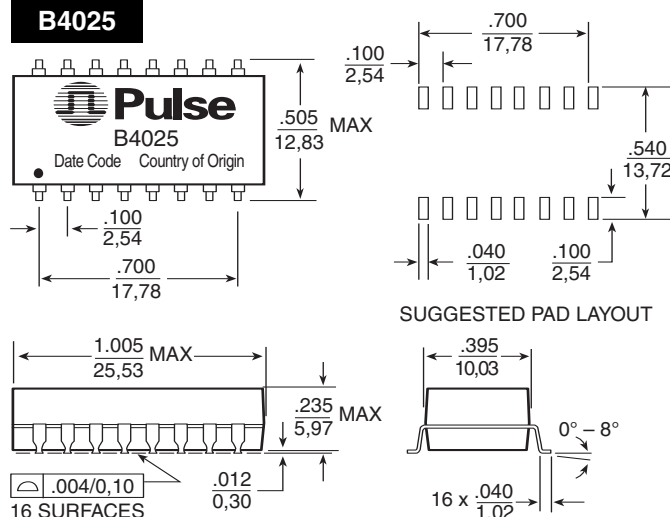


Schematics

B4008



B4025



For More Information :

UNITED STATES (Worldwide)

12220 World Trade Drive
San Diego, CA 92128
U.S.A.
<http://www.pulseeng.com>
TEL: 858 674 8100
FAX: 858 674 8262

UNITED KINGDOM (Northern Europe)

1 & 2 Huxley Road
The Surrey Research Park
Guildford, Surrey GU2 5RE
United Kingdom
TEL: 44 1483 401700
FAX: 44 1483 401701

FRANCE (Southern Europe)

Zone Industrielle
F-39270
Orgelet
France
TEL: 33 3 84 35 04 04
FAX: 33 3 84 25 46 41

SINGAPORE (Southern Asia)

150 Kampong Ampat
#07-01/02
KA Centre
Singapore 368324
TEL: 65 287 8998
FAX: 65 280 0080

TAIWAN, R.O.C. (Northern Asia)

3F-4, No. 81, Sec. 1
HsinTai Wu Road
Hsi-Chih, Taipei Hsien
Taiwan, R.O.C.
Tel: 886 2 2698 0228
FAX: 886 2 2698 0948

HONG KONG (China/Hong Kong)

19/F, China United Plaza
1008 Tai Nan West Street
Cheung Sha Wan, Kowloon
Hong Kong, China
TEL: 852 2788 6588
FAX: 852 2776 1055

DISTRIBUTOR

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be products and/or registered trademarks of their respective owners.

Printed on recycled paper. ©2002, Pulse Engineering, Inc.

PRELIMINARY B925.P (7/02)