


445757

2228
Videk PT No: 2014 3301A

CUSTOMER: VIDEK

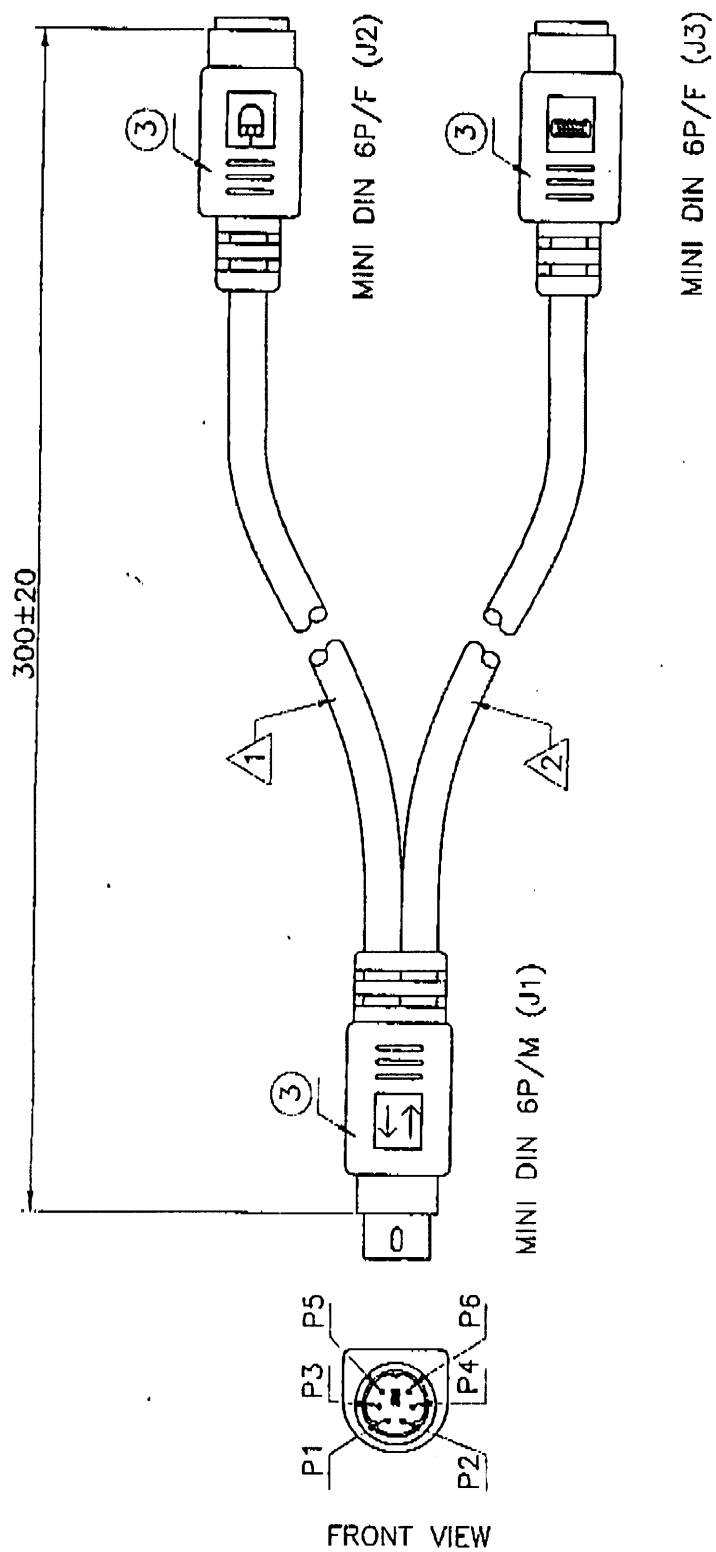

MS-010

NOTES:

① CABLE: NON UL, 28 AWG (7/0.127), TINNED AND STRANDED COPPER WIRE.
INSULATOR: PVC.

CABLING: 6 CONDUCTORS + DRAIN WIRE.
SHIELD: AL/MY COVERAGE 100%.
JACKET: PVC, COLOR: BEIGE.

② CABLE: NON UL, 28 AWG (7/0.127), TINNED AND STRANDED COPPER WIRE.
INSULATOR: PVC.

CABLING: 4 CONDUCTORS + DRAIN WIRE.
SHIELD: AL/MY COVERAGE 100%.
JACKET: PVC, COLOR: BEIGE.

③ CONNECTOR:

(J1): MINI DIN 6 WAYS MALE CONNECTOR.

INSULATOR: P.B.T. + GLASS FIBER, COLOR: BLACK.
CONTACT: COPPER ALLOY AND TIN PLATED.
SHELL: BRASS, NICKEL PLATED.

HOOD: PVC, MOLDED TYPE, COLOR: BEIGE.

(J2)&(J3): MINI DIN 6 WAYS FEMALE CONNECTOR.

INSULATOR: P.B.T. + GLASS FIBER, COLOR: BLACK.

CONTACT: COPPER ALLOY, GOLD FLASH.

SHELL: BRASS, NICKEL PLATED.

HOOD: PVC, MOLDED TYPE, COLOR: BEIGE.

4. ELECTRICAL TEST:

(1). 100% OPEN, SHORT TEST.

(2). INSULATION RESISTANCE: 1MΩ MIN.

WIRE LIST

MINI DIN 6P/M (J1)	COLOR	MINI DIN 6P/F (J2)
1	—	1
2	—	2
3	—	3
4	—	4
5	—	5
6	—	6
SHELL	DRAIN WIRE	SHELL

MINI DIN 6P/M (J1)	COLOR	MINI DIN 6P/F (J3)
1	—	—
2	—	1
3	—	3
4	—	4
5	—	—
6	—	5
SHELL	DRAIN WIRE	SHELL

ISSUE

CUSTOMER: VIDEK