



Micro Commercial Components

Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

2SC2383-R
2SC2383-O
2SC2383-Y

Features

- Capable of 0.9Watts of Power Dissipation.
- Collector-current 1.0A
- Collector-base Voltage 160V
- Operating and storage junction temperature range: -55°C to +150°C
- Marking: C2383
- Case Material:Molded Plastic. UL Flammability Classification Rating 94-0 and MSL Rating 1
- Lead Free Finish/RoHS Compliant ("P" Suffix designates RoHS Compliant. See ordering information)

Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Max	Units
--------	-----------	-----	-----	-------

OFF CHARACTERISTICS

$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage ($I_C=10mA$, $I_B=0$)	160		Vdc
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage ($I_C=100\mu A$, $I_E=0$)	160		Vdc
$V_{(BR)EBO}$	Emitter-Base Voltage ($I_E=10mA$, $I_C=0$)	6.0		Vdc
I_{CBO}	Collector Cutoff Current ($V_{CB}=150V$, $I_E=0$)		1.0	μA
I_{CER}	Collector Cutoff Current ($V_{CB}=150V$, $R_{EB}=10M\Omega$)		10	μA
I_{EBO}	Emitter Cutoff Current ($V_{EB}=6.0V$, $I_C=0$)		1.0	μA

ON CHARACTERISTICS

$h_{FE(1)}$	DC Current Gain ($I_C=200mA$, $V_{CE}=5.0V$)	60	320	
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage ($I_C=500mA$, $I_E=50mA$)		1.0	Vdc
V_{BE}	Base-Emitter Voltage ($I_C=5.0mA$, $V_{CE}=5.0V$)		0.75	Vdc

SMALL-SIGNAL CHARACTERISTICS


f_T	Transistor Frequency ($I_C=200mA$, $V_{CE}=5.0V$)	20		MHz
-------	---	----	--	-----

CLASSIFICATION OF $h_{FE(1)}$

Rank	R	O	Y
Range	60-120	100-200	160-320

NPN Silicon
Plastic-Encapsulate
Transistor

TO-92MOD

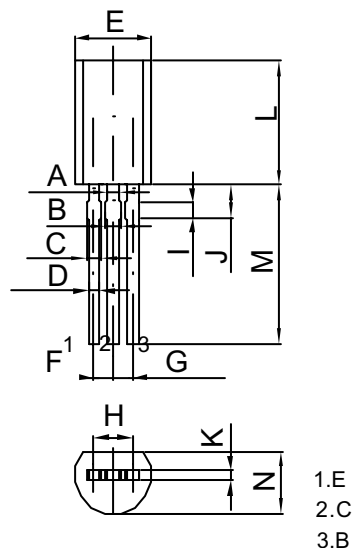

DIMENSIONS

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	---	.030	---	.750	
B	---	.039	---	1.00	
C	---	.031	---	.80	
D	---	.024	---	0.60	
E	---	.201	---	5.10	
F	.050		1.27		
G	.050		1.27		
H	.100		2.54		
I	.039		1.00		
J	---	.087	---	2.20	
K	---	.024	---	.60	
L	---	.323	---	8.20	
M	---	.413	---	10.50	
N	---	.161	---	4.10	

Ordering Information

Device	Packing
(Part Number)-BP	Bulk;500pcs/Bag

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes .
Micro Commercial Components Corp. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

APPLICATIONS DISCLAIMER

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.