

SHINDENGEN

Power Switching Regulators


MA4000 Series

MA4510

OUTLINE DIMENSIONS

Case : MA7

Unit : mm

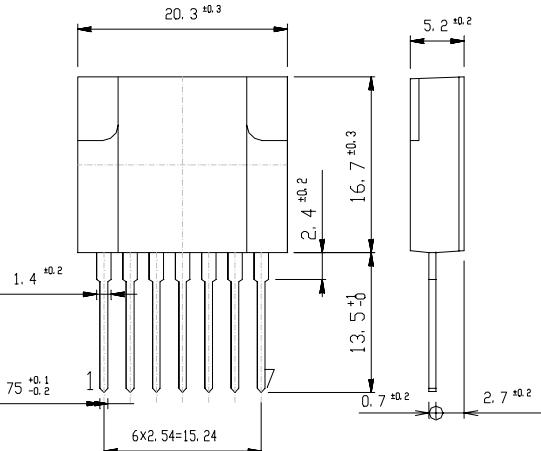

RATINGS

● Absolute Maximum Ratings

Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T _{stg}		-30~125	°C
Operating Temperature	Top		-20~125	°C
Junction Temperature	T _j		150	°C
Peak Input Voltage	V _{in}	(2)+,(3)−,(5)−	500	V
		DC (2)+,(3)−	3	A
Input Current	I _{in}	Pulse (2)+,(3)− Duty1/2	5	A
Maximum Power Dissipation	P _D	T _a =25°C	3	W
	P _D	Heatsink T _c =100°C	13	W
Dielectric Strength	V _{dis}	Terminals To Case AC 1 min	2	kV
Insulation Resistance		Terminals To Case 500VDC	100	MΩ
Max Voltage (4) to (6)	V(4)·(6)	(4)+,(6)−	6	V
Max Current (6) to (4)	I(6)·(4)	(6)+,(4)− (Peak) Duty Max 1/2	200	mA
Reverse Current	I _Z	(5)+,(4)−	MAX 20	mA

● Electrical Characteristics (T_c=25°C)

Item	Symbol	Conditions	Ratings	Unit
Q1	Zero Gate Voltage Drain Current	I _{DSS} V _{DS} =500V, V _{GS} =0V,(2)+,(3)−	MAX 250	μA
			TYP (2.0)	Ω
	Static Drain-Source On-State Resistance	R _{DS(on)} I _D =1.5A, (2)+,(3)− V _{GS} =10V,(5)+,(3)−	MAX (2.3)	Ω
D1	Thermal Resistance	θ _{jc} Junction to Case	MAX 3.8	°C/W
Q2	Reverse Current	I _R V _R =500V, (1)+,(2)−	MAX 10	μA
	Forward Voltage	V _F I _F =0.6A, (2)+,(1)−	MAX 1.7	V
	Fold Back Detection Voltage	(3)+,(4)−	TYP 0.7	V

● Standard Operating Condition•Design Standard For Application Circuit

Item	Conditions	Ratings	Unit
Input Rated Voltage		AC90~132	V
Output Nominal Voltage		12	V
Output Nominal Current		2.5	A

● Standard Operating Condition•Standard Operating Characteristics (Ta=25°C)

Item	Conditions	Ratings	Unit	
Minimum Input Full Load Output Voltage	Vin=90V, I _O =2.5A	12.0±0.6	V	Fig 1, ① Refer
Maximum Input Light Load Output Voltage	Vin=132V, I _O =0.25A	12.0±0.6	V	Fig 1, ② Refer
Over Current Protection	Foldback Current	MAX 3.8	A	Fig 1, ③ Refer
	Short Circuit	Nodamage To Any Device, Automatic Recovery.	-	Fig 1, ④ Refer

Figure in ○=Terminal Sign






Fig1. Output Voltage/Current

MA4510


Transfer Characteristics

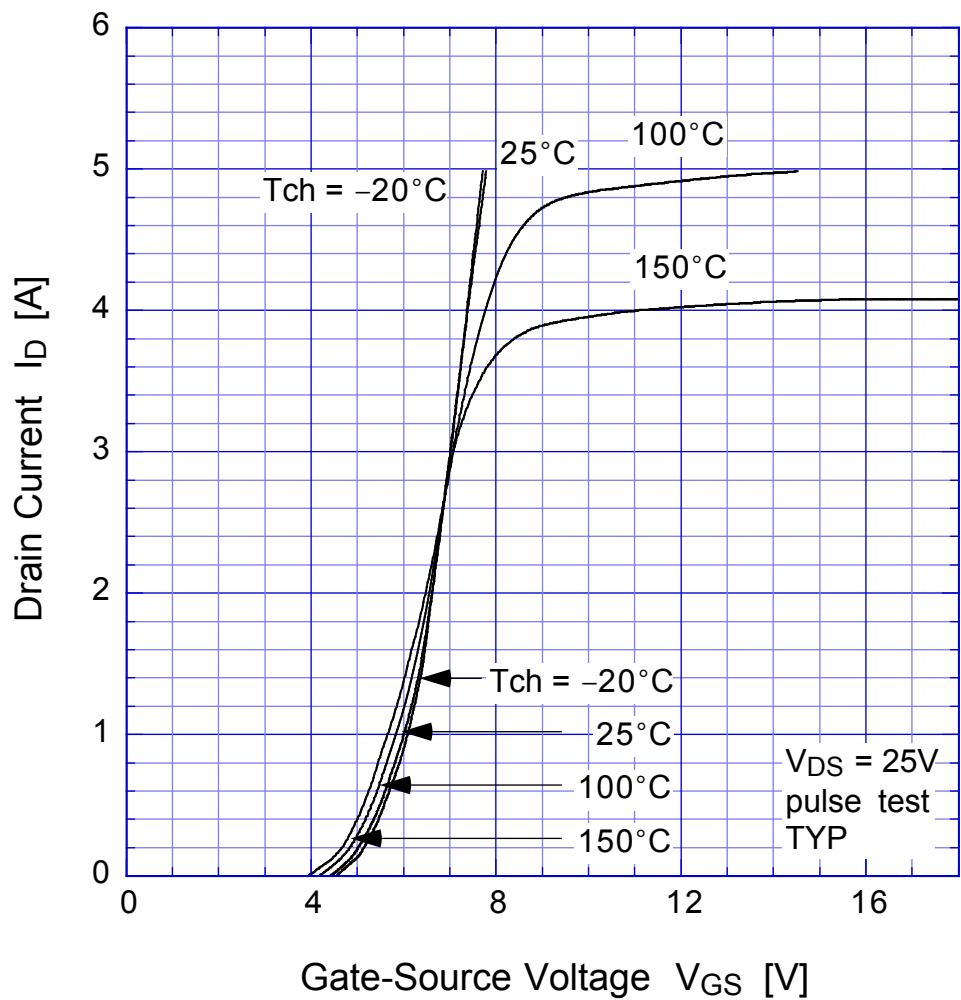


MA4510 Static Drain-Source On-state Resistance

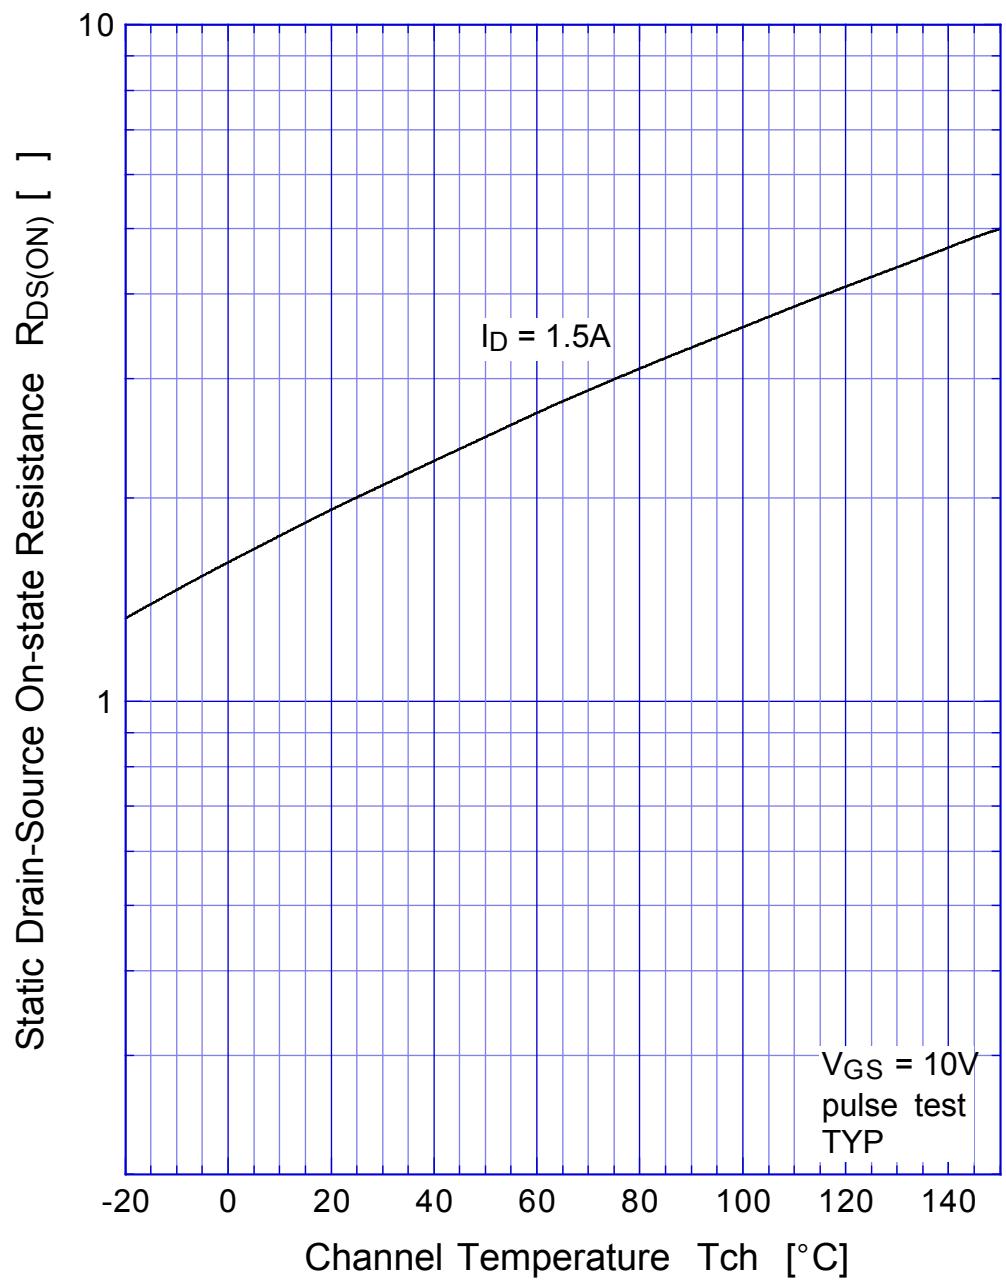


MA4510 Gate Threshold Voltage

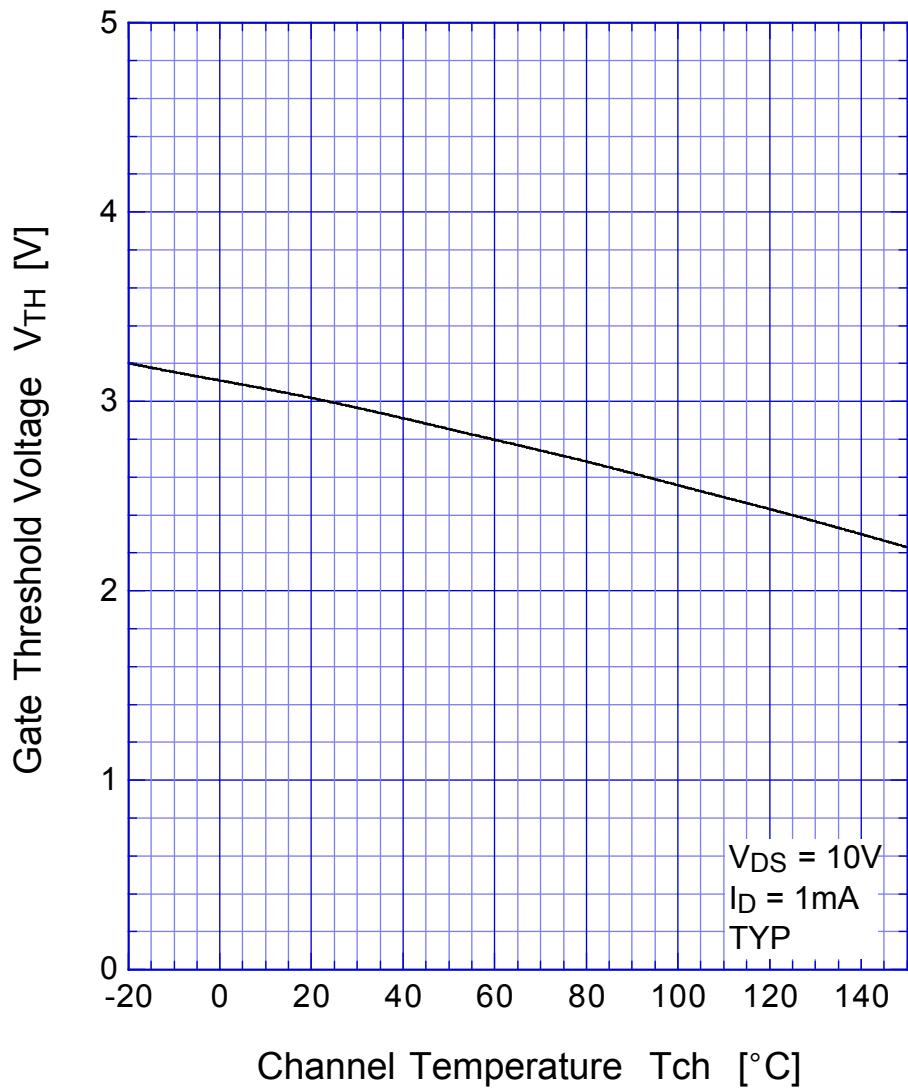


MA4510 Capacitance

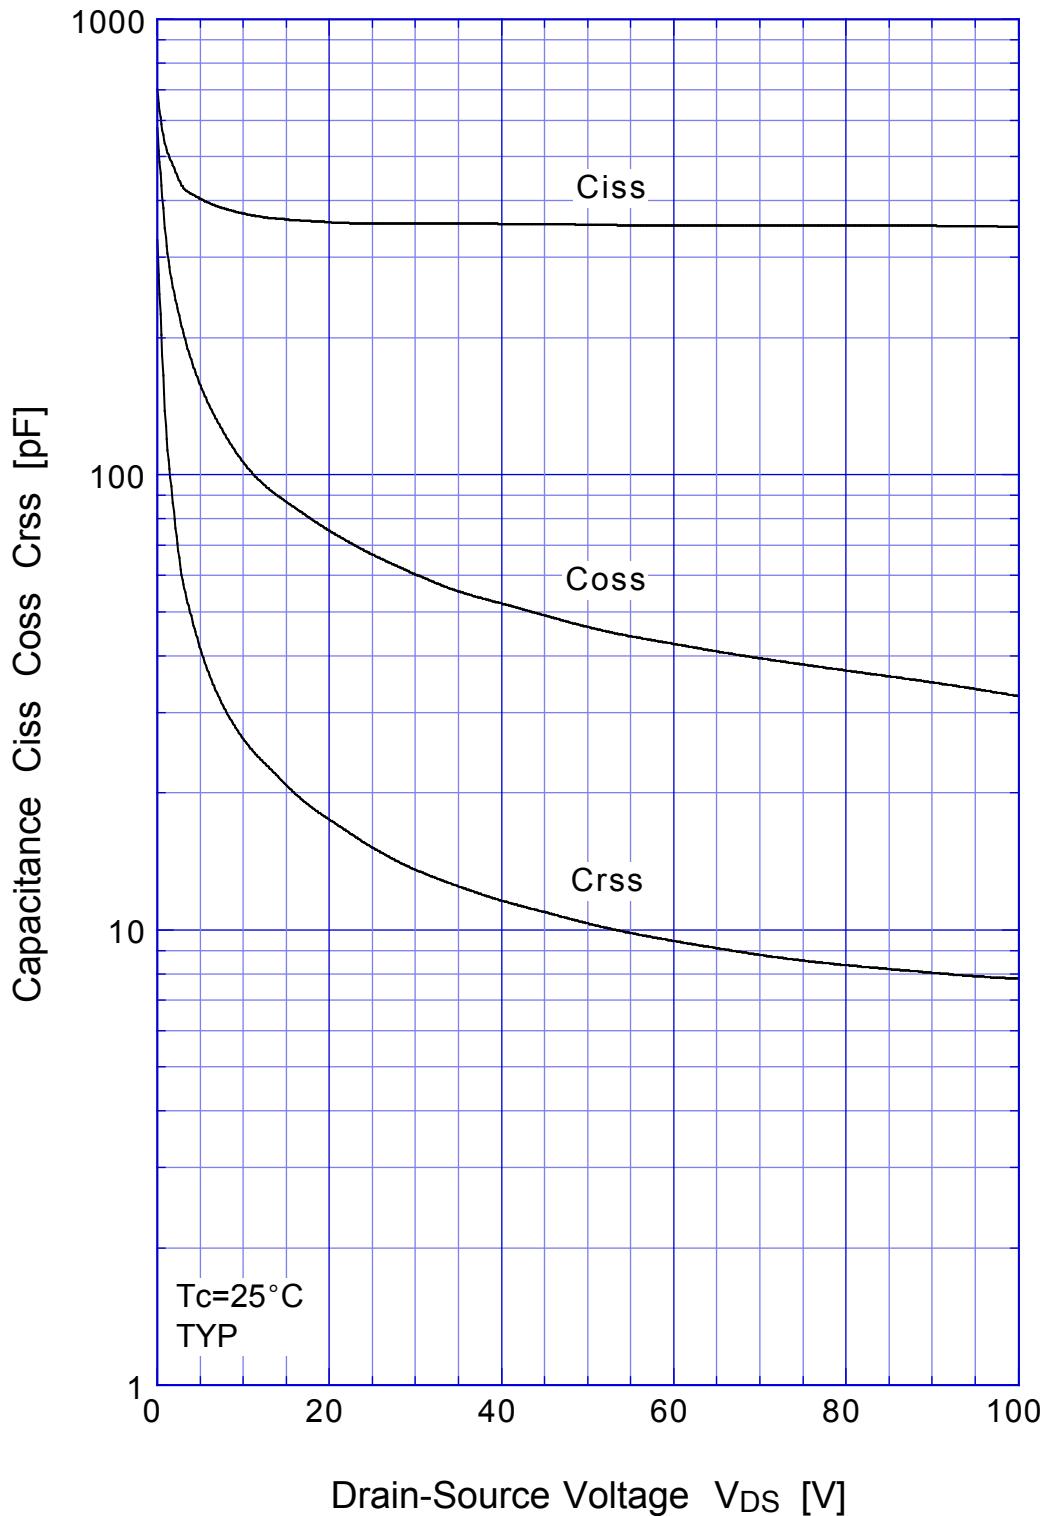

MA4510 Transient Thermal Impedance

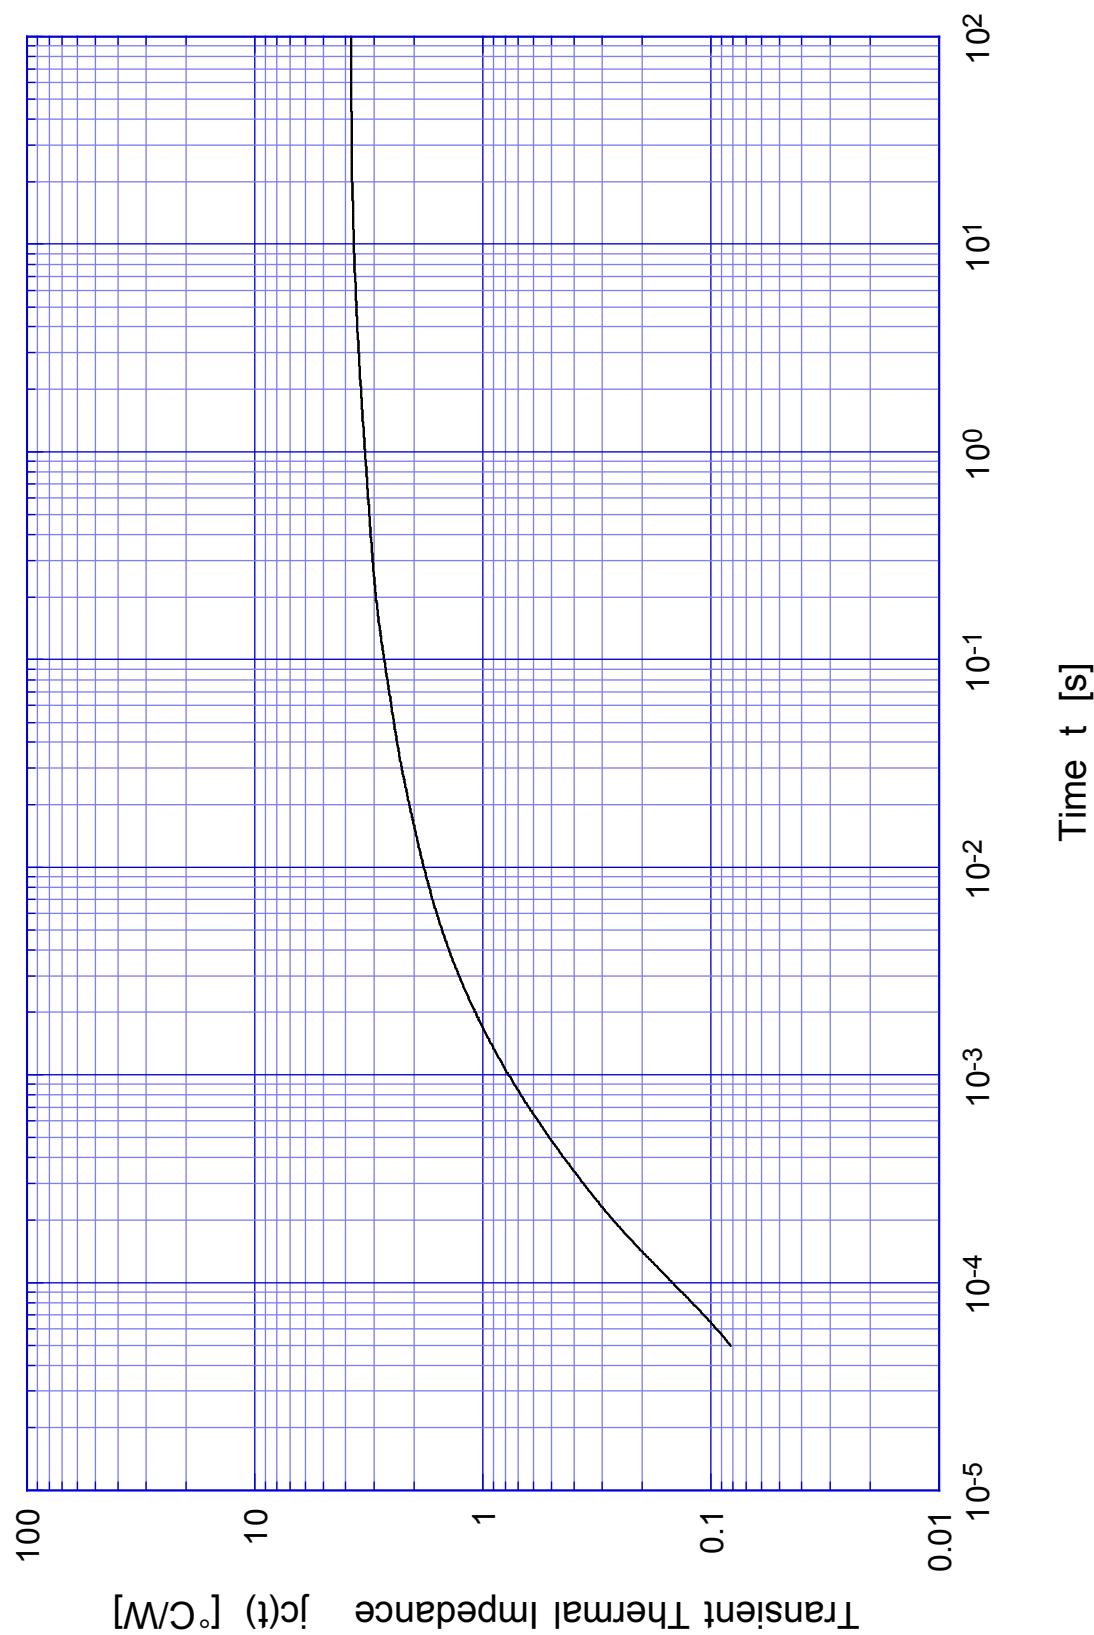


MA4510 Safe Operating Area

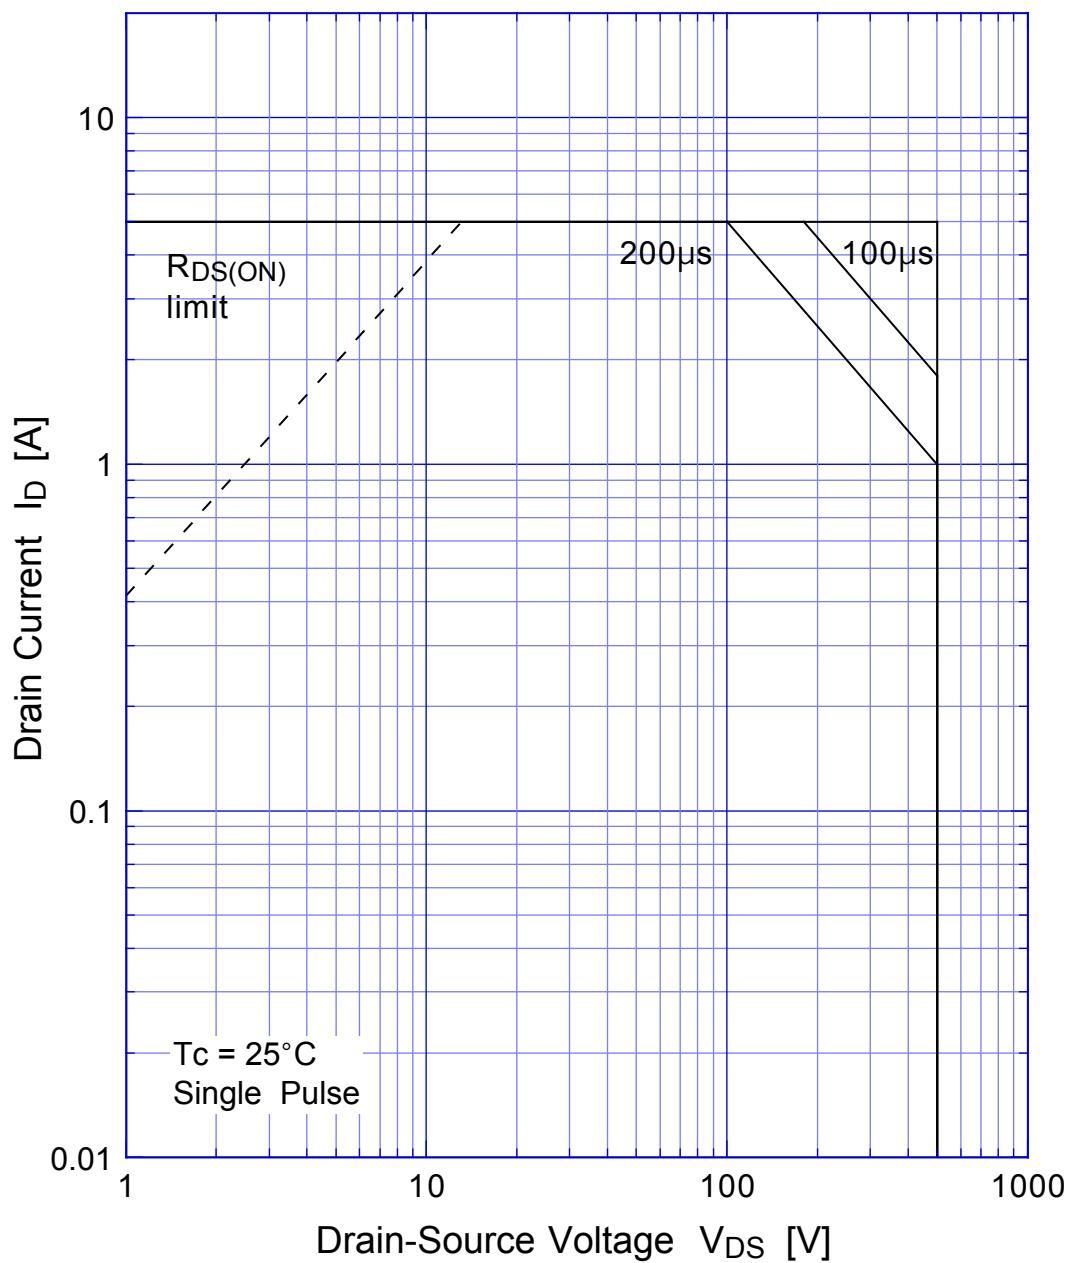

MA4510

Power Derating

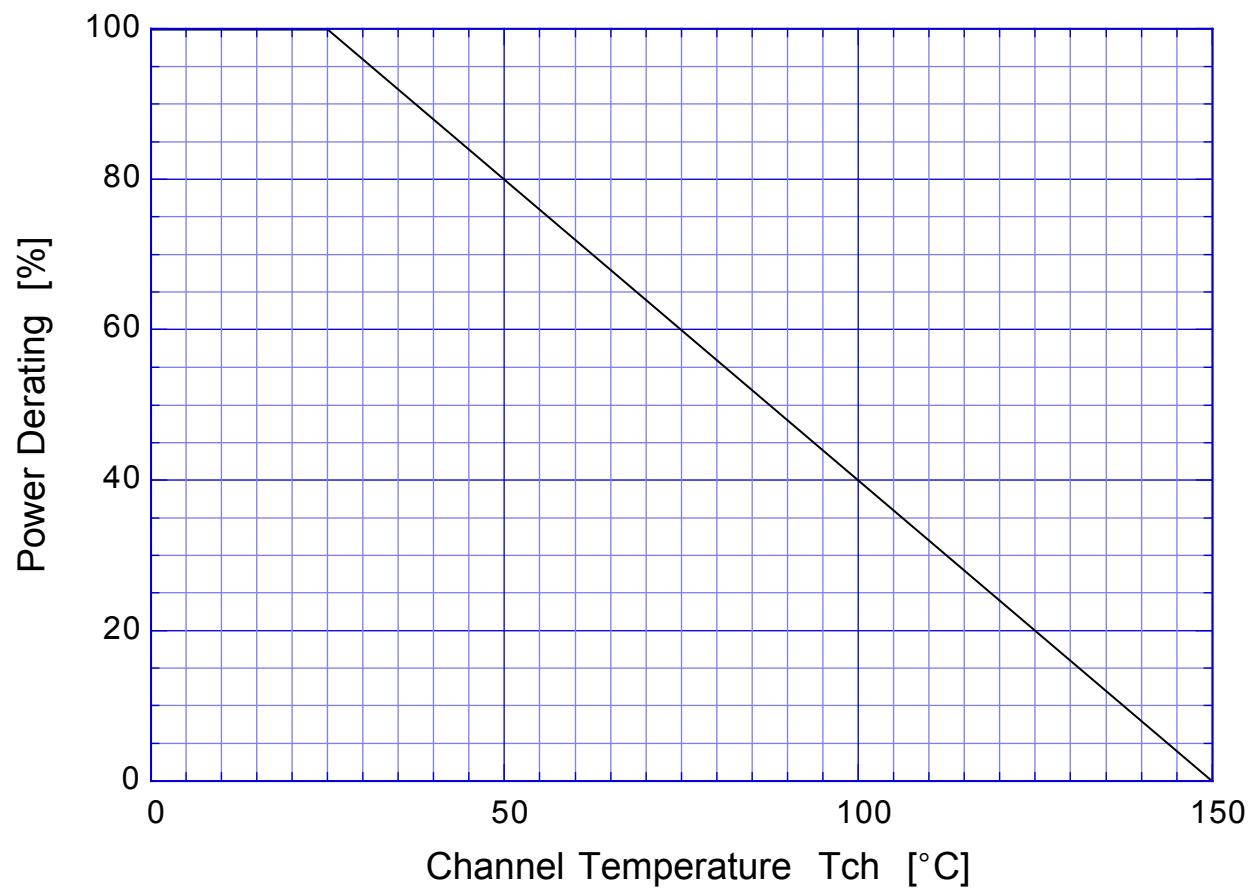

MA4510

Reverse Bias SOA

