

M•C•C

Micro Commercial Components
21201 Itasca Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

FST10020
THRU
FST100100

Features

- Metal of siliconrectifier, majority carrier conductor
- Guard ring for transient protection
- Low power loss high efficiency
- High surge capacity, High current capability

Maximum Ratings

- Operating Temperature: -65°C to +150°C
- Storage Temperature: -65°C to +150°C

MCC Part Number	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
FST10020	20V	14V	20V
FST10030	30V	21V	30V
FST10035	35V	24.5V	35V
FST10040	40V	28V	40V
FST10045	45V	31.5V	45V
FST10060	60V	42V	60V
FST10080	80V	56V	80V
FST110100	100V	70V	100V


Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward Current	$I_{F(AV)}$	100 A	$T_A = 85^\circ C$
Peak Forward Surge Current	I_{FSM}	1000A	8.3ms, half sine
Maximum Instantaneous Forward Voltage FST10020-10045 FST10060 FST10080-100100	V_F	.63 V .75 V .84 V	$I_{FM} = 50.0A$; $T_A = 25^\circ C$
Maximum DC Reverse Current At Rated DC Blocking Voltage	I_R	2mA	$T_A = 25^\circ C$
Typical Junction Capacitance	C_J	300pF	Measured at 1.0MHz, $V_R=4.0V$

*Pulse Test: Pulse Width 300μsec, Duty Cycle 1%

**100 Amp
Schottky Barrier
Rectifier
20 to 100 Volts**

POWERMOD

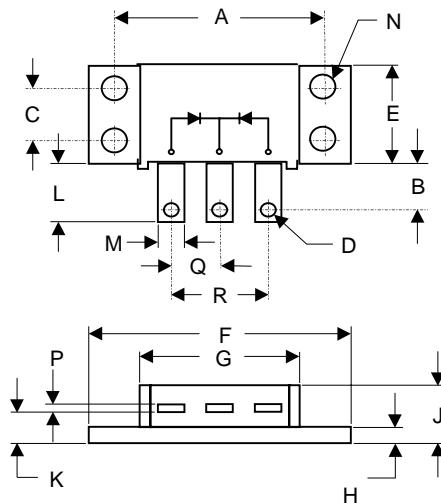


DIM	DIMENSIONS				NOTE
	INCHES		MM		
	MIN	MAX	MIN	MAX	
A	1.995	2.005	50.67	50.93	
B	.330	.325	7.62	8.26	
C	.495	.505	12.57	12.83	
D	.182	.192	4.62	4.88	
E	.990	1.010	25.12	26.65	
F	1.490	1.510	37.85	38.35	
G	1.500	1.525	38.10	38.70	
H	.120	.130	3.05	3.30	
J	-----	.400	-----	10.16	
K	.240	.260	6.10	6.60	
L	.490	.510	12.45	12.95	
M	.330	.350	8.38	8.90	
N	.175	.195	4.45	4.95	Ø
P	.035	.045	0.89	1.14	
R	.445	.455	11.30	11.56	
S	.890	.910	22.61	23.11	

FST10020 thru FST100100


M·C·C·

Figure 1
Typical Forward Characteristics

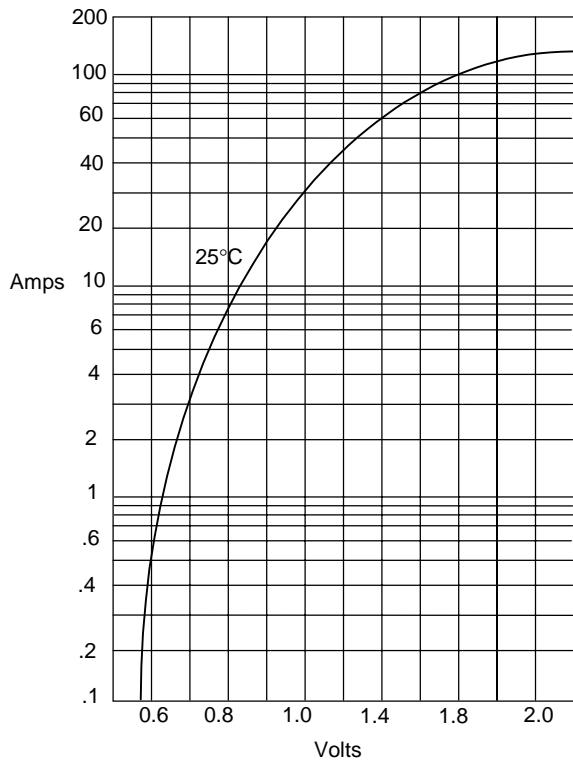


Instantaneous Forward Current - Amperes versus
Instantaneous Forward Voltage - Volts

Figure 2
Forward Derating Curve

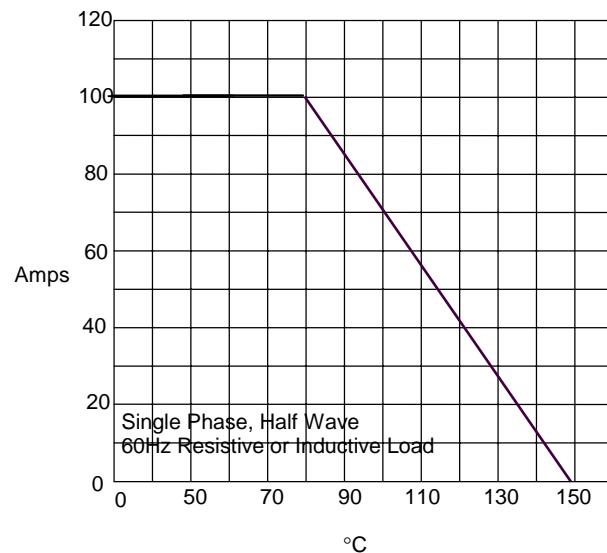

Average Forward Rectified Current - Amperes versus
Ambient Temperature - °C

Figure 3
Junction Capacitance

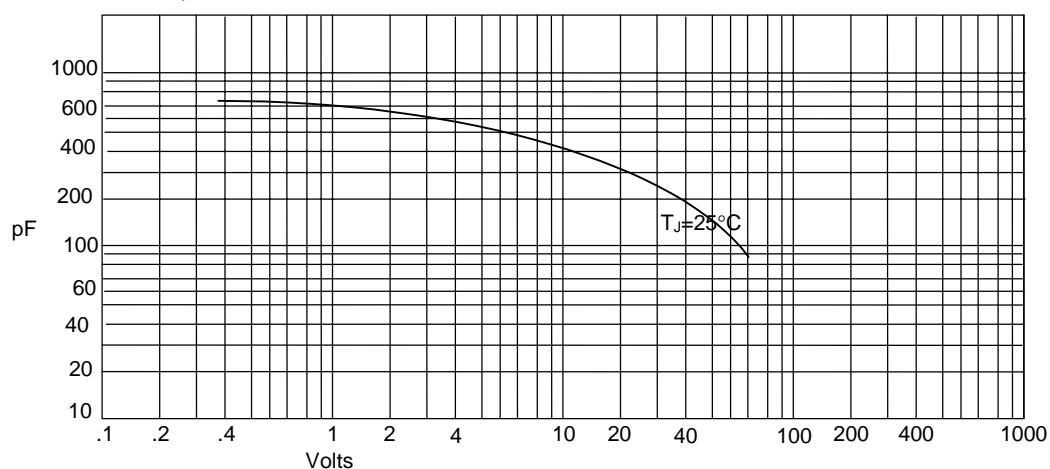


Junction Capacitance - pF versus
Reverse Voltage - Volts

FST10020 thru FST100100


•M•C•C•

Figure 4
Typical Reverse Characteristics

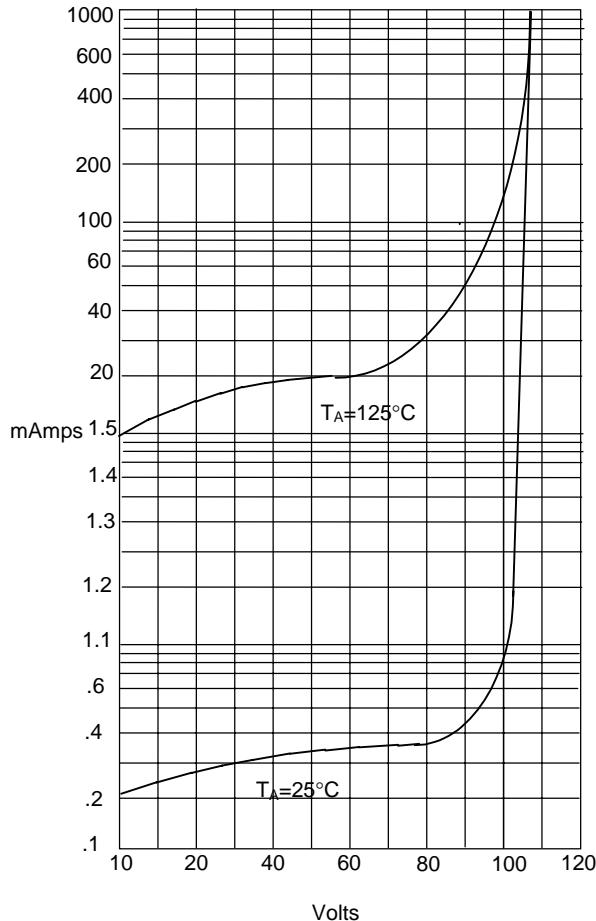

Instantaneous Reverse Leakage Current - MicroAmperes versus
Percent Of Rated Peak Reverse Voltage - Volts

Figure 5
Peak Forward Surge Current

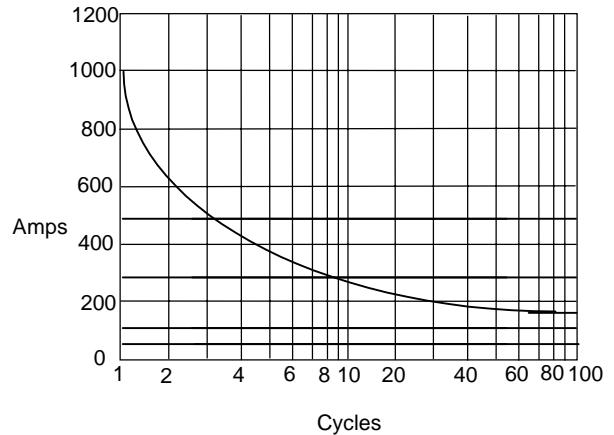

Peak Forward Surge Current - Amperes versus
Number Of Cycles At 60Hz - Cycles