


Absolute maximum ratings


(Ta=25°C)

Symbol	Ratings		Unit
	N channel	P channel	
V _{DS}	60	-60	V
V _{GS}	±20	±20	V
I _D	6	-6	A
I _{D(pulse)}	10 (PW≤1ms, duty≤25%)	-10 (PW≤1ms, duty≤25%)	A
P _T	5 (Ta=25°C, with all circuits operating, without heatsink)		W
	35 (Tc=25°C, with all circuits operating, with infinite heatsink)		W
θ _{J-A}	25 (Junction-Air, Ta=25°C, with all circuits operating)		°C/W
θ _{J-C}	3.57 (Junction-Case, Tc=25°C, with all circuits operating)		°C/W
V _{ISO}	1000 (Between fin and lead pin, AC)		V _{rms}
T _{ch}	150		°C
T _{stg}	-40 to +150		°C

Equivalent circuit diagram

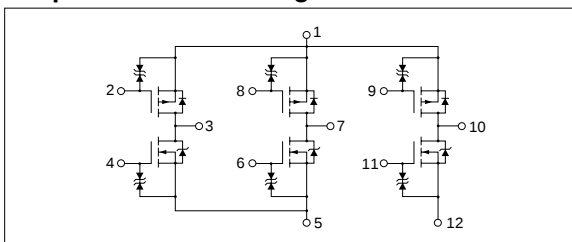

Characteristic curves

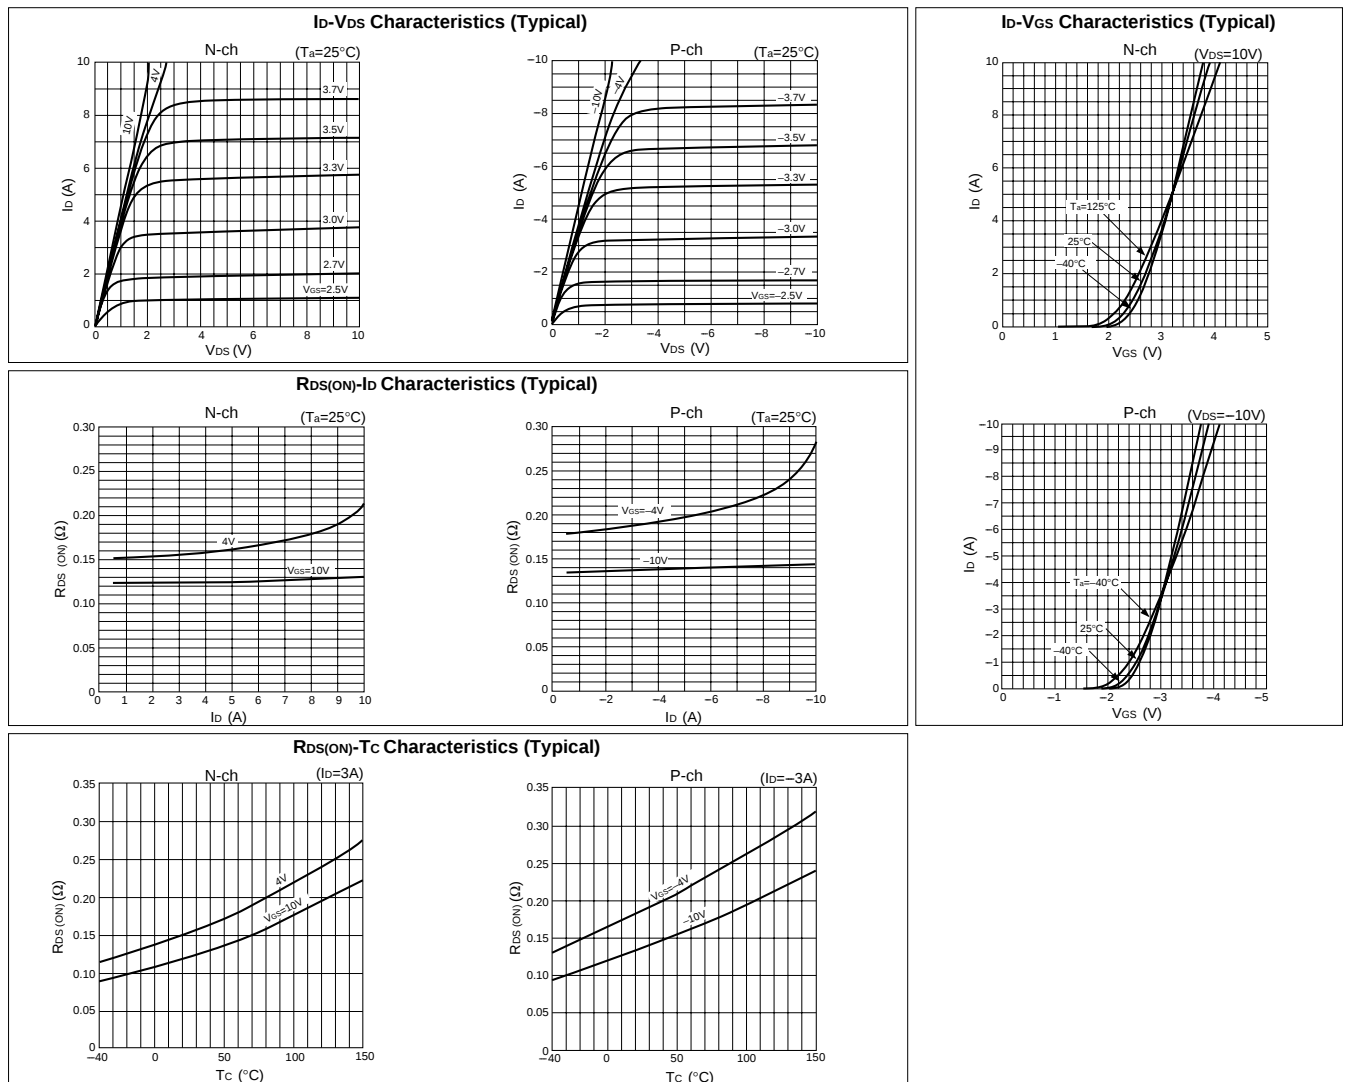

Electrical characteristics

(Ta=25°C)

Symbol	N channel					P channel				
	Specification			Unit	Conditions	Specification			Unit	Conditions
	min	typ	max			min	typ	max		
$V_{(BR)DSS}$	60			V	$I_D=100\mu A, V_{GS}=0V$	-60			V	$I_D=-100\mu A, V_{GS}=0V$
I_{GSS}			± 10	μA	$V_{GS}=\pm 20V$			± 10	μA	$V_{GS}=\pm 20V$
I_{DSS}			100	μA	$V_{DS}=60V, V_{GS}=0V$			-100	μA	$V_{DS}=-60V, V_{GS}=0V$
V_{TH}	1.0		2.0	V	$V_{DS}=10V, I_D=250\mu A$	-1.0		-2.0	V	$V_{DS}=-10V, I_D=-250\mu A$
$Re_{(yfs)}$		5.5		S	$V_{DS}=10V, I_D=3A$		6		S	$V_{DS}=-10V, I_D=-3A$
$R_{DS(ON)}$			0.22	Ω	$V_{GS}=4V, I_D=3A$			0.22	Ω	$V_{GS}=-10V, I_D=-3A$
C_{iss}		320		pF	$V_{DS}=10V, f=1.0MHz,$ $V_{GS}=0V$		790		pF	$V_{DS}=-10V, f=1.0MHz,$ $V_{GS}=0V$
C_{oss}		160		pF			310		pF	
C_{rss}		35		pF			90		pF	
$td_{(on)}$		16		ns	$I_D=3A, V_{DD}=20V,$ $R_L=6.67\Omega, V_{GS}=5V,$ see Fig. 3 on page 16.		40		ns	$I_D=-3A, V_{DD}=20V,$ $R_L=6.67\Omega, V_{GS}=-5V,$ see Fig. 4 on page 16.
t_r		65		ns			110		ns	
$td_{(off)}$		70		ns			160		ns	
t_f		45		ns			80		ns	
V_{SD}		1.2		V	$I_{SD}=6A, V_{GS}=0V$		-1.1		V	$I_{SD}=-6A, V_{GS}=0V$
t_{rr}		65		ns	$I_{SD}=3A, V_{GS}=0V,$ $di/dt=100A/\mu s$		85		ns	$I_{SD}=-3A, V_{GS}=0V,$ $di/dt=100A/\mu s$

Characteristic curves

