



GLASS PASSIVATED SINGLE-OHASE BPIDGE RECTIFIER

GBPC25005/W THRU GBPC2510/W

VOLTAGE RANGE

50 to 1000 Volts

CURRENT


25.0 Ampere

FEATURES

- Plastic package has UL flammability classification 94V-0
- Integrally molded heatsink provides very low thermal resistance for maximum heat dissipation
- High forward surge capacity
- Glass passivated chip junction
- High isolation voltage from case to lugs
- High temperature soldering guaranteed: 260°C/10 seconds,
- Available in either lug package (GBPC25005) or wire lead package (GBPC25005W)

MECHANICAL DATA

- Case: Epoxy, Molded Plastic with integrally mounted heatsink
- Terminals: Plated 0.25" (6.35mm) lug or plated 0.040" (1.02mm) diameter lead
- Polarity: Polarity symbols marked on case
- Mounting: Thru hole for #10 screw, 20 in-lbs Torque max. See Note 3
- Weight: 0.53 ounce, 15.0 gram-GBPC35 and GBPC35-W

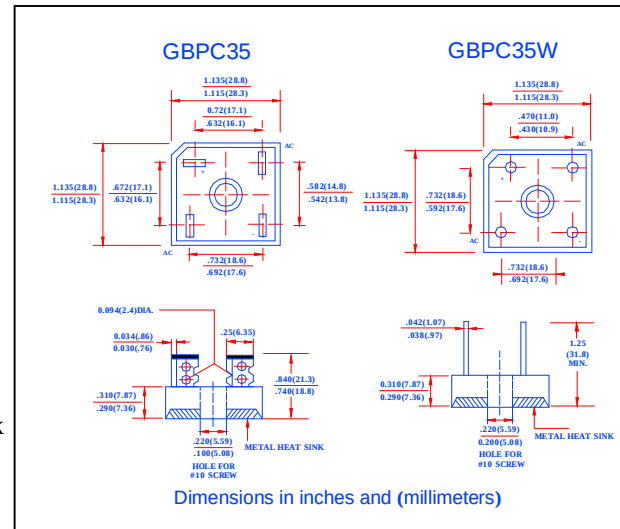

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

		SYMBOLS	GBPC 25005/W	GBPC 2501/W	GBPC 2502/W	GBPC 2504/W	GBPC 2506/W	GBPC 2508/W	GBPC 2510/W	UNIT
Maximum Repetitive Peak Reverse Voltage		V _{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage		V _{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage		V _{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current (SEE FIG.1) at T _c =55°C		I _(AV)	25							Amps
Peak Forward Surge Current 8.3mS single half sine wave superimposed on rated load (JEDEC method)		I _{FSM}	300							Amps
Rating for Fusing (t<8.3ms)		I ² t	375							A ² s
Maximum Instantaneous Forward Voltage drop Per Bridge element 12.5A		V _F	1.1							Volts
Maximum DC Reverse Current at rated DC blocking Voltage per element	T _A = 25°C	I _R	5.0							μA
	T _A = 125°C		500							
Isolation Voltage from case to lug or lead		V _{ISO}	2500							nS
Typical Junction Capacitance per leg (NOTE 1)		C _j	300							pF
Typical Thermal Resistance per leg (NOTE 2)		R _{ΘJC}	1.9							°C/W
Operating Junction Temperature		T _J	(-55 to +150)							°C
Storage Temperature Range		T _{STG}	(-55 to +150)							°C

Notes:

1. Measured at 1.0MHz and applied reverse voltage of 4.0V
2. Thermal resistance from junction to case per leg
3. Bolt down on heat-sink with silicon thermal compound between bridge and mounting surface for maximum heat transfer efficiency with #10 screw.



GLASS PASSIVATED SINGLE-PHASE BRIDGE RECTIFIER

GBPC25005/W THRU GBPC2510/W

VOLTAGE RANGE	50 to 1000 Volts
CURRENT	25.0 Ampere

RATINGS AND CHARACTERISTIC CURVES GBPC25005/W THRU GBPC2510/W

FIG. 5- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER LEG

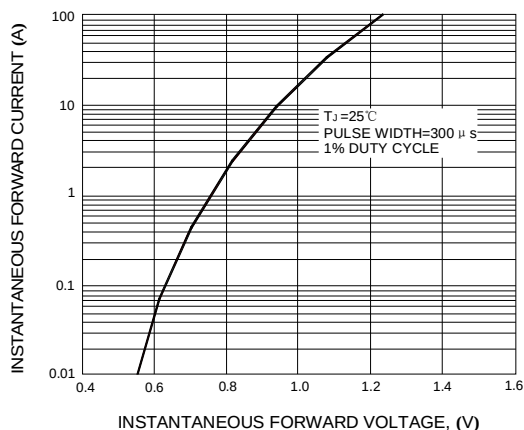


FIG. 6 - TYPICAL REVERSE LEAKAGE CHARACTERISTICS PER LEG

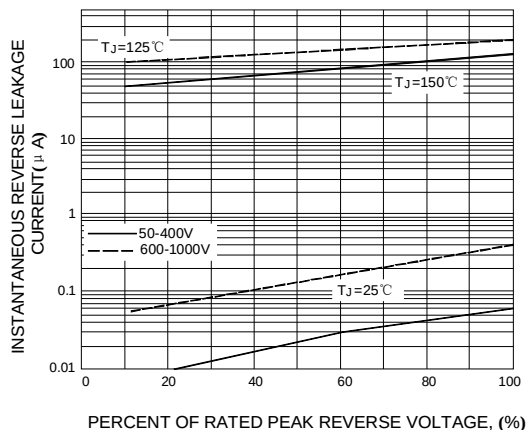


FIG. 7 - TYPICAL JUNCTION CAPACITANCE PER LEG


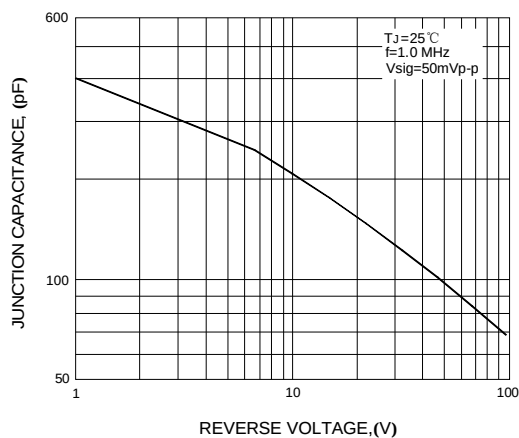


FIG. 8 - TYPICAL TRANSIENT THERMAL IMPEDANCE PER LEG



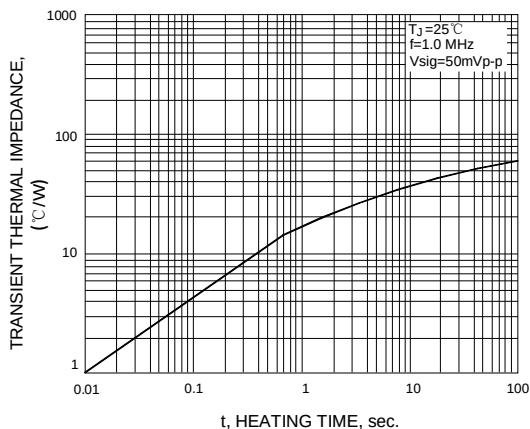

GLASS PASSIVATED SINGLE-OHASE BPIDGE RECTIFIER

GBPC25005/W THRU GBPC2510/W

VOLTAGE RANGE 50 to 1000 Volts
CURRENT 25.0 Ampere

RATINGS AND CHARACTERISTIC CURVES GBPC25005/W THRU GBPC2510/W

FIG. 5- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER LEG

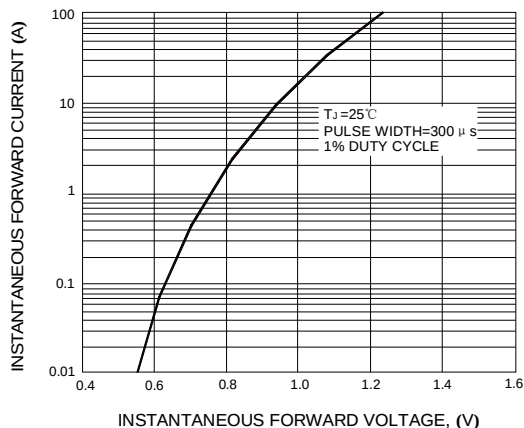


FIG. 6 - TYPICAL REVERSE LEAKAGE CHARACTERISTICS PER LEG

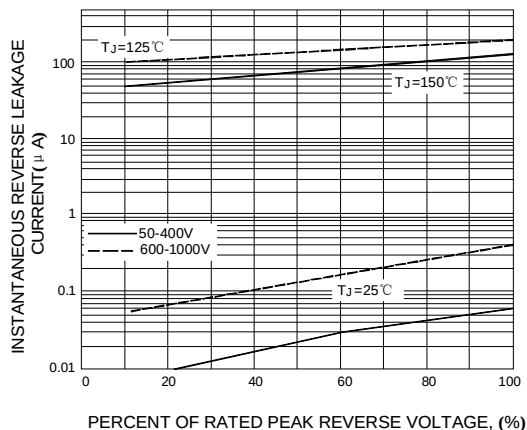


FIG. 7 - TYPICAL JUNCTION CAPACITANCE PER LEG

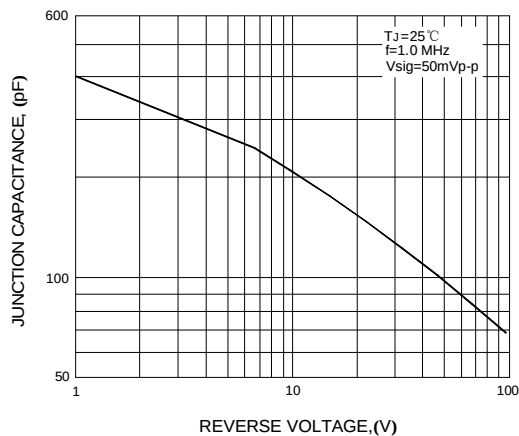


FIG. 8 - TYPICAL TRANSIENT THERMAL IMPEDANCE PER LEG

