



Standard Recovery Diodes, 160 A (INT-A-PAK Power Modules)

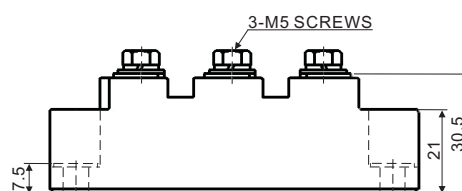

FEATURES

- High voltage
- Electrically isolated by DBC ceramic (Al_2O_3)
- 3000 V_{RMS} isolating voltage
- Industrial standard package
- High surge capability
- Glass passivated chips
- Modules uses high voltage power diodes in four basic configurations
- Simple mounting
- UL approved file E320098 
- Compliant to RoHS
- Designed and qualified for multiple level

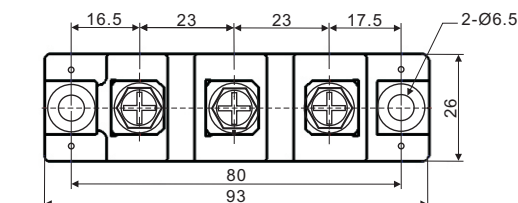


All dimensions in millimeters

APPLICATIONS

- DC motor control and drives
- Battery charges
- Welders
- Power converters

PRODUCT SUMMARY

$I_{F(AV)}$	160 A
Type	Modules - Diode, High Voltage

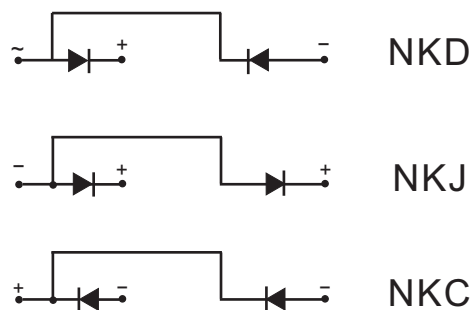

MAJOR RATINGS AND CHARACTERISTICS

SYMBOL	CHARACTERISTICS	VALUE	UNITS
$I_{F(AV)}$		160	A
	T_C	100	°C
$I_{F(RMS)}$		251	A
I_{FSM}	50 Hz	6000	
	60 Hz	6300	
I^2t	50 Hz	180	kA ² s
	60 Hz	163	
$I^2\sqrt{t}$		1800	kA ² √s
V_{RRM}		400 to 1600	V
T_J	Range	-40 to 150	°C

ELECTRICAL SPECIFICATIONS

VOLTAGE RATINGS				
TYPE NUMBER	VOLTAGE CODE	V_{RRM} , MAXIMUM REPETITIVE PEAK REVERSE VOLTAGE V	V_{RSM} , MAXIMUM NON-REPETITIVE PEAK REVERSE VOLTAGE V	I_{RRM} AT 150 °C mA
NKD160..S NKJ160..S NKC160..S	04	400	500	8
	08	800	900	
	12	1200	1300	
	14	1400	1500	
	16	1600	1700	

FORWARD CONDUCTION					
PARAMETER	SYMBOL	TEST CONDITIONS		VALUE	UNITS
Maximum average on-state current at case temperature	$I_{F(AV)}$	180° conduction, half sine wave		160	A
Maximum RMS on-state current	$I_{F(RMS)}$	180° conduction, half sine wave ,50Hz , $T_C = 100^{\circ}C$		100	°C
Maximum peak, one-cycle, on-state non-repetitive surge current	I_{FSM}	t = 10 ms	No voltage reapplied	251	A
		t = 8.3 ms		6000	
Maximum I^2t for fusing	I^2t	t = 10 ms	No voltage reapplied	6300	kA ² s
		t = 8.3 ms		180	
		t = 10 ms	100% V_{RRM} reapplied	163	
		t = 8.3 ms		126	
				114	
Maximum $I^2\sqrt{t}$ for fusing	$I^2\sqrt{t}$	t = 0.1 ms to 10 ms, no voltage reapplied		1800	kA ² √s
Maximum forward voltage drop	V_{FM}	$I_{FM} = 300A$, $T_J = 25^{\circ}C$, 180° conduction		1.4	V

BLOCKING				
PARAMETER	SYMBOL	TEST CONDITIONS	VALUES	UNITS
Maximum peak reverse and off-state leakage current	I_{RRM}	$T_J = 150^{\circ}C$	8	mA
RMS isolation Voltage	V_{ISO}	50 Hz, circuit to base ,all terminals shorted ,t = 1s	3000	V
		t = 60s	2500	

THERMAL AND MECHANICAL SPECIFICATIONS				
PARAMETER	SYMBOL	TEST CONDITIONS	VALUES	UNITS
Maximum junction operating temperature range	T_{Stg} , T_J		- 40 to 150	°C
Maximum thermal resistance, junction to case per junction	R_{thJC}	DC operation	0.21	°C/W
Maximum thermal resistance, case to heatsink per module	R_{thCS}	Mounting surface, smooth , flat and greased	0.054	
Mounting torque ± 10 %	IAP to heatsink, M6 busbar to IAP, M5	A mounting compound is recommended and the torque should be rechecked after a period of 3 hours to allow for the spread of the compound. Lubricated threads.	4 to 6	N.m
Approximate weight			140	g
			4.9	oz.
Case style			New INT-A-PAK	

Fig1. Power dissipation

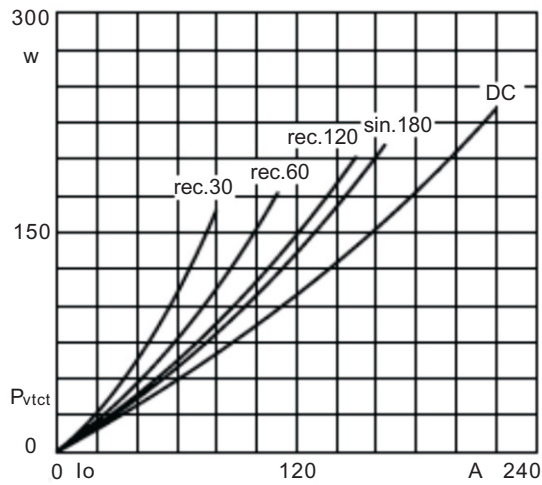


Fig2. Forward Current Derating Curve

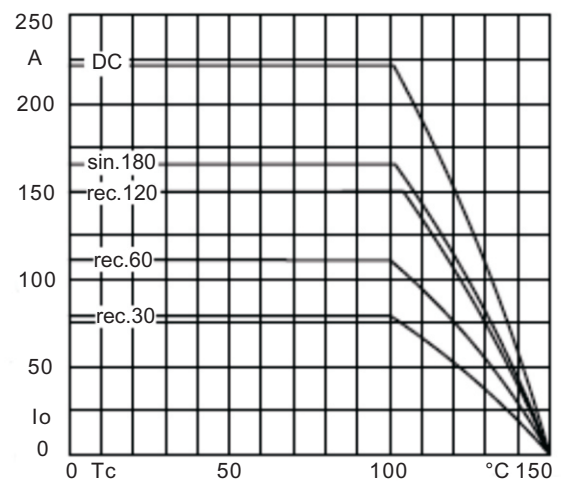


Fig3. Transient thermal impedance

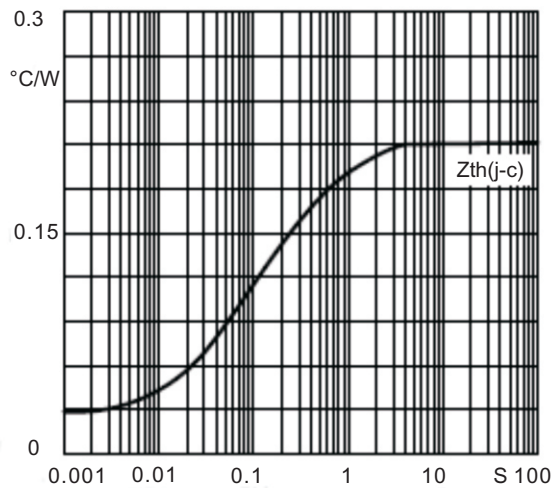


Fig4. Max Non-Repetitive Forward Surge Current

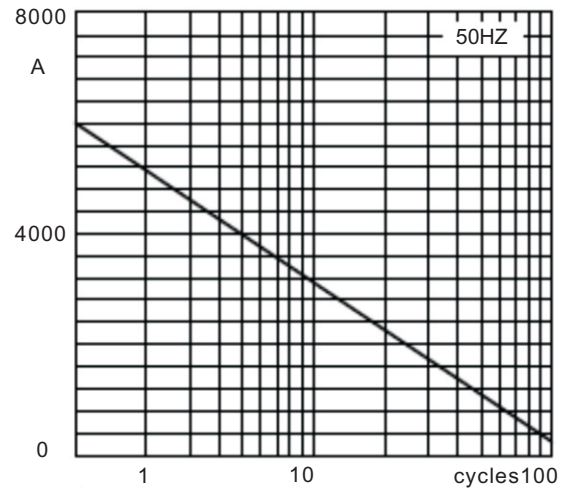


Fig5. Forward Characteristics

